



TECHNICAL DATA

Cycle times (*)	60 / 90 / 180 sec. and special cycles
Water consumption	2.0 l/rack
Tank capacity	23 l
Tank heating	2.5 kW
Power supply	400 / 50 / 3N
Booster loading	
Standard	6.2 kW
Total loading	
Standard	7.1 kW 3 x 16 A
Wash pump	0.7 kW
Rack size	500 x 500 mm
Loading height	440 mm
Noise level	66 dB (A)
Weight (gross / net)	121 / 101 kg


CONNECTIONS

① Drain hose	2,000 mm ID 20 / OD 25
② Supply hose	2,000 mm R 3/4"
Flow pressure	0.5 (0.8 with softener) - 10 bar
Max. supply water temperature	60 °C
Required flow rate	5 l/min
③ Power cord	2,500 mm
Supply hose for	
④ Detergent	2,000 mm
⑤ Rinse aid	2,000 mm

PRODUCT ADVANTAGES

- **VISIOTRONIC Control:** ensures a simple and intuitive operating with a single button. When the display is activated by a proximity sensor, all the necessary information appears in the large display, in clear text or in the form of symbols
- **Exhaust energy storage:** the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 3 kW/h, less humidity in the kitchen area and better hygienic conditions
- **Hood-type dishwasher for straight through or corner operation**
- **Nominal capacity up to 60 racks/h or 1,080 plates/h or 2,160 glasses/h**
- **3 automatic cycles:** short, standard, intensive
- **Ready to install - completely equipped:** fill / drain hose, electrical cable, detergent dispenser, rinse aid dispenser, rinse pump, back-flow preventer (Watermark approved)
- 1 plate rack P-18-12
- 1 universal flat rack B-00-07
- 1 plastic cutlery rack CB8
- **CLIP-IN Wash and Rinse Arms:** both the wash and rinse arms can be lifted out of the wash chamber and replaced with one hand and without any tools
- **EASY-CLEAN Concept:** blue markings in the machine help the operator to identify the components which require cleaning

DIMENSIONAL DRAWING

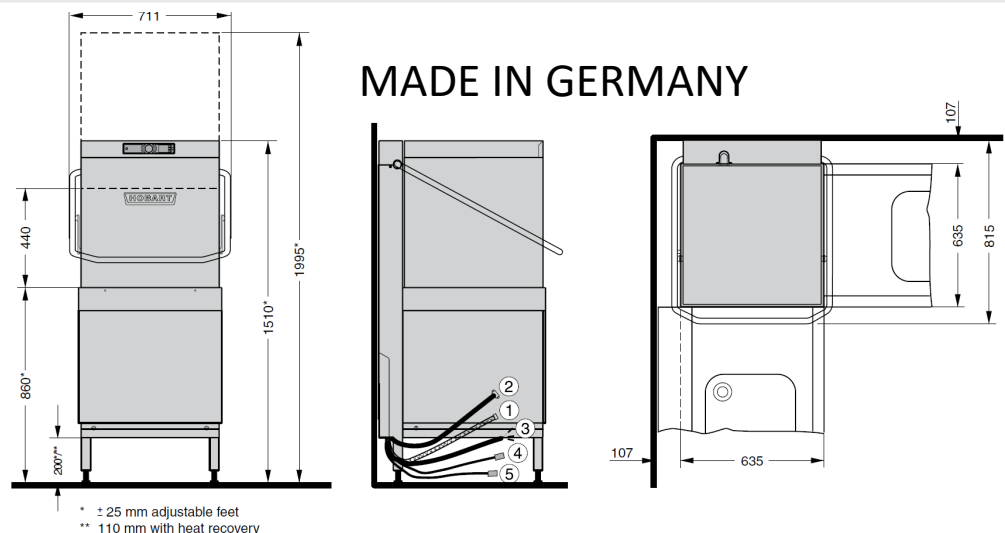

* Thermostop guarantees required rinse temperatures. The actual cycle time extends accordingly if the machine is connected to cold water.

* For corner installations keep the right side of the machine accessible for service.

* For machine protection water hardness should not exceed 3°dH. If higher we recommend using a water softener - ask your Hobart representative for assistance.

MADE IN GERMANY