

Vacc-Safe Medical Refrigerators are suitable for storing vaccines, medicines and laboratory products between 2°C and 8°C in pharmacies, hospitals, medical clinics and laboratories.



### Self Closing Door

Avoid letting the heat in by accident.



### Security

Audible and Visual Alarms. Safety Lock.



### Dual LED Display

High accuracy dual LED displays.



### DC Turbo Fan

Decreases noise level by 8% while increasing efficiency.



### Lockable

Additional security for pharmaceuticals and samples.



### Built-In Air Duct

Increases the effective interior space by 10%.



## High Precision Temperature Control.

Vacc-Safe® vaccine and medical cooling storage enables high precision temperature control and accuracy within 0.1°C giving the utmost confidence that goods are stored with precision. LBA Foaming Technology provides more effective insulation to improve performance and reduce overall energy consumption.




## Increased Space

We have increased the effective interior space by 10% with our built-in air duct and Top Cooling innovation.

## Strong Cooling Airflow.

Strong cooling airflow from the top to the bottom, works as an air curtain to block the external hot air from entering the refrigerator when the door is opened.

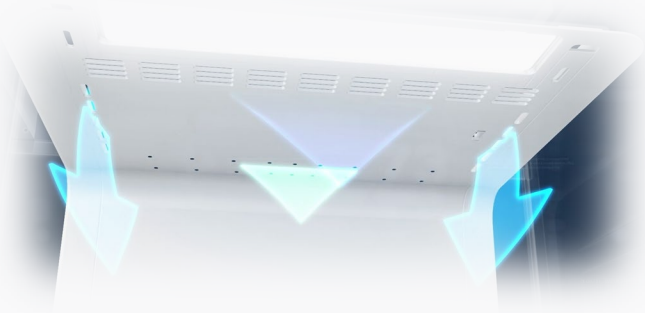

## Improved Cooling Performance.

Our patented Smart-Inverter technology significantly reduces the amount of energy consumed whilst maintaining superior temperature stability. Enjoy improved cooling performance with variations less than 2°C, a 15% reduction in energy consumption and reduced noise level.

| Item                          | Model No.                       | VS1006P                      |
|-------------------------------|---------------------------------|------------------------------|
| <b>Product structure data</b> | Temperature Range               | 2~ 8°C                       |
|                               | Fridge Storage Volume(L)        | 1006L nett                   |
|                               | Product Dimensions(mm) (wxdxh)  | 1220*808*1920                |
|                               | Interior Dimensions(mm) (wxdxh) | 1130*634*1354                |
|                               | Packing Dimensions(mm) (wxdxh)  | 1280*835*2085                |
|                               | Net/Gross Weight                | 220/260                      |
| <b>Technical data</b>         | Compressor type                 | Inverter                     |
|                               | Cooling Type                    | Forced air cooling           |
|                               | Defrost type                    | No frost                     |
|                               | Climate Class                   | N                            |
|                               | Rated Voltage/Frequency(V/Hz)   | 220V/50Hz                    |
|                               | Rated Power(W)                  | 350                          |
|                               | Rated Current(A)                | 2.1                          |
|                               | Decibel rating                  | 60                           |
|                               | Refrigerant/Amount(g)           | R600/60g                     |
| <b>Control</b>                | Temp HI/LOW reset               | Y                            |
|                               | Sensor Qty                      | 6                            |
|                               | Sensor Type                     | NTC                          |
|                               | Controller                      | Microprocessor               |
|                               | Display                         | LED (Temperature & Humidity) |
| <b>Product Performance</b>    | Temperature Accuracy            | 0.1 °C                       |
|                               | Temperature uniformity/°C       | ≤3°C                         |
|                               | Sound Alarm                     | Y                            |
| <b>Alarms</b>                 | Light Alarm                     | Y                            |
|                               | Power Failure Alarm             | Y                            |
|                               | Sensor Failure Alarm            | Y                            |
|                               | Environment Temperature Alarm   | Y                            |
|                               | Door ajar Alarm                 | Y                            |
|                               | High Temperature Alarm          | Y                            |
|                               | Low Temperature Alarm           | Y                            |
|                               | Remote Alarm                    | Y                            |
| <b>Accessories</b>            | USB                             | Y                            |
|                               | Anti-condensation Door          | Electrical heating           |
|                               | Lock                            | Y                            |
|                               | Backup Battery                  | Y                            |
|                               | Backup Battery Endurance        | 24h                          |
|                               | Shelves/Drawers Qty             | 10 Shelves                   |
|                               | Cable Port                      | Y                            |
|                               | Castors/type                    | 4 (Omni directional)         |

