


## UL Recognized Thermoplastic Rubber Grommets

Mounting Hole Diameter Range: 9.5 mm to 50.8 mm



- Convert raw-edged holes to smooth, neat, insulated holes.
- Retaining bead snaps securely into place.
- Insulate and mechanically protect cable, tubing, hose, rope, rods, and shafts.
- UL approved for applications up to 50°C.
- Eleven diameters fit panel thickness from 0.8 mm to 3.2 mm.
- UL Listed Thermoplastic Rubber Grommets also available.

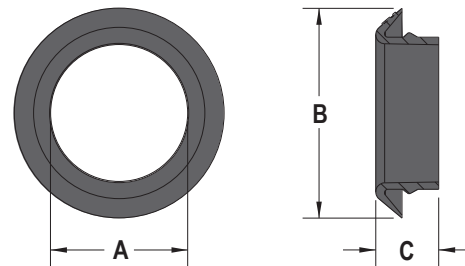

MOUNTING HOLE DIAMETER (mm)	PART NO.	PART DIMENSIONS (mm)		
		A INSIDE DIAMETER	B HEAD DIAMETER	C OVERALL HEIGHT
For panel thickness from 0.8 mm to 2.4 mm				
9.5	<b>13804</b>	7.1	17.8	9.1
12.7	<b>13808</b>	10.4	21.1	
15.9	<b>13813</b>	13.5	24.1	
For panel thickness from 0.8 mm to 3.2 mm				
19.1	<b>13817</b>	16.8	27.2	9.1
22.2	<b>13821</b>	20.1	30.5	
25.4	<b>13824</b>	23.1	33.8	
27.8	<b>13828</b>	25.7	36.1	
31.8	<b>13831</b>	29.0	39.9	
34.9	<b>13833</b>	32.0	43.2	
38.1	<b>13835</b>	35.3	46.5	
50.8	<b>13840</b>	48.0	59.2	

### Quick Specs

<b>Material</b>	Flex Temp (Thermoplastic Rubber)
<b>Certifications</b>	Recognised under the Component Program of Underwriters' Laboratories, File E15331
<b>Flammability Rating</b>	94-HB
<b>Temperature Range</b>	0°C to 50°C