



INDUSTRY  
PRESENTATION

2021

# BUILDING INDUSTRY.

PROCESS

CONTROL

# WE, THE HIGHEST STANDARDS.

The **UNI EN ISO 9001:2008** certification guarantees the quality of our products and the organization of the working group.

It therefore ensures **punctuality** and the respect of the delivery timetables agreed with our clients, the correct **industrial operations** and the compliance with compulsory regulations as requested by the **European Committee for Standardizations**.

# WE, OVER 40 YEARS OF EXPERIENCE.

Heavy duty structure machines and lines for long life working.

High level designed and innovation.


High quality brand equipment's

Efficient pre / after sales support all over the world.



HISTORY

HERITAGE

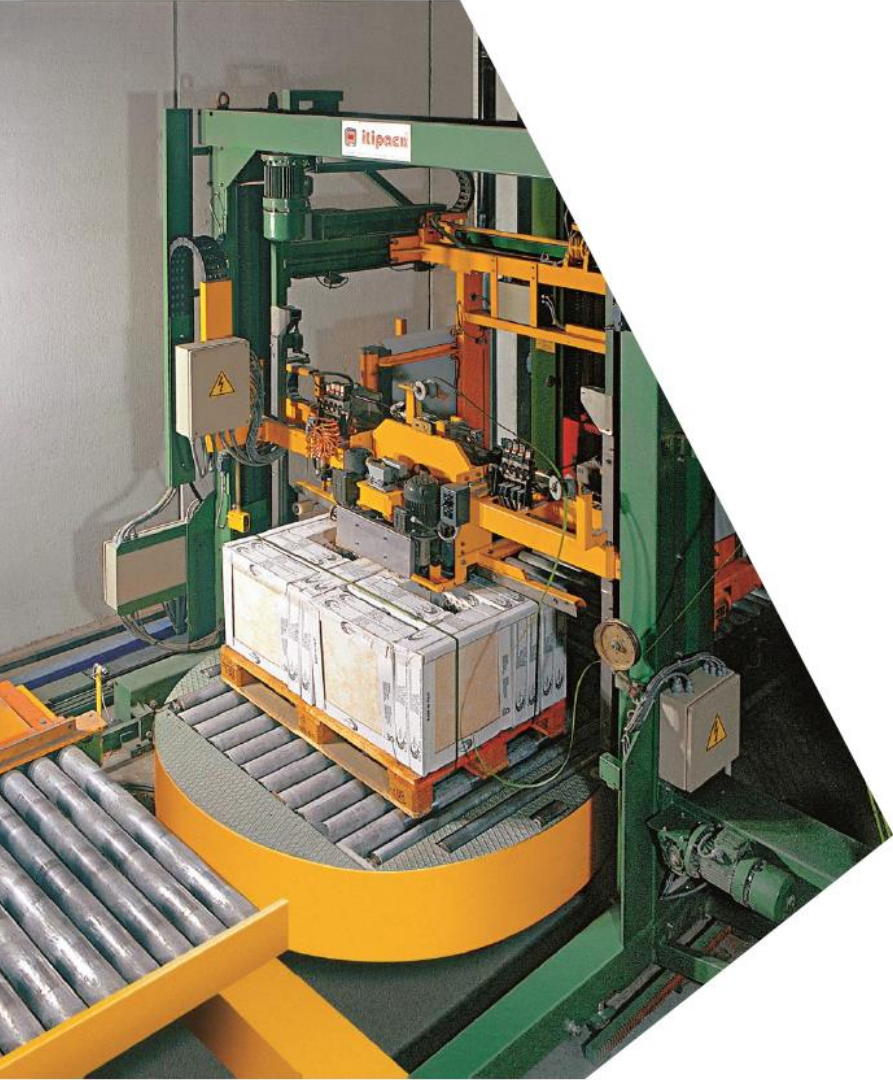

A company **attentive** to the requests of the market.

The **R&D** department is always looking to  
improve the known technologies and **develop**  
**new** technologies and **products**.



# WE, MANUFACTURING QUALITY.

A works area of 11,000 sq.m

Hundreds of machines exported all over the world every year,  
solidity which springs from continuous investment in  
advanced technologies and the certainty of a world leader.




TECHNOLOGY

RELIABILITY

# WE, YOUR SAFETY.

**A SIMPLE GOAL:  
YOUR GOODS AROUND THE  
WORLD IN TOTAL SAFETY.**

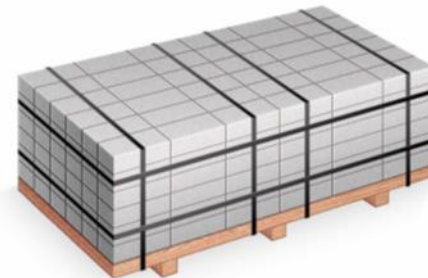

WE,  
DELIVERING  
EXCELLENCE.



PROJECT

CUSTOMIZATION

## EXPERIENCE AT 360°

BRICKS

BLOCKS

TILES


ROLLS

CERAMICS

CONCRETE



VKC/FG.

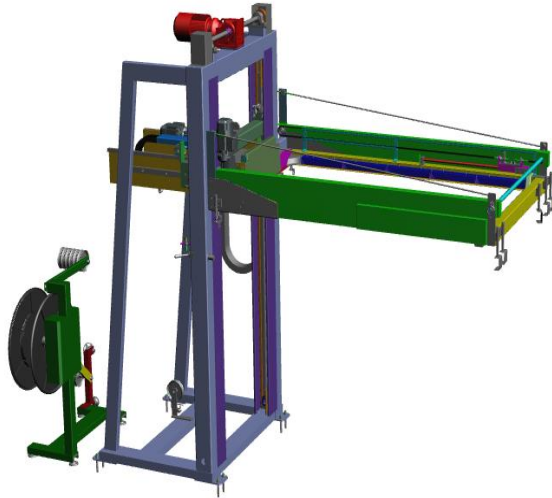


BUILDING

STANDARD

HEAD	FEATURES	FEATURES
<b>PET</b> 9-16 mm 16-19 mm	<b>STRAP GUIDE</b> For precision positioning	<b>SIEMENS</b> PLC and HMI
<b>1800N – 4500N</b> tension	<b>HEAD STROKE</b> 300 mm	<b>AUTOMATIC POSITIONING</b> head trolley
<b>THERMO</b> welding	<b>PROTECTION</b> against dust	<b>INVERTER</b> head truck control
<b>STRAP TENSION</b> balance device	<b>20-70-150 Kg</b> strap dispenser	<b>SAFETY</b> pneumatic pins

# VKC/F4P.

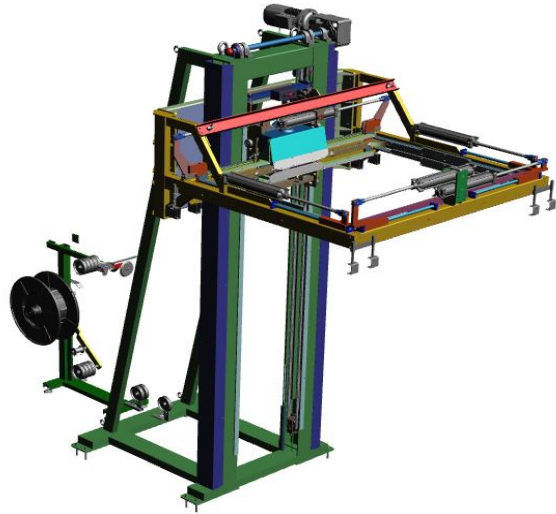

BUILDING

STANDARD

## HEAD

### PET

9-16 mm 16-19 mm

## FEATURES

### STRAP GUIDE

for precision positioning

## FEATURES

### SIEMENS

PLC and HMI

## 1800N – 4500N

tension

## HEAD STROKE

300 mm

## AUTOMATIC POSITIONING

head trolley

## THERMO

welding

## COMPRESSION

on package side

## INVERTER

head truck control

## STRAP TENSION

balance device


## 20-70-150 Kg

strap dispenser

## SAFETY

pneumatic pins

# VKC/F4G-APF-VM.

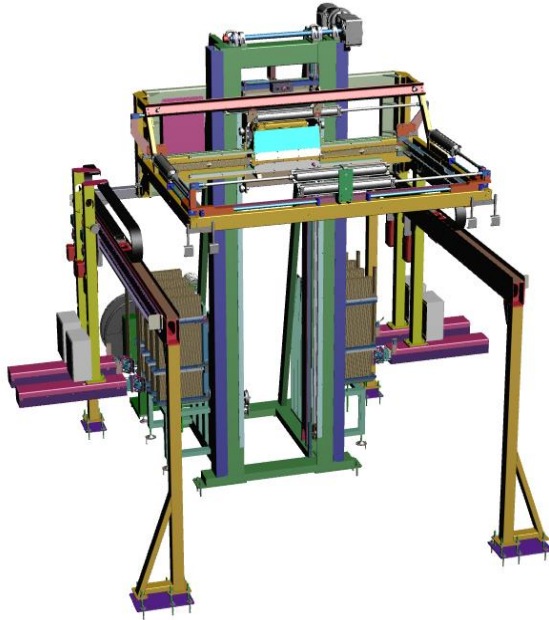

BUILDING

SPECIALS

## HEAD

**PET**  
9-16 mm

## FEATURES

**STRAP GUIDE**  
for precision  
positioning

## FEATURES

**SIEMENS**  
PLC and HMI

**1800N**  
tension

**HEAD STROKE**  
300 mm

**COMPRESSION**  
on package side

**THERMO**  
welding

**4 CORNERS**  
application

**INVERTER**  
head truck control

**STRAP  
TENSION**  
balance device

**20-70-150 Kg**  
strap dispenser

**SAFETY**  
pneumatic pins

**VKE/MRL.**



**BUILDING**

**STANDARD**

**HEAD**

**PET**

9-16 mm 16-19 mm

**FEATURES**

**MOVABLE**

on rails

**FEATURES**

**SIEMENS**

PLC and HMI

**1800N – 4500N**

tension

**ENCODER**

translation control

**AUTOMATIC  
POSITIONING**

head trolley

**THERMO**

welding

**BAYONET**

for pallet strapping

**INVERTER**

head truck control

**STRAP  
TENSION**

balance device

**20-70-150 Kg**


strap dispenser

**SAFETY**

pneumatic pins



**VKB/FLN.**

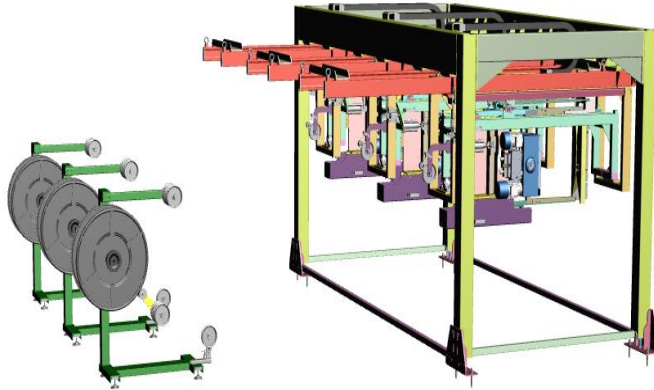

TILES

SPECIALS

**HEAD**

**PET**  
9-16 mm

**FEATURES**

**EXTRACTION**  
for maintenance

**FEATURES**

**SIEMENS**  
PLC and HMI

**1800N**  
tension

**STRAP**  
inclination for tiles

**COMPACTING**  
device integrated

**THERMO**  
welding

**BAYONET**

**INVERTER**  
head truck control

**STRAP**  
**TENSION**  
balance device

**20-70-150 Kg**  
strap dispenser

**SAFETY**  
pneumatic pins

**CFT.**




**BUILDING-ROLLS**

**STANDARD**

HEAD	OPTION	FEATURES
<b>PET</b> 9-13 mm	<b>2 HEAD SETS</b> at fixed height	<b>SIEMENS</b> PLC and HMI
<b>2000N</b> tension	<b>2 HEAD SETS</b> 1 movable	<b>DOUBLE 20 Kg</b> strap dispenser
<b>THERMO</b> Welding	<b>3 HEAD SETS</b> 1 movable	<b>VERY FAST</b> cycle time
<b>FRICTION</b> welding	<b>LABELLING</b> on strap application	<b>ZERO IMPACT</b> on existing conveyors

# ROTATING TABLES.

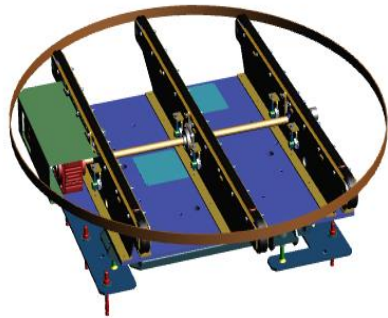

OPTIONS

TURNKEY

**TYPE**

3 x 1" chains  
or rolls

**FEATURES**

10 m/min

**FEATURES**

1500 Kg  
product payload

**TEMPERED**  
components

**DUST-PROOF**


**SOFT**  
start and stop

**INVERTER**  
control

**ADJUSTABLE**  
height +/- 30 mm

**CUSTOM**  
design

# UNIQUE FEATURES.

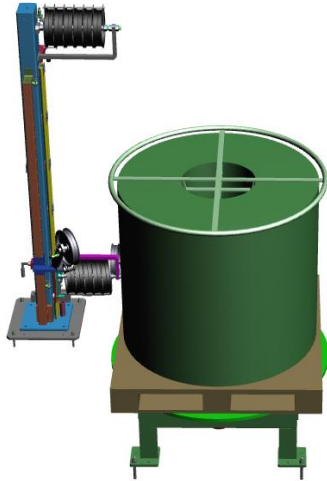

TIME SAVING



EASY MOVIMENTATION AND LOADING



MORE AUTONOMY, PAYLOAD UP TO 1 TON



OPERATOR'S SAFETY, NO MORE COILS LIFTING AS PER ISO 11228



OPTIMIZED STRAP WASTE



LESS RESIDUAL PACKAGING DISPOSAL

FOCUS


IMPROVEMENT





**itipack**  
ADVANCED PACKAGING TECHNOLOGY



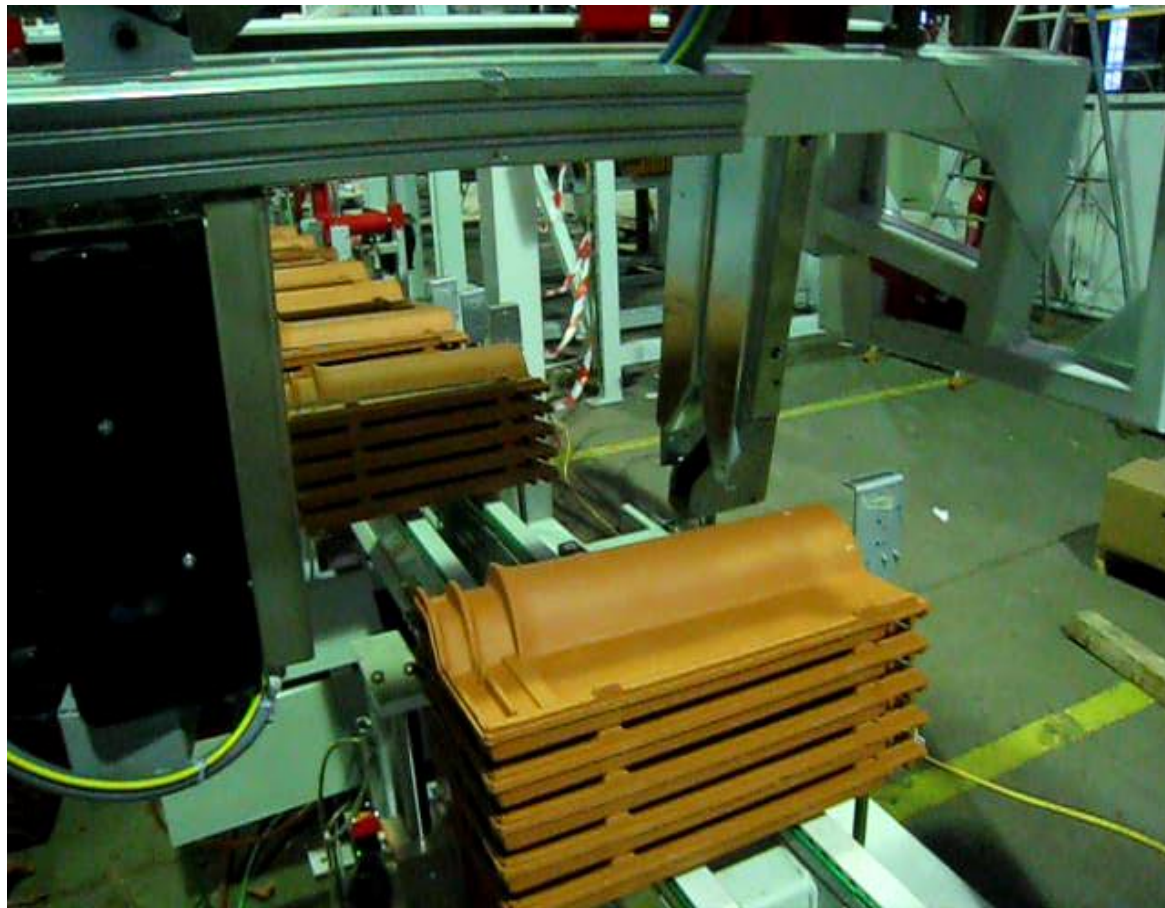







WE,  
TAKING THE WORLD  
ONE STRAPPING  
AT THE TIME.

There's only one growth strategy,  
**WORKING HARD.**