



## COMMERCIAL DRYER (FRONT CONTROL) FOR ON-PREMISES LAUNDRY APPLICATIONS

### CD10E - CD10G

8,2 KG

## FEATURES

- **Superior airflow**
  - Advanced blower system produces airflow of 220 cu. Ft. per minute
  - Fast-drying results with advanced airflow pattern
  - Minimum dry time
- **Large capacity**  
Large 7.0 ct ft. cylinder
- **Door opening of 2.06 sq. ft. for fast and easy loading and unloading**
- **Time savings**  
Large, easy-clean lint filter is located upfront

## CONTROL

- **Micro-Display Control (MDC)**  
Offering the most essential features and programming options, the Micro-Display Control (MDC) on IPSO commercial dryers is user-friendly and features an attractive, easy-to-read design
- **Coin countdown start**  
Displays vend price and countdown coin and cycle time
- **Touch pad control**  
Offers touch pad selection and combines both temperature and cycle
- **Sound and light indicators**  
Indicate cycle status and coin validation
- **Activation options**  
Available with coin drop installed, card ready or coin ready models
- **Manual programming and audit**  
Program and audit use via the control panel



Speak with a Laundry Specialist

t: 1300 222 119 e: [info@aqualogic.com.au](mailto:info@aqualogic.com.au) w: [aqualogic.com.au/contact](http://aqualogic.com.au/contact)




	CD10E	CD10G
MODEL NUMBER	BDEBLBGS433AW01	BDGBLBGS303AW01 BDGBLBCW543NW01
CONTROL	MDC	MDC
CONTROL LOCATION	45° front	45° front
DRUM		
CAPACITY (KG)	8,2	8,2 (BDGBLBGS303AW01) 10,5 (dry) -15 (wet) (BDGBLBCW543NW01)
CYLINDER VOLUME (L)	198	198
MOTOR		
POWER (KW)	0,25	0,25
CABINET		
CYLINDER FINISH	galvanized	galvanized
COLOUR	white	white
DOOR TYPE	solid	solid (BDGBLBGS303AW01) window (BDGBLBCW543NW01)
HEATING		
HEAT SOURCE	electric	gas
HEATING POWER	4 000 kW	25 000 BTU
CONNECTION		
GAS INLET CONNECTION (MM)	N/A	9,5
EXHAUST OUTLET DIAMETER (MM)	102	102
EXHAUST AIRFLOW (LITERS/SEC)	105	105
OPERATION		
CYCLES	4	4
CYCLE INDICATOR LIGHTS	yes	yes
POWER		
ELECTRICAL REQUIREMENTS	240V / 50Hz / 1Ph	240V / 50Hz / 1Ph (BDGBLBGS303AW01) 220V/60H/1ph (BDGBLBCW543NW01)
TRANSPORT DATA		
GROSS WEIGHT (KG)	73	73
NET WEIGHT (KG)	68	68
DIMENSIONS H X W X D (MM)	1027 x 683 x 711	1027 x 683 x 711 (BDGBLBGS303AW01) 1114 x 683 x 711 (BDGBLBCW543NW01)
PACKING DIMENSIONS H X W X D (MM)	1156 x 762 x 864	1156 x 762 x 864
VOLUME (m <sup>3</sup> )	0,76	0,76

\* heights may slightly vary, depending on the leveling adjustments


(mm)	A*	B*	C*	D*	E	F	G*	H	I	J	K	L	M
CD10- ELECTRIC	1027	1006	392	102	391	683	114	10	203	711	597	-	-
CD10 - GAS	1027	1006	392	70	60	391	683	102	114	10	203	711	597

\* With leveling legs turned into base  
Exhaust openings are 102mm metal ducting.

electric

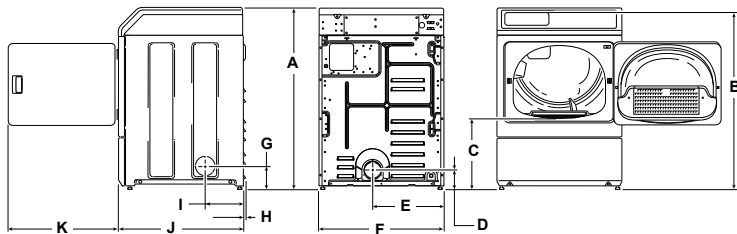

gas

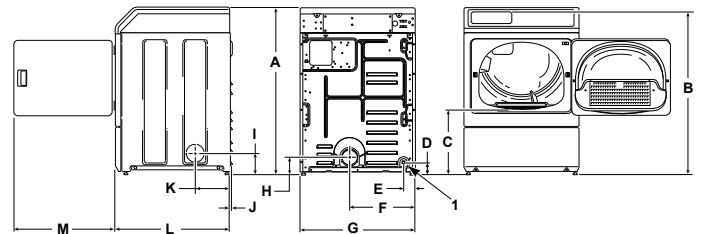

Speak with a Laundry Specialist

t: 1300 222 119 e: info@aqualogic.com.au w: aqualogic.com.au/contact

