

specifications

SIRCHIE Refrigeration

RF7.UBR.3.D9

ReFlex Series, 9 Drawer, Underbench Fridge



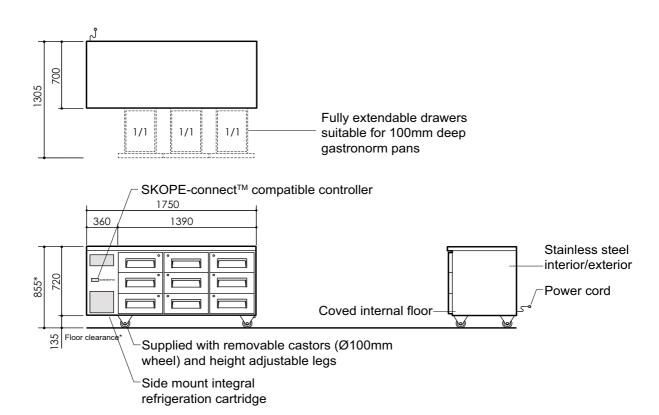

Drawers 9 × fully extendable, refrigerated, stainless steel drawers with individual

key locks.

3-banks of full drawers including stainless steel sheet base and sides. Fits

GN1/1, 100mm deep pan as an insert (supplied separately).

Shelves n.a

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating

cyclopentane foamed core)

Material 304 AISI stainless steel interior and exterior

ELECTRICAL

Interior lighting n.a.

Power cord Supplied with 2.6m, 10 Amp plug and lead Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.5 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable refrigeration cartridge (part number

ULKCNI-0041)

Refrigerant R290 / 95g (natural refrigerant)

Nominal capacity 650 Watts

Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020

DIMENSIONS

	External	Internal		
Height	855mm*	570mm		
Width	1750mm	1280mm		
Depth	700mm	530mm		
Floor area	1.23m ²	•		
Weight	184 kg			
Internal volume	387 litres			

^{*} With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements

ventuation requirements		
Тор	Not required	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0672 Rev. 1.0 May 202



