


## LINEAR VIBRATORY WEIGHFILLER LVF-34A/B

The LVF-34A/B linear vibratory filler with one or two heads offers the most suitable solution to weigh and fill all kinds of **diced & sliced IQF fruits and vegetables, dried non sticky fruits, candy, ...**

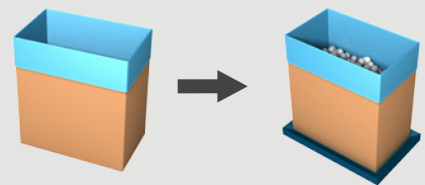

One head vibratory filler  
LVF-34A

COMBINE  
CONVENIENCE &  
ACCURACY

**Easy to use**  
**Easy to clean**

- Your ideal solution for **easy weigh filling** up to 10 c/min.
- Hygienic design.
- **Quick & easy cleaning** for minimum down-time.
- Filling in **weigh hopper**.
- Integrated **bag holding device**.

# TECHNICAL SPECIFICATIONS LVF-34A/B

## Easy weigh filling

- Linear filler with 3 vibrating pans: one for taking the product out of the bunker, one big pan for coarse filling and one small pan for fine dosing.
- Constant product flow during fine filling.
- Product overflow from small vibrating pan to coarse filling pan.

## Net filling in weigh hopper

- High line speed, no down time during box transfer.
- Afterfall height for fine filling is low.

## Easy to clean

- Weigh hopper with quick release reduces your cleaning time and cleaning cost.

## For dry bulk products up to 60 x 60 x 60 mm

- IQF fruits & vegetables
- Dried non-sticky fruits
- Candy
- ...

## Standard equipped with

- Colour touch panel for easy operation




Coarse and fine filling



Filling in weigh hopper

CONTAINER SPECIFICATIONS (For other dimensions, please contact Pattyn)	
Type	Cases, trays, plastic crates...
Range (L x W // D) mm	Min. 300 (L) x 200 (W) // 100 (D)
	Max. 800 (L) x 500 (W) // 650 (D)
	<p style="text-align: right;">Outside dimensions</p>
OUTPUT AND CONSUMPTION	
Output	<b>LVF-34A one head vibratory filler</b> Up to 6 c/m (depending on product and weight)  <b>LVF-34B two head vibratory filler</b> Up to 10 c/m (depending on product and weight)
Product diameter size	Max. 60 x 60 x 60 mm
Installed power	LVF-34A: 5 kW LVF-34B: 9 kW
Voltage	3 x 400 V + N + E / 50 Hz
Air supply	6 bar / 1/8" min
Air consumption	4 NI / cycle
Weight	One head filler: 600 kg Two head filler: 1000 kg
OPTIONS (More options are available, please contact Pattyn)	
	Dimple plate execution
	Heating element to prevent condensation
	Access point for remote support

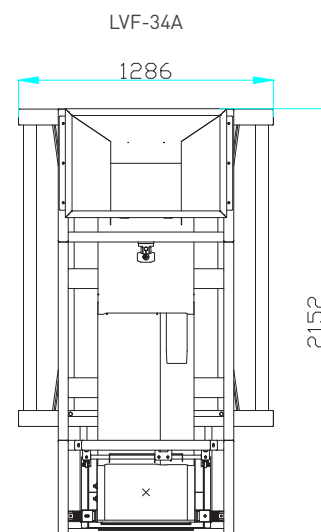

Machine height 3127 mm

Machine height as reference only, depending on case dimensions.

**Accuracy depends on the product and capacity.  
For more details or specific requirements, please contact us.**

Pattyn Packing Lines nv  
Industriepark 'Blauwe Toren'  
Hoge Hul 2, 8000 Brugge - Belgium

T +32 (0) 50 450 480  
info@pattyn.com  
www.pattyn.com



The description, pictures and information given have an indicative value. We reserve the right to make changes without notice. Information and content is property of Pattyn. For customised executions please contact Pattyn. LVF-34A/B 2018 - V01

**PATTYN®**

Turnkey solutions for industrial packaging.