

# Speedlane Swing



**The Speedlane Swing, part of the Lifeline series, is the slimmest speed gate, combining customisability with high design and security for accurate tailgating and piggybacking protection.**

The Speedlane Swing has been designed to the highest standards, ahead of industry trends:

- Using unique sensors which detect visitors approaching
- Sleep function to save energy
- Pulsing light strips to guide the user
- Intuitive and proven symbols to make it user friendly
- Ergonomic design for customer comfort
- Customisation possibilities in fitting with interior design
- Premium quality materials

#### **Options**

- Single lane or multiple lane set-up
- Jump over detection sensors
- External control panel






## Dimensions and Specifications

Type	A Passage Width (mm)	Capacity / Minute*	# of Door Wings	Disabled Access	Type of Traffic	B Overall Width (mm)	D Door Wing Height (mm)	E Unit Height (mm)	F Unit Length (mm)
Standard	500	25-30	1	×		712	940	1035	1776
High	500	25-30	1	×		786	1200-1800	1035	1776
Standard 2-wing	615	25-30	2	×		827	940	1035	1776
High 2-wing	615	25-30	2	×		975	1200-1800	1035	1776
Wide	915	25-30	2			1127	940	1035	1776
High & Wide	915	25-30	2			1275	1200-1800	1035	1776

\* Depending on access control system, in one direction

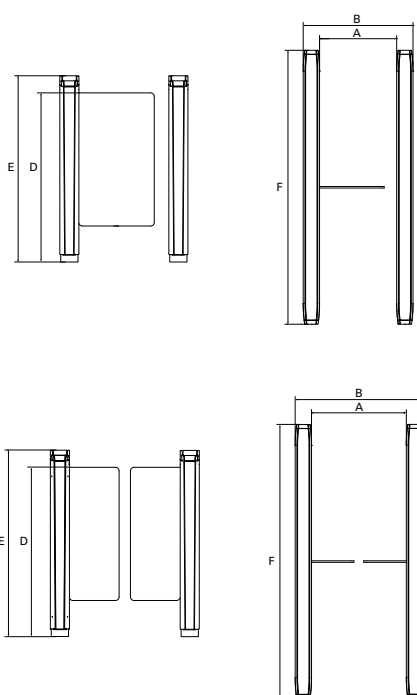

## Customisation

The Speedlane Swing is available with the widest selection of dimensional and glass choices. Whether it's for a higher security level or disabled access, every combination is possible. Due to its slim form, an almost

invisible gateway is created, instantly giving an air of sleek design. Whether making a statement, fitting with corporate identity colours or creating a harmonious interior design, the Speedlane Swing can be customised to the latest design trends, offering the opportunity to blend-in or stand-out from its surroundings.

## BoonTouch

The BoonTouch is a universal control panel which can be used to operate the Speedlane Swing remotely, from a reception area or security desk. It is able to operate any combination of up to six security access solutions. With a user friendly interface, the BoonTouch allows for the control of individual lanes, multiple lanes and to control an alarm situation.

## Technical Specifications

Power Supply: 110-240 VAC, 50/60 Hz

### Power Consumption

Operating: 80W

Stationary: 60W

Sleep Mode: 40W

Ambient Temperature: -15°C to +50°C

Weight: 200 kg