

NW 608



Modular Ice Machine up to 320 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 608
Dice 10 g
L 22 x P 22 x H 22 mm



NW H 608
Half Dice 6 g
L 10 x P 22 x H 28 mm



NW L 608
Large Dice 15 g
L 28 x P 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head	Bins		kg
NW 608	✓	SB393	181
	✓	SB530	243
	CBT48EAMCD	SB948	406

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 320 kg




NW 608



Modular Ice Machine up to 320 kg

Item #:
Project:
Quantity:


Modular Ice Machine up to 320 kg

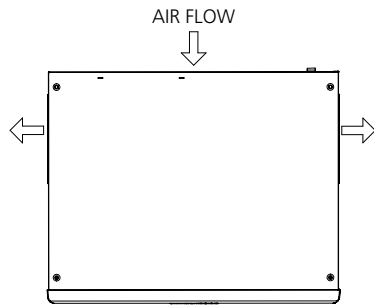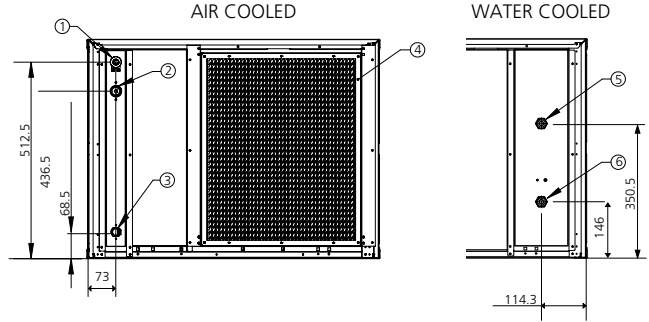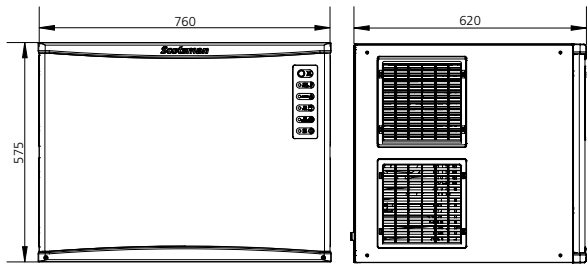

UNIT OF MEASUREMENT: mm

UNIT OF MEASUREMENT: mm

- 1. CORD SET
- 2. 3/4" GAS WATER INLET
- 3. 13/16" OD - WATER OUTLET
- 4. AIR INLET / AIR FILTER
- 5. 3/4" GAS-WATER OUTLET
- 6. 3/4" GAS-WATER INLET
WATER COOLED UNIT ONLY

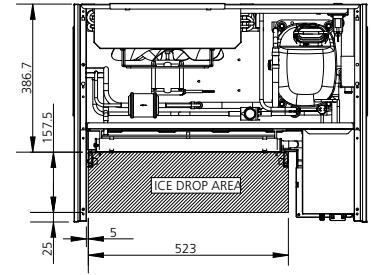

UNIT DATA	Compressor				Circuit wires		Max. fuse size
	Version	Voltage	Btu/h	W	No.	Ømm ²	A
Size (W x D x H)	760 x 620 x 575 mm						
Net weight	78 kg						
SHIPPING DATA	Carton (W x D x H)	830 x 690 x 770 mm					
	Weight	92 kg					
	NW 608 AS	230/50/1	16549	4850	3	1.5	16
	NW 608 ASR	230/50/1	0				
	NW 608 WS	230/50/1	0				
	NW 608 AS	230/60/1	16549	4850	3	1.5	16
	NW H 608 AS	230/50/1	16549	4850	3	1.5	16
	NW H 608 AS	230/60/1	16549	4850	3	1.5	16
NW H 608 ASR	230/50/1	0					
NW H 608 WS	230/50/1	0					
NW L 608 AS	230/50/1	16549	4850	3	1.5	16	
NW L 608 WS	230/50/1	0					

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 608 AS	Air	230/50/1	315	290	230	15.9	36.5	15.8	1600
NW 608 ASR	Remote	230/50/1							
NW 608 WS	Water	230/50/1							
NW 608 AS	Air	230/60/1							1600
NW H 608 AS	Air	230/50/1	320	290	225	15.0	33.7	16.5	1600
NW H 608 AS	Air	230/60/1							1600
NW H 608 ASR	Remote	230/50/1							
NW H 608 WS	Water	230/50/1							
NW L 608 AS	Air	230/50/1	310	285	210	16.5	34.7	14.5	1600
NW L 608 WS	Water	230/50/1							

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions