



MODEL

Q90BR/G80

CODE

CR1018189

GAS BRATT PAN - MANUAL TILTING 80 LT

QUEEN9

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas kitchens having burners with various configurations and power ratings: 3.5 kW 5.7 kW, 7 kW and 10 kW
- Double-ring burners for 7 and 10 kW models
- Wide range of accessories

Technical / functional characteristics

- Water filled via solenoid valve
- Self-balanced lid with double steel wall
- · Safety device interrupting power supply when tub is lifted
- Adjustable temperature from 100 to 280°C.
- Stable flame burner;
- Electric ignition
- Thermocouple safety valve



DIMENSIONS	
Width (mm)	800
Depth (mm)	900
Height (mm)	900
Gas connection (Ø)	3/4"
Electric connection (V/~/Hz)	230V/1N 50 Hz
Cold water connection (Ø)	3/4"
Hot water connection (Ø)	

SCOTS ICE AUSTRALIA


Cold soft water connection (Ø)	
Drain (Ø)	
Gas power (Mj/hr)	73.6
Electric power (kW)	0.2
Plate dimensions (mm)	
Tank capacity (L)	80
Tank dimensions (mm)	
Internal oven dimensions (mm)	



MODEL

Q90BR/G80



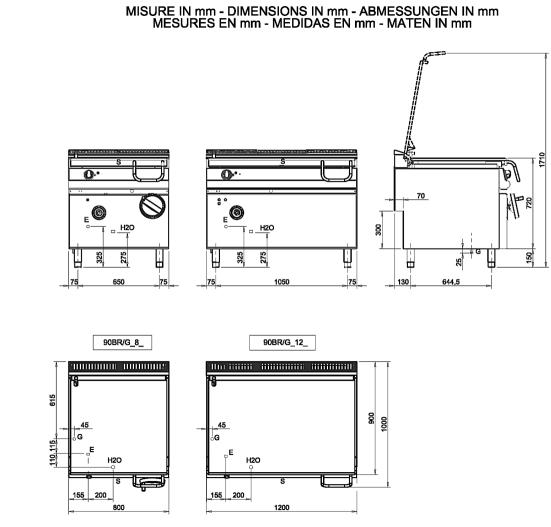

CODE

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

CR1018189

Legenda – Legende – Key – Légende – Leyenda – Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él Pisacable – Elektrische kabelwartel
- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz Union de gas Gasaansluiting
- H2O Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau Union de agua Ateraansluiting EN ISO 228-1 G 3/4
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac Descarga cuba Water toevoer