

ZW-5 series

**HITACHI**

Reliable solutions

**ZW550**



## **WHEEL LOADER**

Model Code : ZW550-5B

Max. Engine Power : 396 kW (531 HP)

Operating Weight : 47 210 - 48 020 kg

Bucket ISO Heaped : 5.6 - 6.8 m<sup>3</sup>



# WALK AROUND

## CONTENTS

### 4-5 Comfort

A comfortable work space enhances operational efficiency.

### 6-7 Advanced technology

Hitachi is renowned for manufacturing technologically advanced machines that deliver an outstanding level of performance.

### 8-9 Environmental awareness

The ZW550-5 has a positive effect on levels of safety and sustainability.

### 10-11 Productivity

New hydraulics and gearshift systems, plus enhanced manoeuvrability, ensure high productivity.

### 12-13 Maintenance

Daily inspections can be carried out quickly and easily to increase the availability of the ZW550-5.

### 14-15 Hitachi Support Chain

Customers can choose from a comprehensive range of after-sales services.

### 16-19 Specifications

### Advanced technology

The quick power switch boosts the power of the ZW-5 wheel loader when required by changing the work mode.

### Lower fuel costs

The new ZW-5 wheel loader can work in two modes, which provide an appropriate level of performance for the specific job. One mode is for regular operations with the benefit of efficient fuel consumption; the other is for more demanding tasks and increases productivity.

### High productivity

A new hydraulic circuit facilitates the combined operation of the bucket and lift arm for loading and prioritises the use of the bucket for loading work.

### Sustainable operation

A muffler filter captures air pollutants, which are automatically burnt thanks to an oxidation catalyst and exhaust temperature control.

### Powerful engine

The 15.68-litre six-cylinder water-cooled turbo engine enables a powerful digging performance, impressive travel speeds and benefits from excellent fuel consumption.

### Heavy-duty axle

Hitachi axles are renowned for high performance and durability – ideal for working on demanding job sites.



# ZW550



The new Hitachi ZW550-5 wheel loader has been designed with one aim in mind: empowering your vision. Productivity, comfort, advanced technology, environmental performance and maintenance, it delivers on all levels. It not only meets our customers' expectations of high-quality, reliable machines, but also provides operators with a safer working environment, a comfortable cab with easy-to-use controls, and overall, a machine that responds quickly and precisely. To ensure optimum availability of the new ZW550-5, we have incorporated easy maintenance features into its design. We also offer the flexible Hitachi Support Chain after-sales program to customers who wish to further enhance its uptime and protect their investment.

### Spacious cab

The heated air-suspension seat can slide back further, providing more legroom. The tilting telescopic pop-up steering column has also been repositioned to create additional space.

### Ultimate comfort

An air-conditioning system regulates the temperature inside the cab and a double filter is provided as standard equipment for dusty environment such as industrial waste job sites. Sound insulation reduces noise levels from the local environment.

### Easily accessible information

The new large multi-function LCD screen displays information at a glance and the adjustment function to the operator.

### Excellent visibility

A windshield without pillars and a large sun visor enhance visibility levels from the operator's seat.

### Controlled movement

A new clutch cut-off system allows for smooth operation when the ZW-5 wheel loader is loading.

### Quick and easy access

The redesigned engine cover provides easy access to inspection points and allows for quick maintenance.

### Transmission control

The automatic transmission selects the appropriate gear for travelling and digging.




The photos in the brochure are taken using the machines for Europe and Japan. The specification in Australia may be different from that of the photos.



# COMFORT

Like all Hitachi ZW-5 wheel loaders, the largest model offers a spacious and comfortable workspace, designed to make your day more enjoyable and less tiring. Following extensive customer feedback, Hitachi engineers made several adjustments to the cab to create additional space, provide excellent visibility of the job site and make the ZW550-5 easier to operate with user-friendly features. Their ultimate aim was to enhance the operator's overall experience, allowing you to get the job done with ease and in comfort.

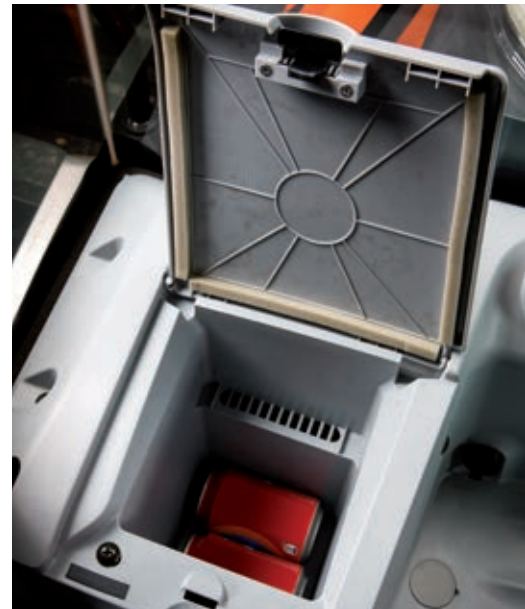

The machine in the pictures may include optional items. Please consult your Hitachi dealer for the available optional items.



# For operator comfort, the ZW-5 series is second to none



## Take a seat

Hitachi has prioritised operator comfort in the design of the ZW-5 range of wheel loaders to give you a greater sense of enjoyment during your working day.

The sloped ladder and wide steps allow quick and easy access to the cab. The heated air-suspension seat with adjustable lumbar support can slide back further than ever before, allowing more leg room. The wrist and arm rests and right-hand side console can be adjusted to achieve a comfortable sitting position, and the tilting telescopic and pop-up steering column have also been repositioned to create additional space.

## Pleasant working conditions

Busy construction sites and quarries can be stressful environments to work in, but Hitachi has installed a range of features in the new ZW-5 wheel loaders to make you feel more relaxed wherever you are.

An effective air conditioning system regulates the temperature within the cab. A double air-conditioning filter is provided as standard equipment for dusty environment such as industrial waste and indoor disposal facilities. High levels of sound insulation ensure noise levels within the cab are reduced.

## Space for storage

Working long shifts mean that you spend most of your day in the cab of the ZW-5 wheel loader. Hitachi has incorporated several practical features to make you feel more at home.

There is a large space for a lunch box behind and at the side of the seat. The cab also has a large cool box, which is cooled by the air conditioner, with enough storage space for four cans or bottles. Another feature of the cab is the drink holder, designed to hold a 1.5-litre bottle.

## Enjoy your day

A happy operator is also a more productive one. That's why we have enhanced the versatility of the audio equipment, so you can listen to your favourite music while you work.

The AM/FM stereo radio now has an auto-tuning feature and the two-speaker stereo system provides excellent sound quality. The inclusion of an MP3 dock allows you to connect your personal MP3 player. The new multi-function LCD monitor has a large seven-inch screen and it provides a wide range of useful technical information.

## Key features

■ Heated air-suspension seat

■ Expansive leg room

■ Ergonomically designed control panel

■ New colour LCD monitor

■ Effective air conditioning

■ Tilting telescopic and pop-up steering column

■ Easy access via sloped ladder and wide steps

■ AUX terminal and storage for MP3 player






# ADVANCED TECHNOLOGY

Several new features on the ZW-5 wheel loader range highlight the developments Hitachi has made in advanced technology. Such advancements have enabled it to manufacture high-quality machines capable of boosting productivity levels on the job site, with significantly lower levels of fuel consumption. This brings the benefits of reduced running costs and a smaller impact on the environment compared to the previous model, but without compromising on efficiency.





# A superior performance is guaranteed

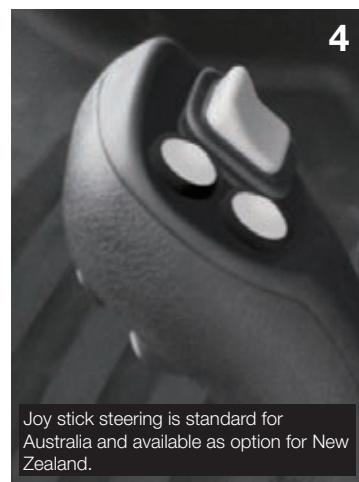

## Simple work mode ①

The new ZW-5 wheel loader can be operated in two modes to ensure lower fuel consumption and maximise productivity: Standard mode is for regular duties such as loading materials; and P mode is chosen for more demanding tasks such as heavy duty digging.

In Standard mode, the engine speed is controlled, which allows for smooth and efficient acceleration during loading, regular operations and travelling on level terrain. Fuel consumption is reduced by up to 10%, enhancing the environmentally friendly performance.

The P mode is useful when greater traction force is required for heavy-duty excavation and travelling uphill. By fully utilising the engine's capability, it allows for powerful digging and a quick ascent up gradual slopes.

## Quick power switch ②

The operator can boost the power of the ZW-5 wheel loader at the push of a button. The Quick power switch changes the mode from Standard to P and can be used when travelling uphill with a full load or when greater breakout force is required.


## Clutch cut-off ③

The new clutch cut-off system controls clutch timing for a smoother operation, according to travel speed and the pedal depression level. When travelling at high speed on flat terrain, the clutch can be released early so the wheel loader slows down smoothly with the application of the brake pedal.

When travelling slowly uphill, the clutch is released by deeply depressing the pedal to allow for easy unloading.

## User-friendly operation ④

The Joystick Steering System enables operators to reach high levels of productivity with effortless steering, and incorporates a number of useful functions. It is available as option for New Zealand.

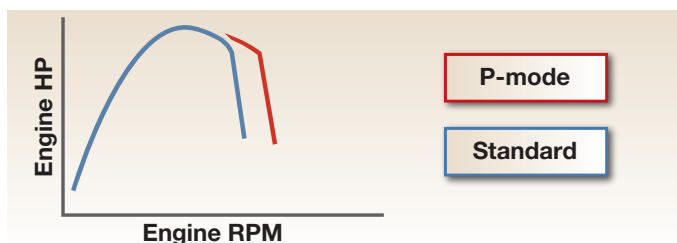

## Key features

- Simple work mode
- Quick power switch
- Clutch cut-off
- User-friendly operation



# ENVIRONMENTAL AWARENESS

Designed to have a reduced impact on the environment as well as a positive effect on the quarry or construction site, the new Hitachi ZW550-5 wheel loader has a powerful yet fuel-efficient US EPA Tier 4 Interim / EU Stage IIIB-compliant engine. It delivers an impressive digging performance, quick travel speeds and a reduction in fuel consumption of more than 20% compared with the previous model. The new ZW-5 range has also been designed to contribute to better safety levels on the job site, with enhanced all-round visibility from the operator's seat.



The machine in the pictures may include optional items. Please consult your Hitachi dealer for the available optional items.



# The ZW550-5 contributes to a cleaner, safer work environment



## A cleaner environment

The new ZW-5 wheel loader range epitomises our efforts to minimise the impact of construction machinery on the environment in compliance with US EPA Tier 4 Interim / EU Stage IIIB emission regulations.

The ZW-5 has been fitted with a muffler filter to capture air pollutants, which is automatically burnt thanks to an oxidation catalyst and exhaust temperature control. The variable geometry turbocharger – that encourages optimal combustion – and high volume-cooled EGR (Exhaust Gas Recirculation) also help reduce nitrous oxide levels.

All resin parts on the new ZW-5 are suitable for recycling and are clearly marked for ease of separation during recycling. The ECO display indicates ECO drive that results in a fuel-saving performance.

## Lock-up function

Lower levels of fuel consumption have been achieved by the lock-up function on the ZW550-5. The lock-up is activated in second, third and fourth gears, and allows the wheel loader to travel quickly and more efficiently.

## A safer work environment

The operator of the ZW-5 can relax in a safer work environment. The new wheel loader offers excellent visibility from all angles. The view from the cab is enhanced by a windshield without pillars, a large sun visor and additional glass panels in the door.

Looking to the rear of the machine, the counterweight is now visible on both sides, which is particularly useful for working on small job sites. The rear-view monitor allows the operator to see directly behind the machine. The colour display in the front console is easy to view and works automatically when the FNR lever/switch is in reverse position.

## Shift-up delay to third gear

This system delays the timing of the shift-up to the third gear to enhance safer operation of the ZW-5 wheel loader in confined spaces. The wheel loader can perform excavating and unloading tasks more safely in first and second gear.

## Key features

■ Fuel-saving work mode

■ Muffler filter and ECO display

■ Lock-up function

■ Windshield without pillars

■ Large sun visor

■ Both sides of counterweight visible

■ Rear-view monitor

■ Shift-up delay to third gear



# PRODUCTIVITY

Productivity is a key factor in the design of the new ZW-5 wheel loader range because it has a direct impact on the profitability of your business. Hitachi engineers have incorporated the latest hydraulics and gearshift systems into the new ZW550-5 to increase productivity levels in quarries and on large-scale construction projects. They have also made the wheel loader easier to manoeuvre than the previous model, so it is extremely quick and efficient on any job site.





# Designed to improve efficiency on the job site



## Increased efficiency

We have designed the latest range of ZW-5 wheel loaders to offer increased productivity – without burdening the environment – through sustainable operations.

It is equipped with a new hydraulic circuit, which facilitates the combined operation of the bucket and lift arm for loading, and prioritises the use of the bucket for unloading.

The lift arm movement contributes to the new ZW-5's high productivity levels. The flow control lowers the lift arm smoothly, reducing vibrations and operator fatigue.

The height of the lift arm kick-out and lift arm auto leveller are easily adjusted by using the monitor on the front console.

## Enhanced manoeuvrability

The manoeuvrability of the ZW-5 wheel loader series has been enhanced by automatic gearshift controls.

The Auto 1 option automatically shifts between first and fourth gear, depending on the load, when second to fourth gears have been engaged.

The Auto 2 option automatically shifts between second and fourth gear, relative to the load. If required, the operator can also change gears manually by using the Down Shift Switch to suit the terrain on any job site.

The ZW-5 series is equipped with a ride control feature that reduces vibration while the wheel loader is travelling on rough ground. In auto mode, it turns on and off automatically while the wheel loader is in operation.

## Key features

■ Powerful and sustainable

■ Ride control

■ Automatic gearshift

■ New hydraulics circuit

■ Smooth lowering of lift arm

■ Environmentally friendly design

■ Adjustable kick-out height and auto leveler



# MAINTENANCE

A variety of easy maintenance features have been incorporated into the design of the ZW550-5 to ensure high levels of productivity and availability. The redesigned engine and radiator covers opening fully, for example, providing convenient access for inspection. Greasing points, oil levels and fuel filters are all easily accessible. These and other features will enable you to quickly minimise the downtime of your Hitachi wheel loader, so you can be assured of its optimum performance.





# Work for longer with the ZW-5 wheel loader



## Easy access

Hitachi has introduced a range of time-saving features on the new ZW-5 wheel loaders, which are designed to make life easier for you on the job site.

Many of the covers on the machine can be opened fully so you can access maintenance points quickly and easily on a daily basis. Many features – such as the greasing points, oil levels and the fuel filters – are easily accessible.

Using the technology within the multi-function LCD monitor you can set the routine service schedule to help prevent breakdowns each time the ignition switch is turned on.

## Easy cleaning

Quick and easy routine maintenance is essential for you to achieve high levels of productivity on the job site. With convenient features such as the automatic reversible cooling fan, the new Hitachi ZW wheel loaders are capable of working for longer.

The fan allows for easy cleaning of the radiator with its one-minute automatic reverse rotation every 30 operating minutes. In moderate working conditions, this can be manually operated for cleaning as necessary. Dust from the radiator can be easily cleared by swinging the oil cooler open.

## Key features

- Daily checks from ground level
- Automatic reversible cooling fan
- Quick and easy service access



# SUPPORT CHAIN

Once you have taken delivery of your ZW550-5 wheel loader, we want to ensure that it continues to exceed your expectations on the job site. We provide extensive support to each of our Hitachi dealers so that every one of our customers can receive first-class after-sales service. To further protect your investment, you can choose from a variety of options within the Hitachi Support Chain program. Giving you the flexibility to create your own service plan from the following key areas – each one represents a link in the chain of service available from Hitachi via your local dealer.





# Protect your investment with a variety of after-sales options

## Global e-Service

The new ZW-5 wheel loader is equipped with a satellite communication system. This sends a wide range of machine data to the Hitachi main server. Via the Global e-Service database, you will have remote access to all of this data. All you need is an internet connection and your Global e-Service log-in details.

Global e-Service enables you and your dealer to download and share this data, helping you to remotely manage your fleet. The online facility also helps your dealer to proactively advise you on preventive maintenance and related special offers.

The latest information on the ZW-5 wheel loader is available 24/7 and includes operational data, such as the number of working hours, fuel consumption figures, working modes and location. This helps you to reduce running costs, plan jobs efficiently and keep up to date with machine maintenance to ensure optimum performance and minimal downtime.

## Technical support

The professional and highly trained Hitachi service team combines the global expertise and knowledge of Hitachi Construction Machinery with your local language and culture. We take a proactive approach towards customer service by continuously training our dealer personnel, so that the available global knowledge is passed onto each individual technician in our dealer network.

## Extended warranty and service contracts

Every new Hitachi model is covered by a full manufacturer's warranty. However, your ZW-5 wheel loader may require extra protection due to severe working conditions or to minimise equipment repair costs. To meet these demands, our dealers offer the option of a unique extended warranty program (HELP – Hitachi Extended Life Program) and comprehensive service contracts – the most effective way to optimise the performance of your new ZW-5 wheel loader.

## Parts

Hitachi offers different lines of parts and components to suit your specific needs. In addition to our range of genuine parts, the below options are available:

- If your machines have been working for several years, Hitachi can offer a second line of genuine parts as an attractively priced solution.
- For that highly demanding application or climate, Hitachi provides a line of parts with extra performance.

Whatever choice you make, you can be assured by Hitachi's renowned quality and warranty to give you added peace of mind.

Your Hitachi dealer can supply you with more details on each of the above parts lines.



## Key features


- Check each of your machines from your office – 24/7
- Have a remote insight into fuel consumption
- Check the current and previous locations and movements of your machine(s)

- See maintenance status and items due for renewal on each of your machines
- Receive e-mail notifications for any machine alerts, unexpected movements and more

# SPECIFICATIONS

## ENGINE

Model .....	Isuzu 6WG1
Type .....	4-cycle water-cooled, direct injection
Aspiration .....	Turbocharger and intercooled
Aftertreatment .....	Muffler filter
No. of cylinders .....	6
Maximum power	
Gross .....	397 kW (532 HP) at 1 800 min <sup>-1</sup> (rpm)
ISO 9249, net .....	396 kW (531 HP) at 1 800 min <sup>-1</sup> (rpm)
Maximum torque .....	2 250 Nm at 1 500 min <sup>-1</sup> (rpm)
Bore and stroke .....	147 mm X 154 mm
Piston displacement .....	15.68 L
Batteries .....	2 x 12 V
Air cleaner .....	Two element dry type with restriction indicator

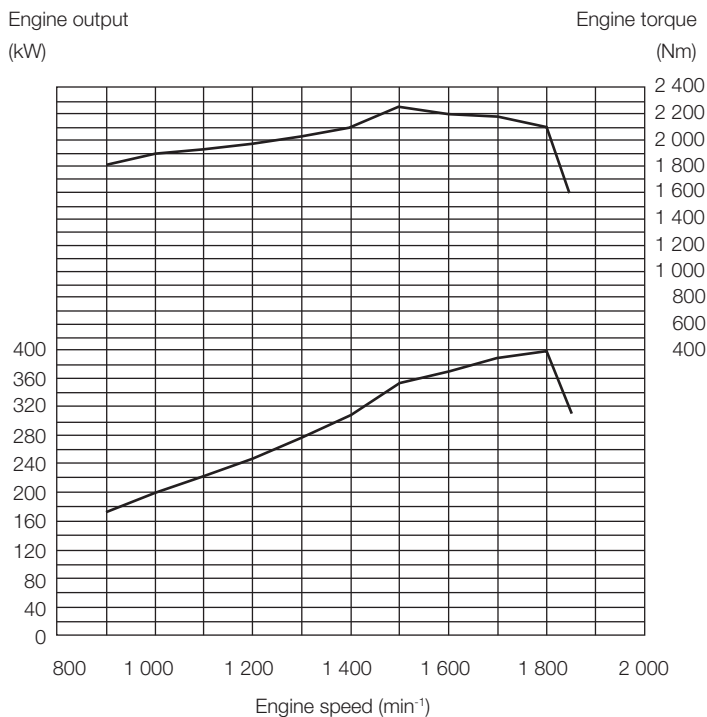

## POWER TRAIN

Transmission .....	Torque converter, planetary gear type powershift with computer-controlled automatic shift and manual shift features included
Torque converter .....	Three element, single stage, single phase with lock-up clutch
Main clutch .....	Wet hydraulic, multi-disc type
Cooling method .....	Forced circulation type
Travel speed* Forward / Reverse	
1st .....	7.1 / 7.8 km/h
2nd .....	12.9 [13.4] / 14.1 km/h
3rd .....	20.8 [22.4] / 22.7 km/h
4th .....	33.6 [35.1] / — km/h
*With 35/65 R33 (L5) tires	
Data at power mode are the same as data at standard mode.	
[ ]: Data at Lock-up clutch ON	

## AXLE AND FINAL DRIVE

Drive system .....	Four-wheel drive system
Front & rear axle .....	Full-floating
Front .....	Fixed to the front frame
Rear .....	Trunnion support
Reduction and differential gear .....	Two stage reduction with conventional type (std) / limited slip differential (optional)
Oscillation angle .....	Total 24° (+12°, -12°)
Final drives .....	Heavy-duty planetary, mounted outboard

## TIRES

Tire size .....	35/65 R33 (L5)
Optional .....	Refer to standard & optional equipment list

## BRAKES

Service brakes .....	Outboard mounted fully hydraulic 4 wheel wet disc brake. Front & rear independent brake circuit
Parking brakes .....	Spring applied, hydraulically released, located in front axle driveline

## STEERING SYSTEM

Type .....	Articulated frame steering
Steering angle .....	Each direction 37° ; total 74°
Cylinders .....	Double-acting piston type
No. x Bore x Stroke .....	2 x 100 mm x 720 mm

## HYDRAULIC SYSTEM



Arm and bucket are controlled by MF lever	
Arm controls .....	Four position valve ; Raise, hold, lower, float
Bucket controls with automatic bucket return-to-dig control .....	Three position valve ; Roll back, hold, dump
Main pump (Serve as steering pump)	
.....	Variable displacement axial plunger pump
Maximum flow .....	380 L/min at 1 800 min <sup>-1</sup> (rpm)
Maximum pressure ...	31.4 MPa
Fan pump	
.....	Variable displacement axial plunger pump
Maximum flow .....	105 L/min at 1 800 min <sup>-1</sup> (rpm)
Maximum pressure ...	26.5 MPa
Hydraulic cylinders	
Type .....	Double acting type
No. x Bore x Stroke ...	Arm : 2 x 190 mm x 1 130 mm
	Bucket : 2 x 160 mm x 767 mm
Filters .....	Full-flow 15 micron return filter in reservoir
Hydraulic cycle times	
Lift arm raise .....	8.9 s
Lift arm lower .....	4.5 s
Bucket dump .....	2.2 s
Total .....	15.6 s
Data at power mode are the same as data at standard mode.	

## SERVICE REFILL CAPACITIES

Fuel tank .....	662 L
Engine coolant .....	85 L
Engine oil .....	57 L
Torque converter & transmission .....	90 L
Front axle differential & wheel hubs .....	180 L
Rear axle differential & wheel hubs .....	180 L
Hydraulic oil tank .....	300 L



## DIMENSIONS & SPECIFICATIONS

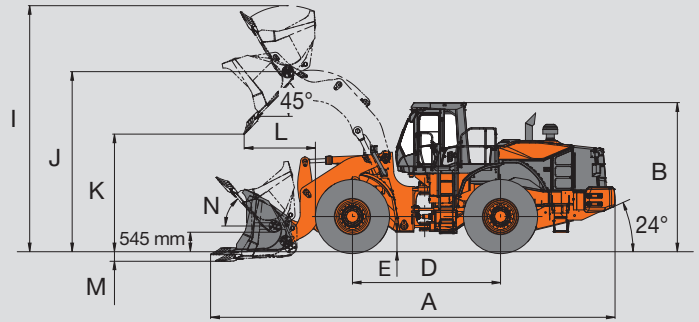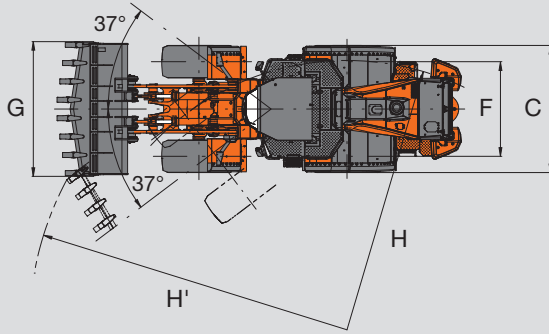


Bucket type			Standard arm		High lift arm
			Rock bucket	General purpose	Rock bucket
			V-edge	Straight edge	V-edge
			Weld-on adaptor & teeth / segment edge	Bolt-on cutting edge	Weld-on adaptor & teeth
Bucket capacity	ISO heaped	m <sup>3</sup>	6.2	6.8	5.0
	ISO struck	m <sup>3</sup>	5.5	5.9	4.3
A Overall length		mm	11 290	10 920	11 670
B Overall height		mm		4 260	
C Width over tires		mm		3 570	
D Wheel base		mm		4 150	
E Ground clearance		mm		540	
F Tread		mm		2 650	
G Bucket width		mm		3 770	
H Turning radius (centerline of outside tire)		mm		7 540	
H' Loader clearance radius, bucket in carry position		mm	8 870	8 850	9 030
I Overall operating height		mm	6 910	6 940	7 370
J Height to bucket hinge pin, fully raised		mm	5 070		5 510
K Dumping clearance 45 degree, full height		mm	3 320	3 620	3 830
L Reach, 45 degree dump, full height		mm	1 970	1 750	2 000
M Digging depth (horizontal digging angle)		mm	159	113	165
N Max. roll back at carry position		deg		50	
Static tipping load *	Straight	kg	33 340	33 960	28 470
	Full 37 degree turn	kg	28 210	28 740	24 090
Breakout force		kgf	40 300	41 600	41 000
		kN	395	408	402
Operating weight *		kg	47 960	47 210	48 020

Note: All dimensions, weight and performance data based on ISO 6746-1:1987, ISO 7137:2009 and ISO 7546:1983

\*: Static tipping load and operating weight marked with\* include 35/65 R33 (L5) tires (No ballast) with lubricants, full fuel tank and operator.

Machine stability and operating weight depend on counterweight, tire size and other attachments.

## BUCKET SELECTION GUIDE

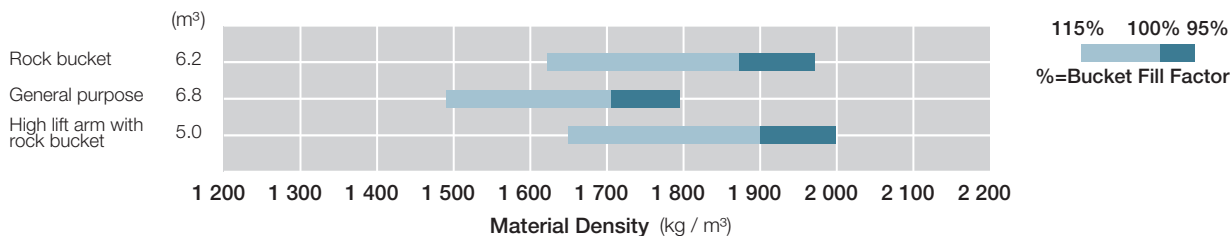

# EQUIPMENT

● ..... Standard equipment

○ ..... Optional equipment

## OPERATOR'S STATION

Adjustable steering column with POP-UP	●
Air suspension seat with headrest and heater: fabric, high back, adjustable for damper, inclination of the seat, seat depth, weight-height, fore-aft position, reclining angle, armrest angle, headrest height and angle, lumbar support	●
AM/FM radio with AUX for digital audio player	●
Ashtray, cigar lighter	●
Auto control air conditioner with double intake filter	●
ROPS (ISO3471), FOPS Level II (ISO3449) compliant cab: multi-plane isolation mounted for noise, vibration reduction	●
Coat hook	●
Front/Rear defroster	●
Rear view camera & monitor	●
Rear view mirrors	
Inside (2)	●
Outside (2)	●
Outside (Heated, 2)	○
Retractable seat belt, 50 mm	●
Retractable seat belt, 75 mm	○
Rubber floor mat	●
Steering system	
Steering wheel	●
Lever steering	●
Joy stick steering is standard for Australia and available as option for New Zealand.	
Storage	
Cup holder	●
Digital audio player holder	●
Document holder	●
Glove compartment	●
Hot & cool box	●
Seatback pocket	●
Sun visor	●
Textured steering wheel with spinner knob	●
Tinted safety glass: front windshield: laminated, others: tempered	●
Windshield washers for front and rear	●
Windshield wipers for front and rear	●

## ELECTRICAL SYSTEM

Backup alarm	●
Batteries	●
Battery disconnect switch	●
12 V power outlet	●

## COOLING SYSTEM

Automatic reversible cooling fan with heat sensing	●
Fan guard	●
Standard fin pitch radiator	●

## LIGHTS

Bracket and switch for rotating beacon	●
Brake & tail lights	●
Clearance lights	●
Headlights	●
Rotating beacon	●
Turn signals with hazard switch	●
Work lights	
Additional front lights on cab (2)	●
Front lights on cab (2)	●
Rear lights on cab (2)	●
Rear lights on rear grille side cover (2)	●

## POWER TRAIN

Automatic transmission with load sensing system	●
Axle oil cooler	●
Clutch cut position switch	●
Differential	
Conventional type	●
LSD (Limited Slip Differential, front and rear)	○
DSS (Down Shift Switch)	●
Forward/Reverse lever	●
Forward/Reverse selector switch	●
Lock-up clutch (torque converter)	●
Power mode switch	●
Quick power switch	●
Traction control system	●
Travel mode selector (Auto1-Auto2)	●

## ENGINE

Air filter double elements	●
Engine oil filter	●
Engine oil remote drain	●
Fuel main filter	●
Fuel pre-filter	●
Pre-cleaner (Sy-Klone)	●

## MONITORING SYSTEM

Gauge: coolant temperature, fuel	●
Indicator lights: clearance lights, control lever lock, fuel level, high beam, parking brake, preheat, turn signals, work lights	●
Indicator on multifunction monitor: air conditioner display, auto brake indicator, brake oil pressure gauge, clock, clutch cut off indicator, dual lift arm auto leveler, ECO indicator, fan reverse indicator, F-N-R/Shift position, forward/reverse selector switch indicator, hold display, hour meter, lock-up indicator, muffler filter, odometer, power mode indicator, ride control indicator, seat belt indicator, speedometer, tachometer, traction control indicator, transmission auto-shifting indicator, transmission oil temperature	●
Warning lights: air filter restriction, auto brake warning, brake oil low pressure, communication system error, discharge warning, engine oil low pressure, engine warning, hydraulic oil level, low steering oil pressure, overheat, transmission warning,	●

## BRAKE SYSTEM

Front & rear independent brake circuit	●
Outboard mounted fully hydraulic 4 wheel wet disc	●
Spring-set/Hydraulic-released parking brake	●




## HYDRAULIC SYSTEM

Bucket auto leveler (Automatic return to dig control) ●

Control lever

for 2 spools control valve

2 levers



○


Multifunction lever (MF lever)



●

for 3 spools control valve

2 levers & AUX lever for 3rd function  
- Outside layout pattern  
(Bucket - lift arm - 3rd)



○

MF lever & AUX lever for 3rd function



○

Control lever lock switch

●

Dual lift arm auto leveler

●

Hydraulic filters

●

Lift arm float system

●

Reservoir sight gauge

●

Ride control system (OFF-AUTO type)

●

## MISCELLANEOUS

Articulation lock bar

●

Belly guard (Bolt on type, front & rear)

●

Bucket cylinder guard

●

Counterweight, built-in

●

Drawbar with locking pin

●

Emergency steering

●

Fenders (Front & full covered rear fenders with mud flaps)

●

Global e-Service

●

Lift arm

Standard lift arm

●

High lift arm

○

Lift & tie down hooks

●

Pilfer proof

Battery cover with locking bracket

●

Lockable engine cover

●

Lockable fuel refilling cap

●

## TIRES

35/65 R33 (L5)

●



**Built on the foundation of superb technological capabilities, Hitachi Construction Machinery is committed to providing leading-edge solutions and services which contribute to the businesses of our customers worldwide.**

---

## Hitachi Environmental Vision 2050

---

Our Environmental Vision envisions a low-carbon society; a resource efficient society; a harmonized society with nature. To achieve such a sustainable society, we have established a set of long-term environmental targets called Hitachi Environmental Innovation 2050.

### Reducing Environmental Impact by the New ZWs

Hitachi reduces carbon emissions for global warming prevention according to LCA\*. The new ZWs exemplify the Group's commitment to the environment through features, such as the new standard mode which optimises fuel efficiency. Hitachi has long been committed to the recycling of components, such as aluminium parts in radiators and oil coolers. Resin parts are marked for recycling.

\*Life Cycle Assessment – ISO 14040

Prior to operating this machine, including the satellite communication system, in a country other than the country of its intended use, it may be necessary to make modifications to the machine to ensure it complies with the local regulatory standards (including safety standards) and legal requirements of that particular country. Please do not export or operate this machine outside the country of its intended use until such compliance has been confirmed. Please contact your Hitachi dealer regarding compliance. These specifications are subject to change without notice.

Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, customer installed and modified parts, optional parts and all standard equipment with some differences in colour and features. Before use, read and understand the Operator's Manual for proper operation.