

ST


MODELS ST 180 > ST 225 > ST 285 > ST 310

High precision flatbed CNC lathes.

The ST is Pinacho's most sophisticated numerical control lathe, with great rigidity and working precision. Developed with components of the highest quality and manufactured under strict and demanding control standards. ST parallel lathes incorporate the most advanced technology developed from experience provided by more than 70 years of history.

Our CNC flatbed lathes are silent, easy to use machines, with a headstock composed of a servo-motor and direct transmission to the main axis, providing a high speed of rotation and an excellent quality surface finish on the component.

The Pinacho ST are lathes with up to 3 axes that provide an extraordinary versatility in the world of machine tools.

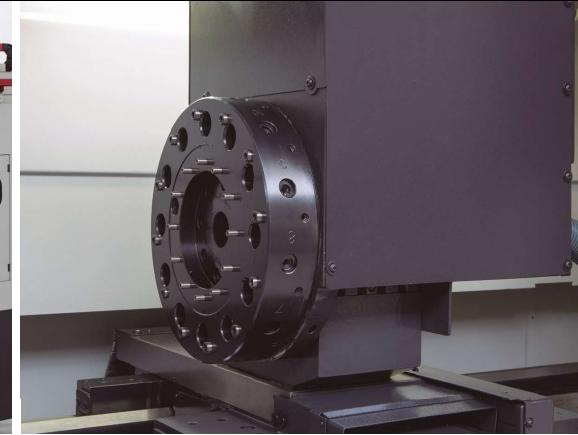

STANDARD EQUIPMENT

- Fanuc Oi-TF Control
- Dynamic graphics / trajectory
- Profile Editor
- Electronic handwheel for X and Z axes
- Direct drive headstock with servomotor
- Reducing bush of main shaft and dead centers
- 8-position automatic turret with 4 toolholders
- Automatic lubrication of the guideways
- Refrigeration equipment
- Cast iron pedestals
- Precision Levellers
- Work light
- Instruction manual
- Verification standard DIN 8605
- CE Standard

OPTIONAL EXTRAS


- Control Fagor 8055T, Siemens 828D
- Chucks with 3 and 4 jaws
- Rear chuck
- Hydraulic power chuck
- Hydraulic collect chuck
- Hydraulic tailstock
- Fixed Steady Rest
- Large capacity fixed steady rest
- Follow Rest
- Livetool 12 positions
- Live center
- Chip conveyor
- Electric transformer
- Higher pressure cooling system
- Electric panel refrigeration
- Anti-vibration kit
- Remote jog unit
- Tool Presetter
- Bar feeder




TECHNICAL DATA SHEET TORQUE AND POWER CURVES

Working capacity		ST-180		ST-225		ST-285		ST-310						
Center distance	mm/in	750/30	1000/40	1000/40	1500/60	1000/40	1500/60	2000/80	3000/120	1000/40	1500/60	2000/80	3000/120	
Bed width	mm/in	250 / 10		300 / 12		350 / 14		350 / 14		350 / 14		350 / 14		
Centre height	mm/in	180 / 7		225 / 9		285 / 11		310 / 12		310 / 12		310 / 12		
Ø max. swing over bed	mm/in	360 / 14		450 / 18		570 / 22 1/2		620 / 24		620 / 24		620 / 24		
Ø max. swing over carriage	mm/in	300 / 12		370 / 15		510 / 20		550 / 21 1/2		550 / 21 1/2		550 / 21 1/2		
Ø max. over cross slide	mm/in	190 / 7		260 / 10		360 / 14		410 / 16		410 / 16		410 / 16		
Cross slide travel	mm/in	185 / 7 1/4		235 / 9 1/4		260 / 10		310 / 12		310 / 12		310 / 12		
Longitudinal carriage travel	mm/in	600/23 1/2	840/33	930/36 1/2	1450/57	850/33	1450/53	1850/72 1/2	2850/112	850/33	1450/53	1850/72 1/2	2850/112	
Headstock														
Main motor power	Fagor	kW	7.5		15		17		17		17		17	
	Fanuc	kW	11		15		15		15		15		15	
	Siemens	kW	7		9		11		11		11		11	
Headstock main spindle bore <small>Valid for all centre distances</small>	mm/in	42 / 1 1/2		65 / 2 1/2		80 / 3		105 / 4		155 / 6		155 / 6		
Main spindle nose	ASA / CAM-LOCK	A2 - 5 / D1 - 5		A2 - 6 / D1 - 6		A2 - 8 / D1 - 8		A2 - 8 / D1 - 8		A2 - 11 / --		A2 - 11 / --		
Main spindle nose taper	MT	4		4		5		5		5		5		
Speed ranges	r.p.m.	0-4000		0-3000		0-2500		0-2500		0-1000		0-1000		
X-axis, Z-axis														
Working feeds Z	Fagor	m/min	0 - 10		0 - 10		0 - 10		0 - 10		0 - 10		0 - 10	
	Fanuc	m/min	0 - 10		0 - 10		0 - 10		0 - 10		0 - 10		0 - 10	
	Siemens	m/min	0 - 7		0 - 7		0 - 7		0 - 7		0 - 7		0 - 7	
Working feeds X	Fagor	m/min	0 - 12		0 - 12		0 - 12		0 - 12		0 - 12		0 - 12	
	Fanuc	m/min	0 - 12		0 - 12		0 - 12		0 - 12		0 - 12		0 - 12	
	Siemens	m/min	0 - 12		0 - 12		0 - 12		0 - 12		0 - 12		0 - 12	
Rapid traverse Z	Fagor	m/min	12.5		12.5		12.5		12.5		12.5		12.5	
	Fanuc	m/min	12.5		12.5		12.5		12.5		12.5		12.5	
	Siemens	m/min	9		9		9		9		9		9	
Rapid traverse X	Fagor	m/min	15		15		15		15		15		15	
	Fanuc	m/min	15		15		15		15		15		15	
	Siemens	m/min	15		15		15		15		15		15	
Z - Ball screw, Ø/pitch	mm					40 / 10		40 / 10		40 / 10		40 / 10		
X - Ball screw, Ø/pitch	mm					20 / 5		20 / 5		20 / 5		20 / 5		
Tailstock														
Tailstock barrel Ø	mm/in	58 / 2 1/4		68 / 2 1/2		95 / 3 3/4		95 / 3 3/4		95 / 3 3/4		95 / 3 3/4		
Tailstock barrel travel	mm/in	180 / 7		200 / 7 3/4		220 / 8 1/2		220 / 8 1/2		220 / 8 1/2		220 / 8 1/2		
Tailstock Morse taper	MT	4		4		5		5		5		5		
Turret														
Stations of standard turret		8		8		8		8		8		8		
Tool shank	mm	20x20		20x20		25x25		25x25		25x25		25x25		
Ø Boring bar	mm	32		32		40		40		40		40		
Dimensions and Weight														
Length	mm	2250	2520	2810	3325	2810	3320	3940	4750	2810	3325	3940	4750	
Width	mm	1170		1270		1370		1450		1450		1700		
Height	mm	1820		1890		1930		2110		1930		2110		
Weight	kg	1200	1490	2230	2340	2250	2475	2970	3640	2300	2515	3010	3700	
Options														
Fixed steady rest Ø	mm	10 - 125		10 - 140		10 - 180		10 - 180		10 - 180		10 - 180		
Large capacity fixed steady rest Ø	mm	110 - 200		140 - 250		180 - 350		180 - 350		180 - 400		180 - 400		
Follow rest Ø	mm	10 - 80		10 - 90		10 - 130		10 - 130		10 - 130		10 - 130		
Dimensions and weight with packaging														
Length	mm	2450	2720	3010	3525	3010	3520	4140	4950	3010	3525	4140	4950	
Width	mm	1270		1370		1470		1550		1550		1800		
Height	mm	2020		2090		2130		2310		2130		2310		
Weight	kg	1500	1790	2530	2640	2650	2875	3370	3940	2700	2915	3410	4100	


ST-180/42 > FANUC

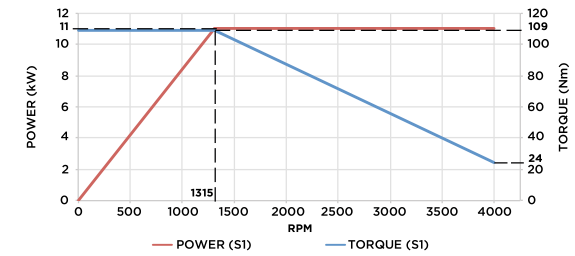

ST-225/65 > FANUC

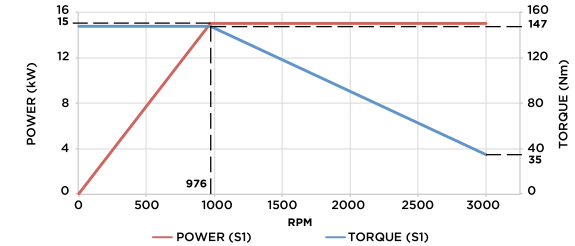

ST-285/80 > FANUC

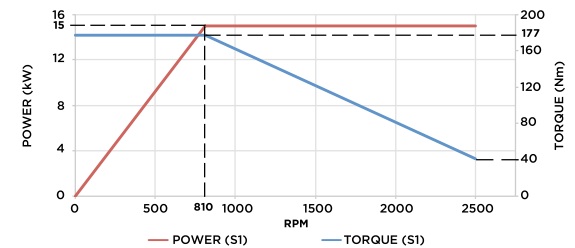

ST-310/105 > FANUC

