




# A750 / Leading the way

The simple and elegant design concept has created the low-key luxury BP750. Advanced in the industry, the professional extended to the extreme, and the wisdom is embedded in the machine.

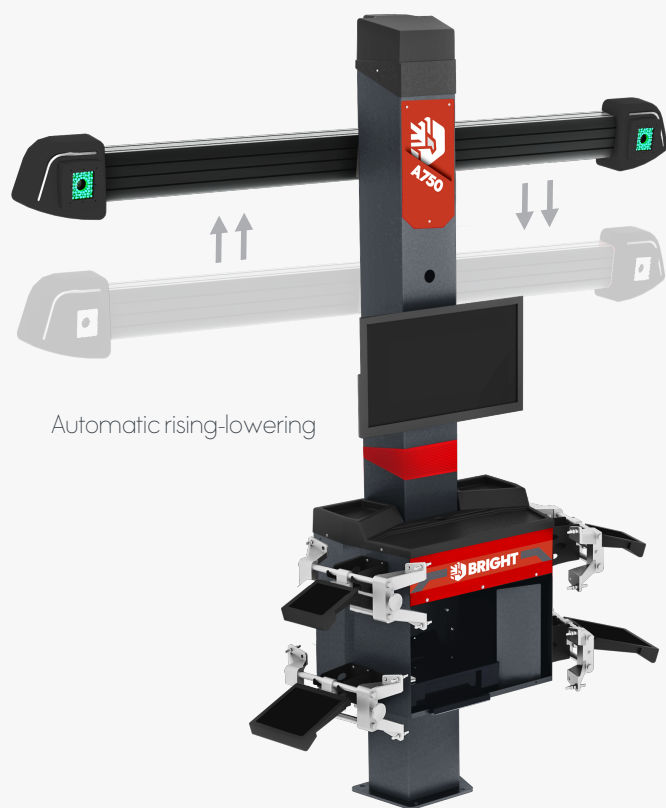

Automatic rising-lowering

## High security

Genuine WINIO authorization data is stable and not lost.



## High precision

5 million hd cameras increased measurement accuracy and data stability.



## Filter light

New target with differential measurement for enhanced sunbeam reflections rejection



## Easy to use

The target board is hung on both sides of the box for easy operation and use



## Intelligentize

External clamping tire fixing method to protect the car from injury (Operation)



## Technical data

Front axle	ACCURACY	MEASURING RANGE	TOTAL MEASURING RANGE
Total toe	± 3'	± 4°	± 48°
Total toe	± 6'	± 4 ÷ 48 °	± 48°
Partial toe	± 1.5'	± 2°	± 24°
Partial toe	± 3'	± 4 ÷ ±24 °	± 24°
Set -back	± 5'	± 3°	± 3°
Camber	± 5'	± 3°	± 10°
Camber	± 7'	± 3 ÷ ±10 °	± 10°
Caster	± 10'	± 24°	± 24°
King -pin	± 10'	± 24°	± 24°
Rear axle			
Total toe	± 3'	± 4°	± 48°
Total toe	± 6'	± 4 ÷ 48°	± 48°
Partial toe	± 1.5'	± 2°	± 24°
Partial toe	± 3'	± 4 ÷ ±24°	± 24°
Set -back	± 5'	± 3°	± 3°
Camber	± 5'	± 3°	± 10°
Camber	± 7'	± 3 ÷ ±10°	± 10°
Thrust angle	± 2'	± 3°	± 24°

STANDARD / OPERATION / BRAND SERVED

4-900208



TURN TABLE

4-900449



TRANSITION BLOCK

4-115978



BRAKE SUPPORT

5-900005



STEERING WHEEL LOCK

5-900006



BRAKE DEPRESSOR

5-9K00014



THREE CLAW CLAMP

8-34900026



CALIBRATION FRAME

4-900897-00



MOVABLE BASE

