

LIFEGUARD PSOA

The LIFEGUARD 4 and 6 are single phase **P**ortable **S**ocket **O**utlet **A**ssemblies, available with either 10A or 15A sockets.


The LIFEGUARD 4 and 6 meet the requirements of AS/NZS 3012, and have been issued with Certificate of Approval number V05583. (Residual Current Device - Portable Type)

The LIFEGUARD 4 and 6 are suitable for use on Building Sites. They have the specifications Tradesmen and OHS demand.


Can be built to meet the end users specific requirements.

SPECIFICATIONS

SUPPLY INPUT POWER:	10A or 15A, 1 phase + N + E
FREQUENCY:	50-60Hz
RCD:	2 pole, 30mA, 230VAC 10KA rating
SOCKET OUTLETS:	4 or 6 x Double pole, Self Switching socket outlets
IP RATING:	66
MATERIALS:	High impact polyethylene
WEIGHT:	2kg approximately
CABLE LENGTH:	1.8m

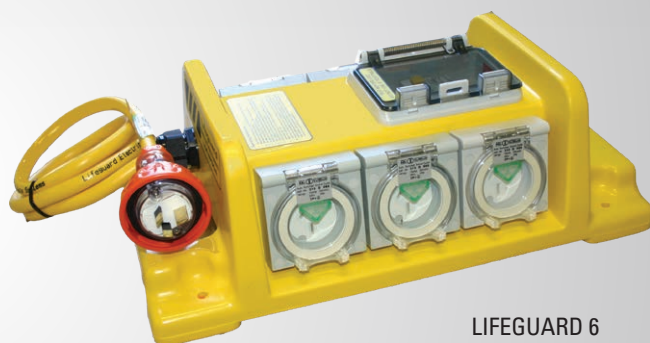

LIFEGUARD 6

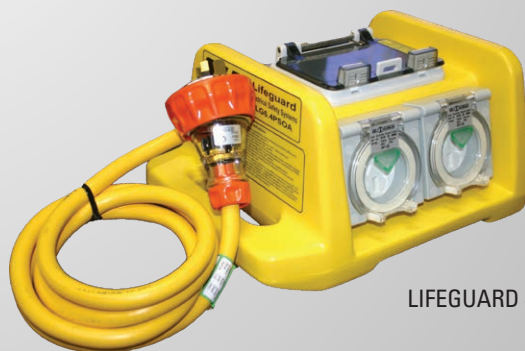

LIFEGUARD 4