

specifications

RF7.UBR.4.GD

INDUSTRY KITCHENS

www.industrykitchens.com.au 1800 611 058


SKOPE®

Refrigeration

ReFlex Series, 4 Glass Door Underbench Fridge

Project: _____

Item No: _____

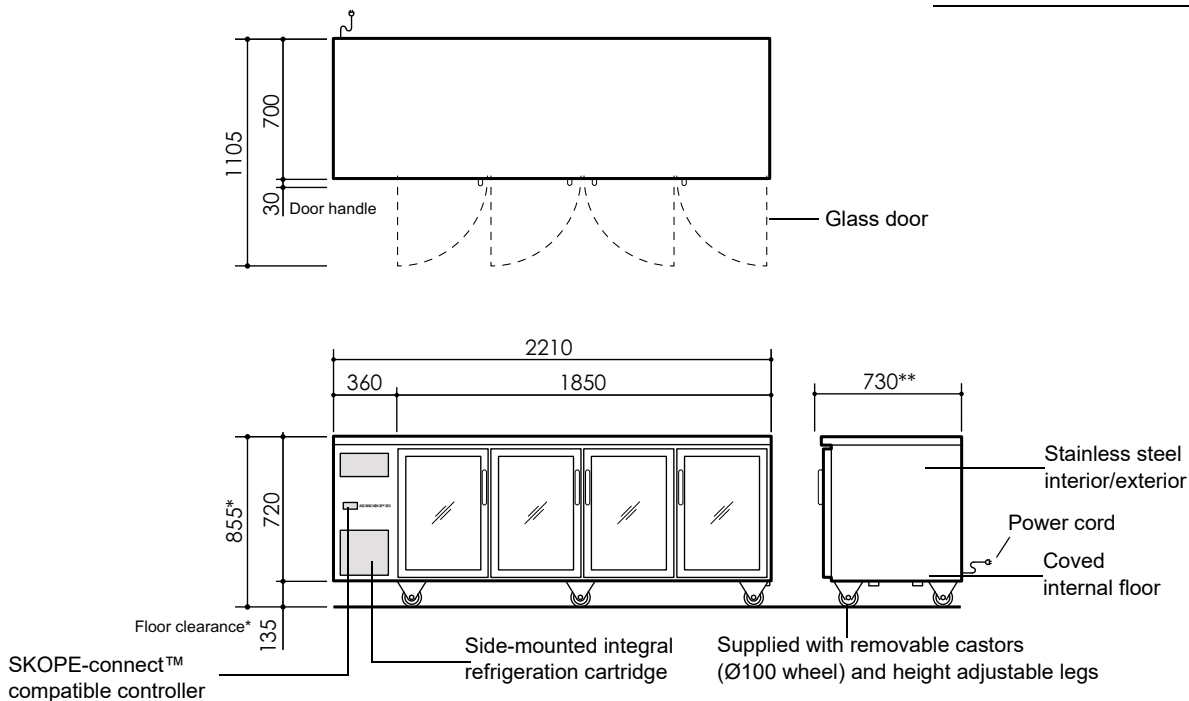

CABINET	
Doors	4 × self-closing, lockable, double-glazed, double low-e, glass swing doors
Internal door opening	4 × door openings: 560 mm high × 360 mm wide
Shelves	8 × adjustable height shelves. <ul style="list-style-type: none"> • 4 × middle shelves: 455 mm × 510 mm deep. • 4 × outer shelves: 395 mm wide × 510 mm deep.
Worktop	Note: Bottom shelves supplied floor mounted. Additional shelf clips are available on request. Total thickness 45 mm (0.7 mm 304 AISI stainless steel over insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior

PERFORMANCE	
Max. ambient temperature	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect™ -2°C to 15°C)
GEMS class	4M1
GEMS energy consumption	4.47 kWh/24 h
GEMS annual running cost	\$490 p.a. (@ \$0.30/kWh)

ELECTRICAL	
Electrical safety climate class	5
Interior lighting	3 × 400 mm, 4W LED lights
Power cord	Supplied with a 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	2.0 amps (includes cartridge 1.5 amps)

REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side-mounted, integral, removable refrigeration cartridge (part number ULKCNI-0028)
Refrigerant	R290/95 g (natural refrigerant)
Nominal capacity	650 watts
Heat rejection (avg./peak)	160 watts/185 watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	855 mm*	570 mm
Width	2210 mm	1740 mm
Depth	730 mm**	530 mm
Floor area	1.61 m ²	
Weight	167 kg	
Gross volume	526 L	
Net volume	436 L	

* With supplied castors fitted. See height variation below.

** Includes 30 mm door handle.

Height variation	
Supplied castors	855 mm
Supplied height adjustable legs	865 mm -905 mm
No castors or legs	720 mm

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5 mm		
More than 1 metre	-5 mm to +10 mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5 mm	+15 mm	
More than 1 metre	-5 mm to +10 mm	+15 mm	

Ventilation requirements	
Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2022 SKOPE Industries Limited

PSS1087 Rev. 1.1 Jul. 2022

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

