




X5C - Combination System

Designed for Food & Packaging Industries


The X5C X-Ray & CW3 Checkweighing combination system is designed for detecting contaminants and reducing giveaway in food products. This system is perfect for inspecting retail-packed convenience food, ready meals in foil trays and small end-of-line packaged goods up to 280mm wide by 80mm high.

Product Highlights

- Detects metals, bone, glass and dense plastic contaminants with automatic rejection of contaminated products
- Weighing using a CW3 dynamic checkweigher, including approvals to OIML R51 and MID (EC TAC)
- Combination system eases acquisition, installation and support of a robust CCP designed to improve quality of production output simplifying the process
- Linked multilingual colour touchscreens complete with icon-driven menus for straight forward operation and integrated machine communication for safe product transfer
- Extensive data logging and reporting via USB or Ethernet for HACCP and retail compliance
- Multilevel password protection provides secure access and are logged against events for traceability (CFR21 part11)

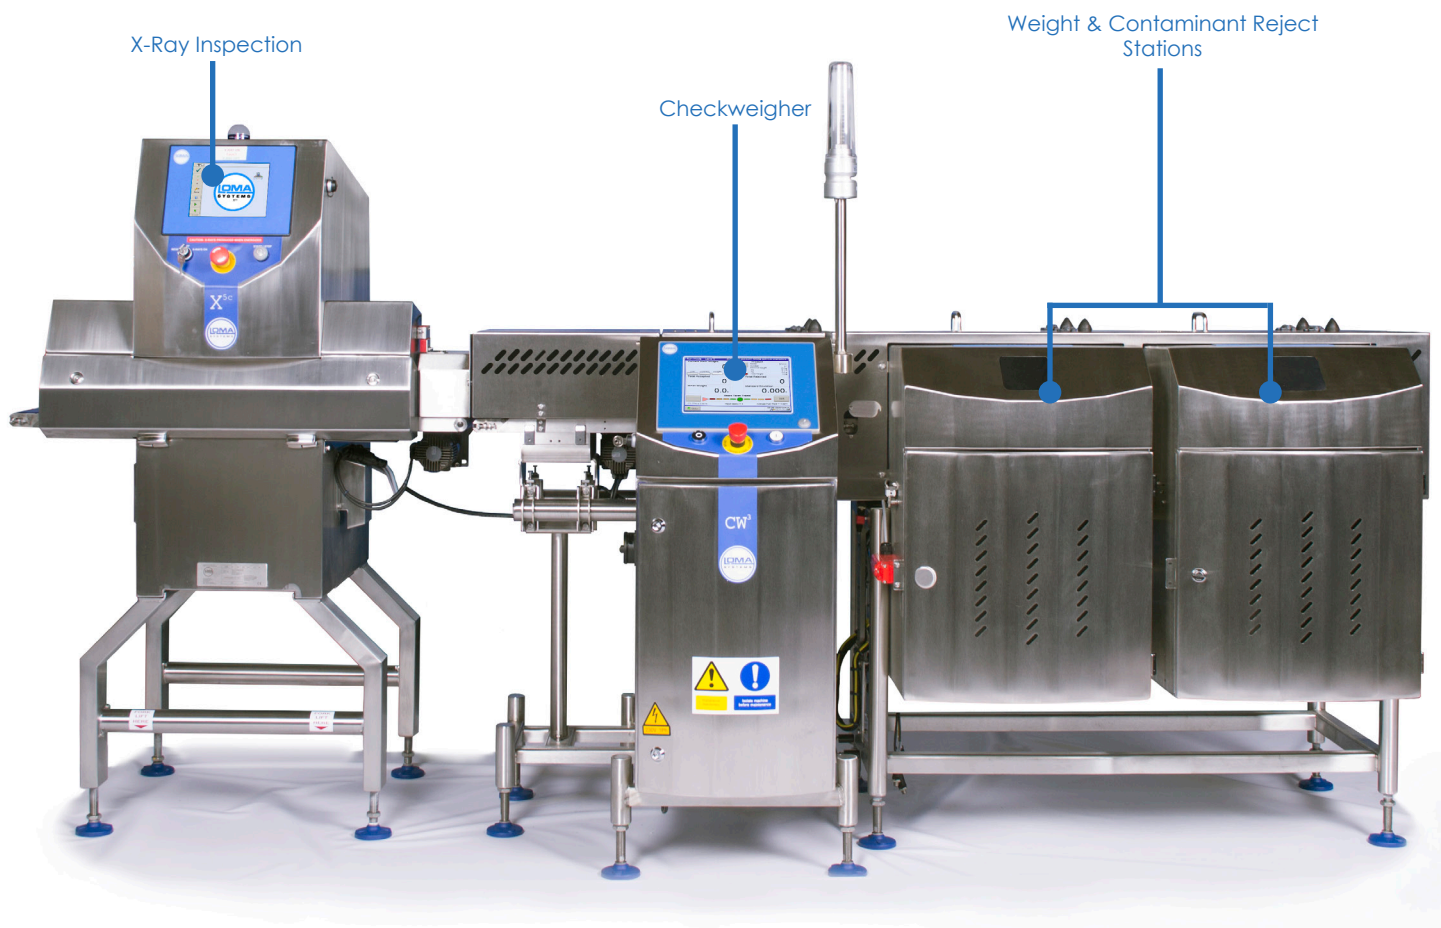

Technical Specification

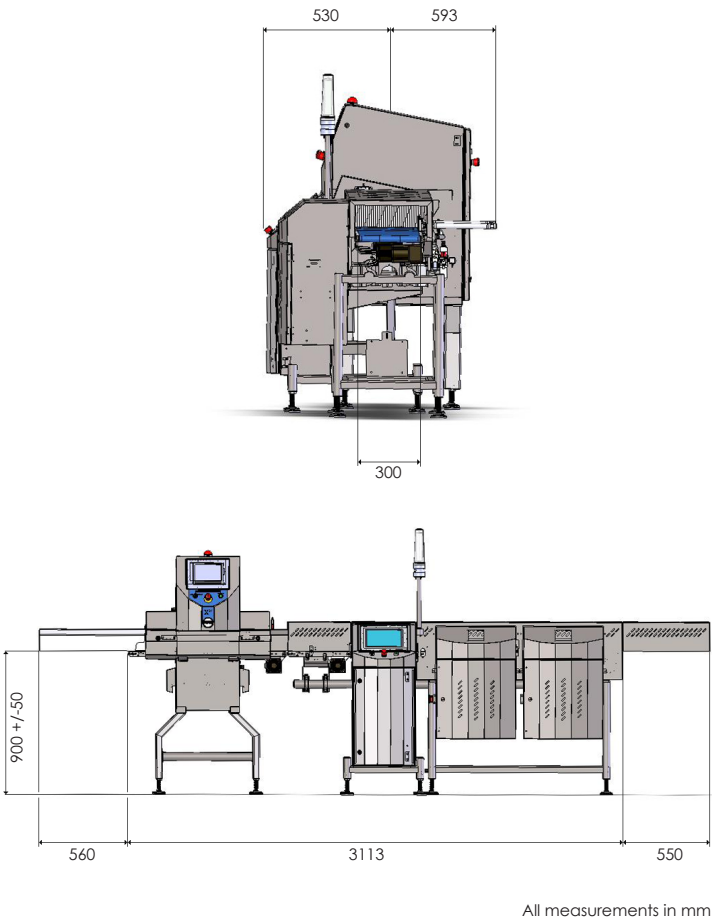


Finish	304 stainless steel
Line Length (mm)	3113
Line Height Option (mm)	750 800 850 900 950 1000 ± 50
Product Height (recommended maximum)	110 mm
Product Width (recommended maximum)	280 mm
Product Length (recommended maximum)	280 mm
X-Ray Output	80W (40 kV 2 mA)
IP Rating	IP66
Belt Type	PU Anti-Static
Speed Range (m/min)	10 - 50
Power Requirements	2 x 220-230 V, 50Hz or 110-120 V, 60Hz, Single Phase Mains
Air Supply	5 to 8 Bar (10mm Outside Dia) 72-116 PSI
Cooling	Vortex
Operating Environment	2 to 10 °C with cabinet warm up 10 to 35 °C with Vortex
X-Ray Safety	Leakage less than 1 µSv/h
Detection Algorithms	2 x contaminant 3 x object checking 2 x image optimisation
Reporting	Event, Batch and Shift
Data Retrieval	via USB
Weight Range (g) MID/R51 Approved	50 - 1500*
Weight Range (g) Non - Approved	10 - 1500*
Typical Accuracy (g)	0.18*

*Higher weight capacity available dependent on pack weight.

Automatic Reject Options

This combination system is supplied as standard with two automatic reject stations with the following options:

- Pusher
- Air-blast, single nozzle
- Air-blast, dual nozzle

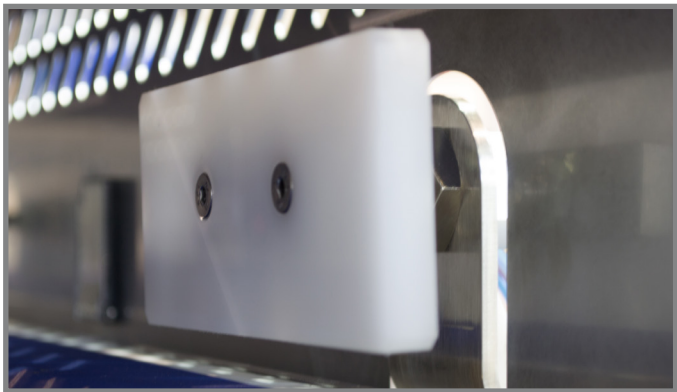

An ITW Company

www.loma.com
Tel: +44(0)1252 893300 (UK) | +1-800-872-LOMA (North America)
Metal Detection | Checkweighing | X-Ray Inspection

Loma Systems is a registered trademark of Illinois Tool Works Inc. (ITW). Other names, logos, icons and marks identifying our products and services referenced herein are trademarks of ITW and may not be used without the prior written permission of ITW. Other product and company names listed are trademarks or trade names of their respective companies. Copyright © 2016 Illinois Tool Works Inc. All rights reserved. All of the specifications shown in this document are subject to change without notice.

In association with

