

The KRGS Counterline Aluminium shutter has a slimline 44mm, flat slat curtain, manufactured from aluminum extrusion to provide quality, strength with ease of use and aesthetic appeal.

Suitable applications include shopping centres, shop fronts, club and hotel bars, counter tops, kiosks, arcades, serveries, sporting clubs and stadiums, airports, fire reel cupboards, schools and doorways.

The KRGS Counterline Shutter can be slotted to provide ventilation where necessary or remain solid to keep out vermin and debris.

The KRGS Counterline Shutter can be supplied in a vast arrange of sizes and colour finishes to suit all decors.

APPLICATIONS

- Ideal for shopping centres, shop fronts, club and hotel bars, counter tops, kiosks, arcades, serveries, sporting clubs and stadiums, airports, fire reel cupboards, schools and doorways.
- Suitable for openings up to 9 square metres
- High level of security

ARCHITECTURAL SPECIFICATION

Supply and install Counterline Shutter manufactured by KRGS Roller Grilles and Shutters 1800 897 822.

COUNTERLINE **SHUTTER**



KRGS Counterline Shutters are ideal for small openings.

SPECIFICATIONS The Counterline shutters can be manufactured up to a width of 3.0m or a total of 9 square metres. Larger openings can be fitted with multiple doors with a combination of standard or corner mullions.

CURTAIN The curtain is constructed using interlocked 42mm x 1.5mm extruded aluminium slats; the design of the slat produces a flat front surface ideal for counter shutter application. The ends of these aluminium sections are fitted with a nylon end clip to ensure quiet and smooth operation


BOTTOM RAIL The bottom rail is manufactured from an extruded aluminium section 70mm in height and 15mm in width. The locking mechanism for the shutter is concealed in this rail and can be key-operated from both sides.

LOCKING is a two way key mortice lock mounted in the centre of the bottom rail, that slides a steel shoot bolt out into the side guides. Standard locking position allows for inside-outside locking. Multiple doors can also be keyed alike.

SIDE GUIDES are 37mm deep by 29mm wide extruded aluminium suitable for face fit or through the mouth of the guide if fitted between walls.

DIMENSIONS

	DRUM 150MM		DRUM 229MM	
DOOR HEIGHT	ROLL DIAMETER	CENTRE AXLE FROM WALL	ROLL DIAMETER	CENTRE AXLE FROM WALL
900	200	110	270	145
1200	215	117	280	150
1500	230	125	290	155
1800	250	135	290	155
2100	260	140	310	165
2400	260	140	320	170
2700	275	147	340	180
3000	290	155	340	180




MULLIONS The standard 180 degree mullion is manufactured from an extruded aluminium section 112mm wide x 29mm; a steel shoot bolt secures the mullion into the floor or counter top. Special mullions are also available to suit a variety of degrees and applications.

BRACKETS are manufactured from slotted 90mm x 40mm mild galvanized steel.

DRUM The drum is manufactured using a 150mm diameter tube if manual or if motorised it is a 229mm diameter tube with an internal spring designed to counterbalance the operation of the shutter.

OPERATION Manual operation, push-up and pull-down with supplied pull stick. Shutters can be electrically motorised with key switch or remote control operation as an optional extra. Optional Battery Backup System available.

FINISH Clear anodised is the standard, whilst Dulux powder coat range is available as an optional extra.

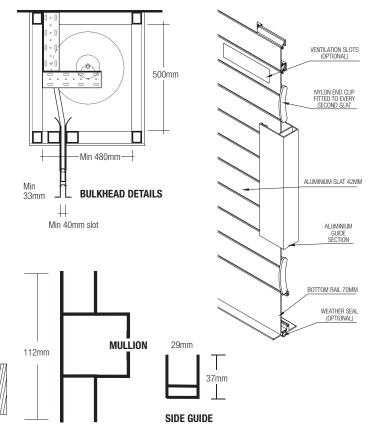



WARRANTY A 12 month warranty against defective materials and workmanship applies. NOTE KRGS ROLLER GRILLES AND SHUTTERS HAS A CONTINUOUS PROGRAM OF DEVELOPMENT SIZES OR CONFIGURATION OF PRODUCT MAY CHANGE AT ANY TIME. FOR THE LATEST IN DESIGN AND SPECIFICATION PLEASE CONSULT WITH KRGS BY CALLING US.

A DOOR DESIGN WITH YOU IN MIND

