



Metro Curve

Street Light



EarthLight  TM
TRADE

Industrial & Commercial Lighting
earthlight.com.au

Metro Curve

Street Light

The Metro Curve Series Street Light offers incorporates a sleek, modern design with cost effective, intelligent LED lighting solution. The Metro Curve features an adjustable knuckle bracket, anti-corrosion properties, and an IP66 waterproof cover.

With an optional DALI or 0-10V dimming control, daylight sensor, and smart control NEMA 7pin Socket, the Metro Curve Street Light is an energy efficient and sustainable lighting solution.

An ideal solar street light option for streets, car parks, public area, and industrial sites.

- ✓ Sleek and Smooth Design Diminishes Dust Accumulation
- ✓ Adjustable Knuckle Bracket Included
- ✓ Water Proof Cover and Anti-Corrosion Material
- ✓ Intelligent Dali, 0-10v Dimming Controls
- ✓ Timer Compatible for Greater Energy Savings
- ✓ Smart City Enabled Nema Socket Options
- ✓ Tool-Free Replacement, Quick and Easy Maintenance



**Easy Access for
Maintenance**



earthlight.com.au
1300 410 485
sales@earthlight.com.au

Metro Curve

Specifications

CODE	ETG-06MC001	ETG-06MC002	ETG-06MC003	ETG-21MD204	ETG-06MC006
Power (Wattage)	30	50	70	100	150
Lumens (lm)	4,200	7,000	9,800	16,000	19,500
Weight (kg)	5.9±0.3	5.9±0.3	5.9±0.3	4.5±0.3	8.1±0.3KG
Dimensions (mm)	649 × 272 × 179 mm	649 × 272 × 179 mm	649 × 272 × 179 mm	762 × 336 × 179 mm	762 × 336 × 179 mm

CODE	ETG-06MC007	ETG-06MC008	ETG-06MC054 - PE CELL	ETG-06MC057 - PE CELL	ETG-06MC058 - PE CELL
Power (Wattage)	180	240	90W	180W	240W
Lumens (lm)	25,200	34,800	12,600	25,200	33,600
Weight (kg)	10.0±0.3	10.0±0.3	8.2	10	10
Dimensions (mm)	889 × 378 × 192 mm	889 × 378 × 192 mm	762 × 336 × 179 mm	922 × 428 × 160 mm	922 × 428 × 160 mm

Luminous Efficacy	140lm/W
CCT(K)	4000K (Optional 3000K-5000K)
LED Chips	Nichia Chip (Japan)
Input Voltage (AC)	100-240 V AC 50/60Hz
Optional DC Input Voltage (DC)	24-48 V DC (Solar Compatible)
Surge Protection	10kV / 12kV
Operating Temp	-30°C ~ 50°C
PF	>0.90 / >0.92
IP/IK Rating	IP66 / IK08
CRI	>70 (>80 Optional)
Protection Class	Class I
Housing	ALU Alloy + PC Inner Lens + Tempered Glass (Outer)
Optional Controls	DALI / Photocell / Timer Control
Optional Accessories	Photocell Controller / Nema Socket
Lifespan	>70,000 (Ta=30°C@L70)
Warranty	7 Years




Spigot/ Mount Options




earthlight.com.au
1300 410 485
sales@earthlight.com.au

Metro Curve


Dimensions

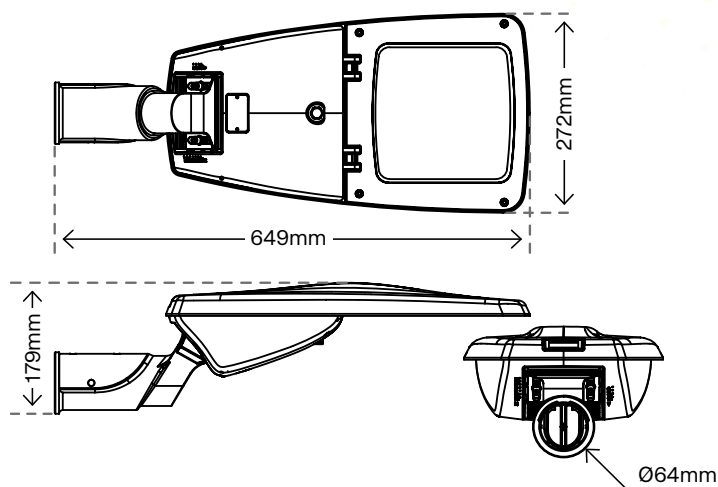

ETG-06MC001
ETG-06MC002
ETG-06MC003

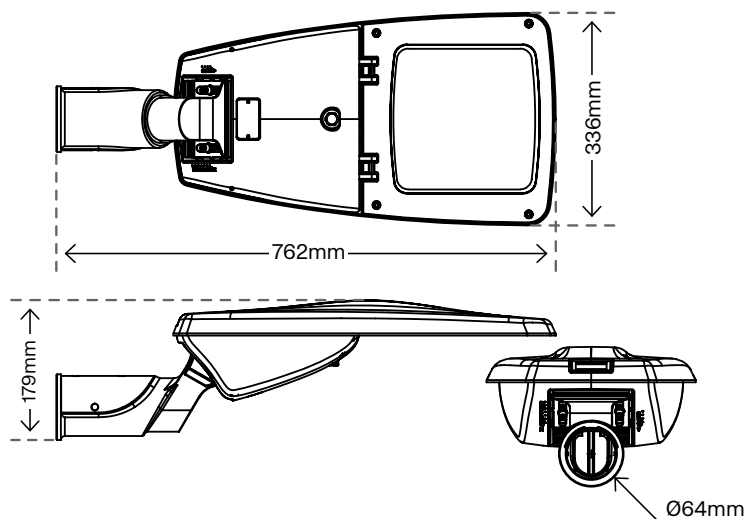

ETG-06MC004
ETG-06MC006

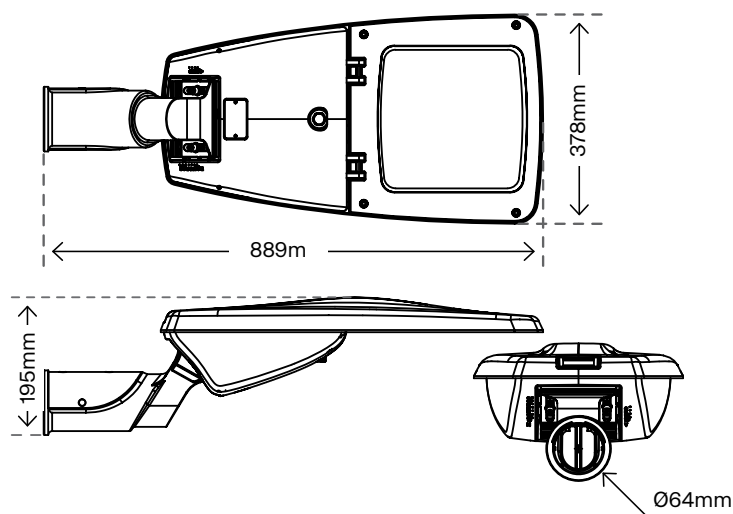

ETG-06MC007
ETG-06MC008



earthlight.com.au
1300 410 485
sales@earthlight.com.au

