


## Modular Flake-Ice Machine up to 200 Kg



ABS plastic top cover



Electronic Controls




Stainless Steel

### Features

- Modular Flake-ice machine, production up to 200 kg in 24 hours.
- Stainless steel "scotch-brite" finish; rounded corners for enhanced aesthetics and ergonomics; top cover in ABS plastic.
- Removable side panels on all four sides to aid routine maintenance and servicing.
- Sturdy evaporator in stainless steel AISI304, auger in AISI430.
- State of the art ice Breaker in special alloy.
- Reduced-maintenance, self-lubricating gear-reducer.
- Oversized hermetic compressor.
- Choice of air or water-cooled condenser.
- Electronic control board with self diagnostic and malfunction alarms.
- Produces Flake Ice, extruded at a temperature just below 0°C, contains 25% residual water content, hence very rich in moisture.
- CFC free R-404A Refrigerant

### MF 36 Technologies

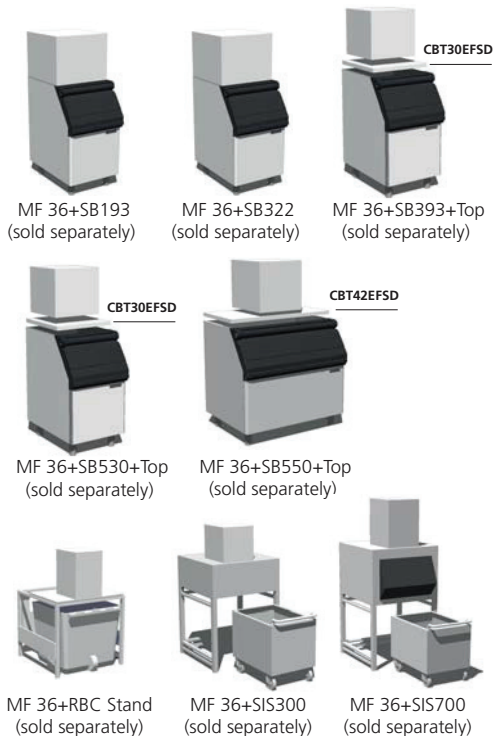

		+C°			
		-C°	10°: 10°C	21°: 15°C	
			[kg] [lbs]	[kg] [lbs]	
MF 36 AS			200 441	185 408	[WxDxH mm] 564x536x531
MF 36 WS			200 441	190 418	[WxDxH inches] 223/16" x 211/8" x 207/8"
				 [v/Hz/ph] 230/50/1	 R 404 A



Ice in its most natural form, made at a temperature just below zero degrees Celsius, contains 25% residual water content, making it very moist. Its flake shape makes it extremely versatile and very simple to use effectively.

Residual water contents 25%


This product qualifies for the following listings:



Certified ISO 9001:2000

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)  
[www.scotsman-ice-on-tablet.com](http://www.scotsman-ice-on-tablet.com)  
 Models and specifications are subject to change without notice.

## Modular Flake-Ice Machine up to 200 Kg

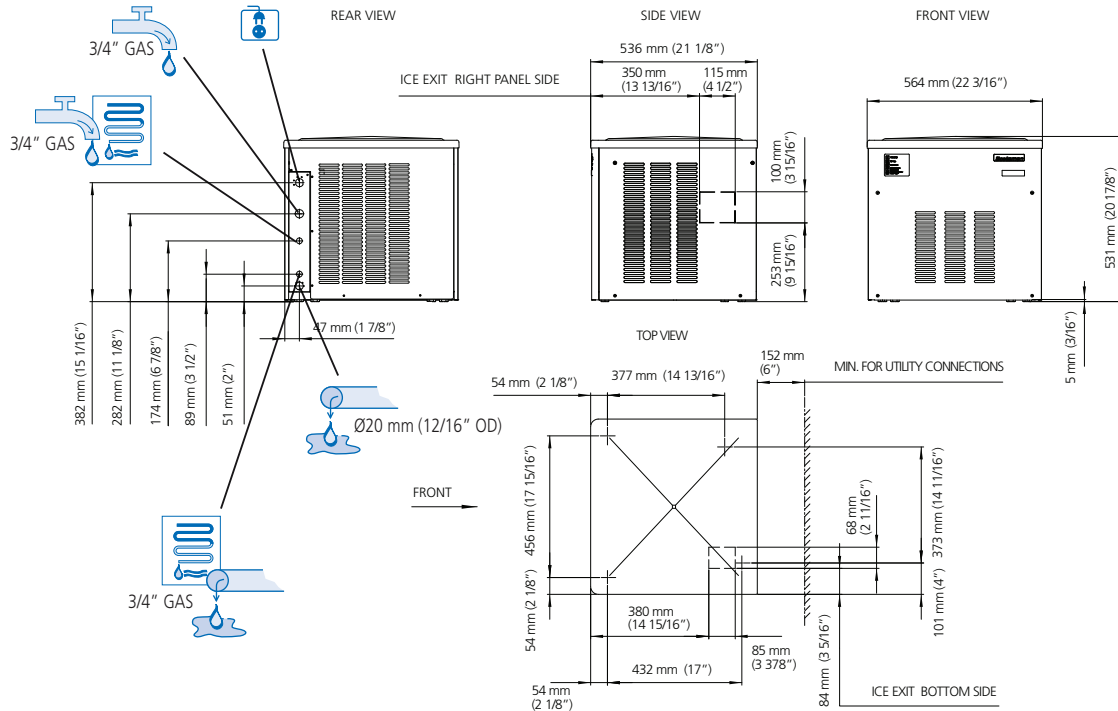

### MF 36 AIR COOLED

°C / °F	50° / 10°	60° / 15°	70° / 21°	90° / 32°
10°	200	193	186	172
50°	441	425,5	410	379
21°	192	185	178	164
70°	423	408	392	362
32°	169	162	155	141
90°	372,5	357	342	311
38°	153	146	139	125
100	337	322	306	275,5

### MF 36 WATER COOLED

°C / °F	50° / 10°	60° / 15°	70° / 21°	90° / 32°
10°	200	193	186	172
50°	441	425,5	410	379
21°	197	190	183	169
70°	434	419	403	372,5
32°	189	182	175	161
90°	417	401	386	355
38°	183	176	169	155
100	403	388	372,5	342



Minimum

Maximum

10°C (50°F)

40°C (104°F)

5°C (41°F)

35°C (95°F)

-10%

+10%

1 BAR

14 psi

5 BAR

70 psi



In 230/50/1 specs



	Icon	[Btu/h]	[W]	[Ømm²]	[W]	FUSE	[kWh] - 100 Kg	[l/h]	[gal/h]	[kg]	[lbs]	[kg]	[lbs]
MF 36 AS		6400	1875	3 x 1,5	760	10 A	11	6.5	1.7	49	108	56	123
MF 36 WS		6400	1875	3 x 1,5	760	10 A	9.7	102	27	49	108	56	123

### CONTACT POINTS:

#### Europe

Scotsman Europe-Frimont S.p.A.  
Ph/Fax +39-0293960208 / 0293960201  
scotsman.europe@frimont.it  
Paolo Moro

#### Middle East & N. Africa

Scotsman-Frimont Regional Office (MeNA)  
Ph/Fax +97-16 5262944 / 165262946  
m.dawood@frimont.ae  
fernando.m@frimont.ae

#### Asia and Pacific

Scotsman Industries (S) PTE. L.T.D.  
Ph/Fax +65-67385393 / 67381959  
scotsman@scotsman.com.sg  
Andrea Tronci

#### South Africa

Scotsman SA (Pty) Ltd - Ice Systems (Pty) Ltd  
Ph +27-0105900609 / 0877200245/6/7/8  
Fax: +27-118264123 / 0866340803  
stuart@scotsmansa.co.za - jennifer@scotsman.co.za

#### India

Scotsman Group India  
Ph/Fax : +91-1244002459 / direct 9560072459  
david.owen@scotsman.com.sg

#### Spain

Scotsman España, S.L.U. c/ Galapagar, 12  
Ph/Fax +34-911109796 / 916337423  
scotsman@scotsman-espana.es  
Daniel Doblado

#### China

Scotsman Ice Systems (Shanghai)  
Ph/Fax : +86-2161313200 / 2161313330  
scotsman.shanghai@scotsman-china.com  
Andrew Clayton