

WHEEL CHOCK




WHEEL CHOCK

PART #: WC5T

- Heavy Duty
- 200mm x 172mm x 150mm
- Hi-Viz Orange Polyurethane
- Suitable for securing cars, utes, trucks, trailers, and caravans, when not in use
- Stainless Steel Wheel chock bracket, with chain also available

SPECIFICATIONS

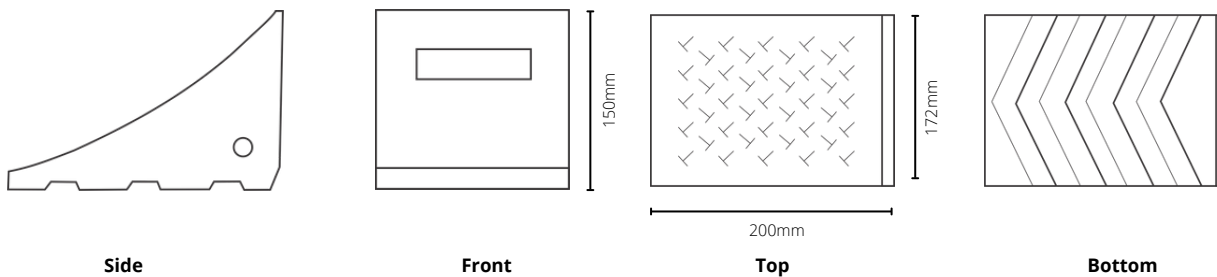

DESCRIPTION

- Rugged Polyurethane Construction
- T-Shaped Surface Area
- Molded Carrying Handle
- Mounting Hole for Rope, Chain or Bracket
- Fluorescent Orange Finish for High Visibility




Up to 800mm tyre size.

A wheel chock should approximately be 1/4 the height of the fitted tyre.

- Car
- Ute
- Trailer
- 4WD

**Wheel chock should be placed securely and centered against the tyre, with the brake activated, on the downhill side of the tyre.*

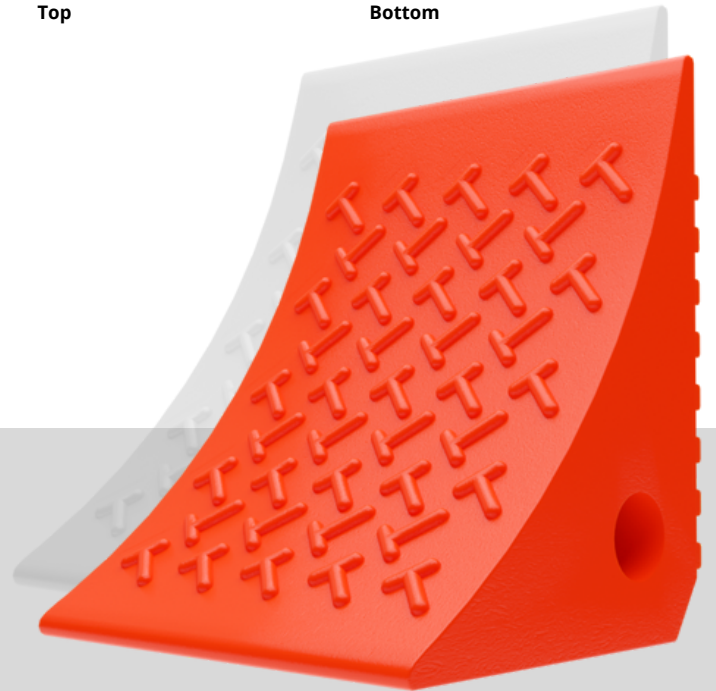

PROGRESS BEYOND DEVELOPMENT