

Portable Solar Lighting Tower

LT4100S

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- GB 7000.1-2002
- GB7003-86
- GB/T3741-1999
- IEC60598-1
- GB4208-2008
- VSB 1 Rev 4 June 1999
- AS3000: 2018
- AS3010: 2017

Design Conditions

- Installation place: outdoors.
- Working Temperature: 0° to 50° (-25° with optional kit)

Painting Process


- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.

2 General Features

- Lumen Output 60000lm
- Mast Height 7.5 Metres
- Mast Type : Hydraulic
- Hydraulic light pole lifting (5850mm), rotating (355°), pitching (80°)
- 4 x 100W LED Modules
- Coverage:60 x 40m at 5 lux
- Trailer Type: Single Axle
- Tyre and Rim Size:14'
- Stabiliser Supports :4 x Manual
- Mudguard / Wheel Chock:Included
- Security: Wheel lock / hitch lock, wheel clamp, folding drawbar
- Features:Timer, day/night modes, jack pads, audio safety messages fire extinguisher, isolators, tilt sensor
- Easy maintenance
- Operation Manual/Specifications

3 Equipment Specification

Model.....	SL60K
Light type.....	LED
Luminous flux(Max)lm.....	60000
Approximate Weight.....	1390kg
Total lighting wattage.....	4x100W
Tire number.....	2
Dimensions (Fully retracted).....	2300*1472*2515mm
Dimensions (Fully extended).....	3230 *3610*7500mm
Tilting Angle of Light Fixture rotation.....	80°
Maximun towing speed.....	80km/h
Maximun wind speed rating.....	90km/h
Efficiency (solar).....	1 hour of sun/4 hours of light
Fully extended/retracted time.....	8/10s
Hydraulic oil type.....	L-HM46
Average daily working hours.....	10H
Continuous lighting duration.....	50H
Voltage/Ampere.....	DC 48V/8.3A

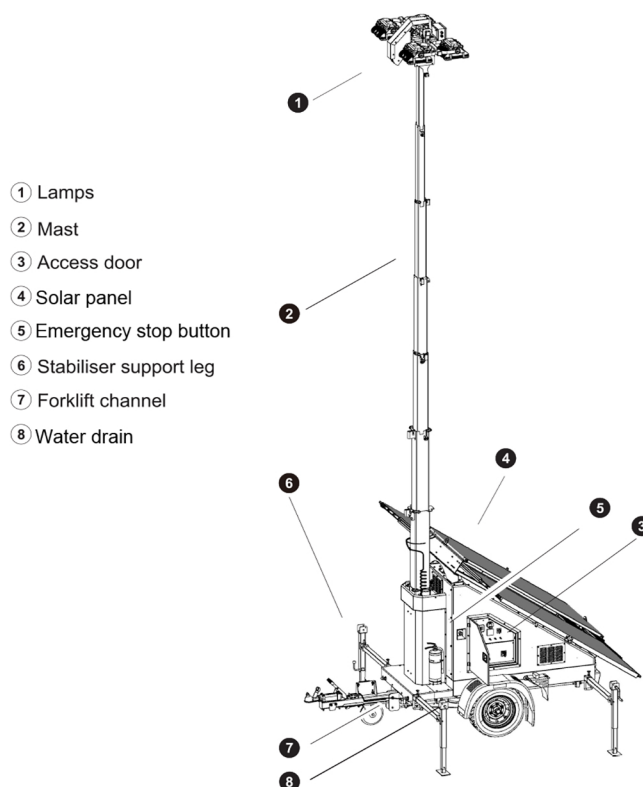

Battery

Battery..... 15 kWh Lithium
Runtime..... 40 Hours
Capacity of battery..... 15000wh
Depth of discharge.....95%
Number.....1
Battery operating voltage.....45V~57.6V DC
Rated battery voltage.....51.2V DC
Charging and discharging current.....<100A
Number of cycles.....3000 times at25 ℃
Battery discharge depth..... <80%
Battery operating temperature.....-1 0℃~5 0℃
Communication modeRS485/CAN


Solar panel

Max power of solar panel series panel.....1380W
Maximum conversion efficiency21.32%
Average daily working hours.....10H
Solar panel open circuit voltage..... 41.33V DC
Maximum working current of a solar panel board.....13.45A
Number..... 3
Dimension1903*1134*30mm
Weight.....24.2kg

LED Light


Number 4
Power..... 100W
gross power..... 400W

Control System



This control system is an advanced control module based on microprocessor, which is suitable for solar tower. The controller is equipped with a powerful graphical display that displays ICONS, symbols and bar charts for intuitive operation. Accurately measure various operating parameters, and display all values and alarm information on the LCD.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of light tower
- Manual, automatic and remote work mode selectable
- Adjust the lamp Angle and operate the lamp
- The micro circuit breaker is configured
- The battery isolation switch is configured

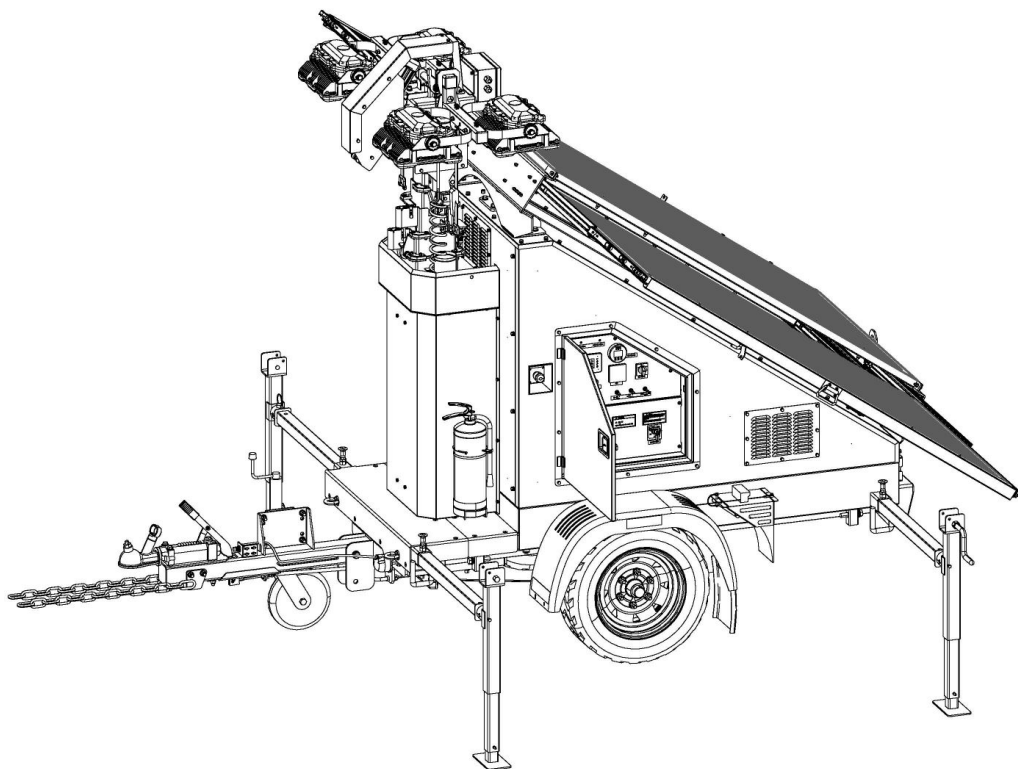

5 Illumination region parameter

Lighting area 5000m², effective lighting area 2400m²@5LM.

