

# salva



## SALVA FRIO FC-SR



The fermentation chamber FC-SR introduces the comfort and advantages of the retarded fermentation in the small bakeries that based its production on the use of racks.

### CHARACTERISTICS

#### ■ Multipurpose

It is easy to install and has the ability to develop retarded or direct fermentation.

#### ■ Optimum air distribution

Provided by the reflectors located in the posterior region of the cabinet, trying carefully to the most sensitive products.

#### ■ Safety

Door with electromagnetic closure, managed from the control panel with manual safety opening in the outside and inside.

Compact and modern design ■

Frontal cooling ■

This characteristic allows the placing of multiple machines next to each other without the need of leaving an space between them.

Control Panel FC-Touch ■

Equipped with the most advanced software can be adapted to the needs of the user.

## FC-SR DETAILS AND COMPOSITION

- Two capacities are possible:

- 2 racks of 60 x 40 cm.
- 1 rack of 80 x 60 cm.

- R134 A fluid refrigerator.

Use of refrigerant which does not damage the ozone layer.



- Working temperature

Between -2°C and 40°C to adapt to its different uses.

- Insulation

With a 60 mm thickness on the walls and 40 mm on the floor.

## GENERAL DIMENSIONS

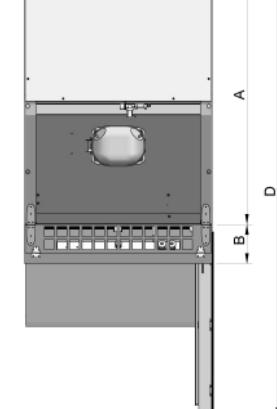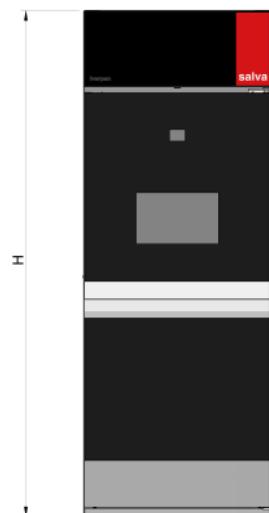

FC-SR	A	B	C	D	H	Weight
	1150 mm	180 mm	850 mm	2035 mm	2315 mm	420 kg

## INSTALLATIONS IN DETAIL

- Water supply

Network with maximum pressure intake between 1-1,5 kg/cm<sup>2</sup>. It is necessary to set manual key between the connection of the IVERPAN and the general water supply (rubber tube provided by SALVA).

- Drainage


The drain connection from the IVERPAN to the premises is done by 20 mm diameter rubber tube.

- Electric power supply

The electrical connection should be performed by authorized professionals, following the rules in force in each country.

- Facilities location (mm)

	X	Y	Z
Water supply (1)	418	608	2133
Drainage (2)	425	0	1986
Electrical supply (3)	183	1238	2232

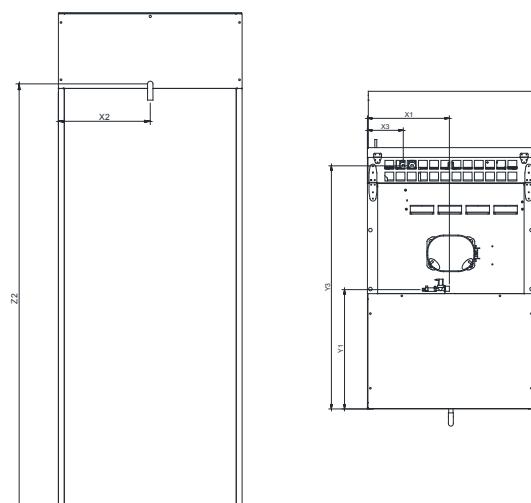

Technical sheet\_FC-SR\_(english)271017