**HOUNÖ**

Visual Cooking 1.06

SmartTouch® display   Standard display

VISUAL COOKING OVEN

6-tray combi oven (1/1 GN, 65 mm U) or
5-tray combi oven (1/1 GN, 85 mm U) or
5-tray bakery oven (400x600 EN, 85 mm L)
Electricity or gas
Injection or hybrid steam (mix of injection steam and
steam from the steam generator)
SmartTouch® or Standard selection dial interface
2-piece rack
Integrated hand shower

DIMENSIONS & WEIGHT

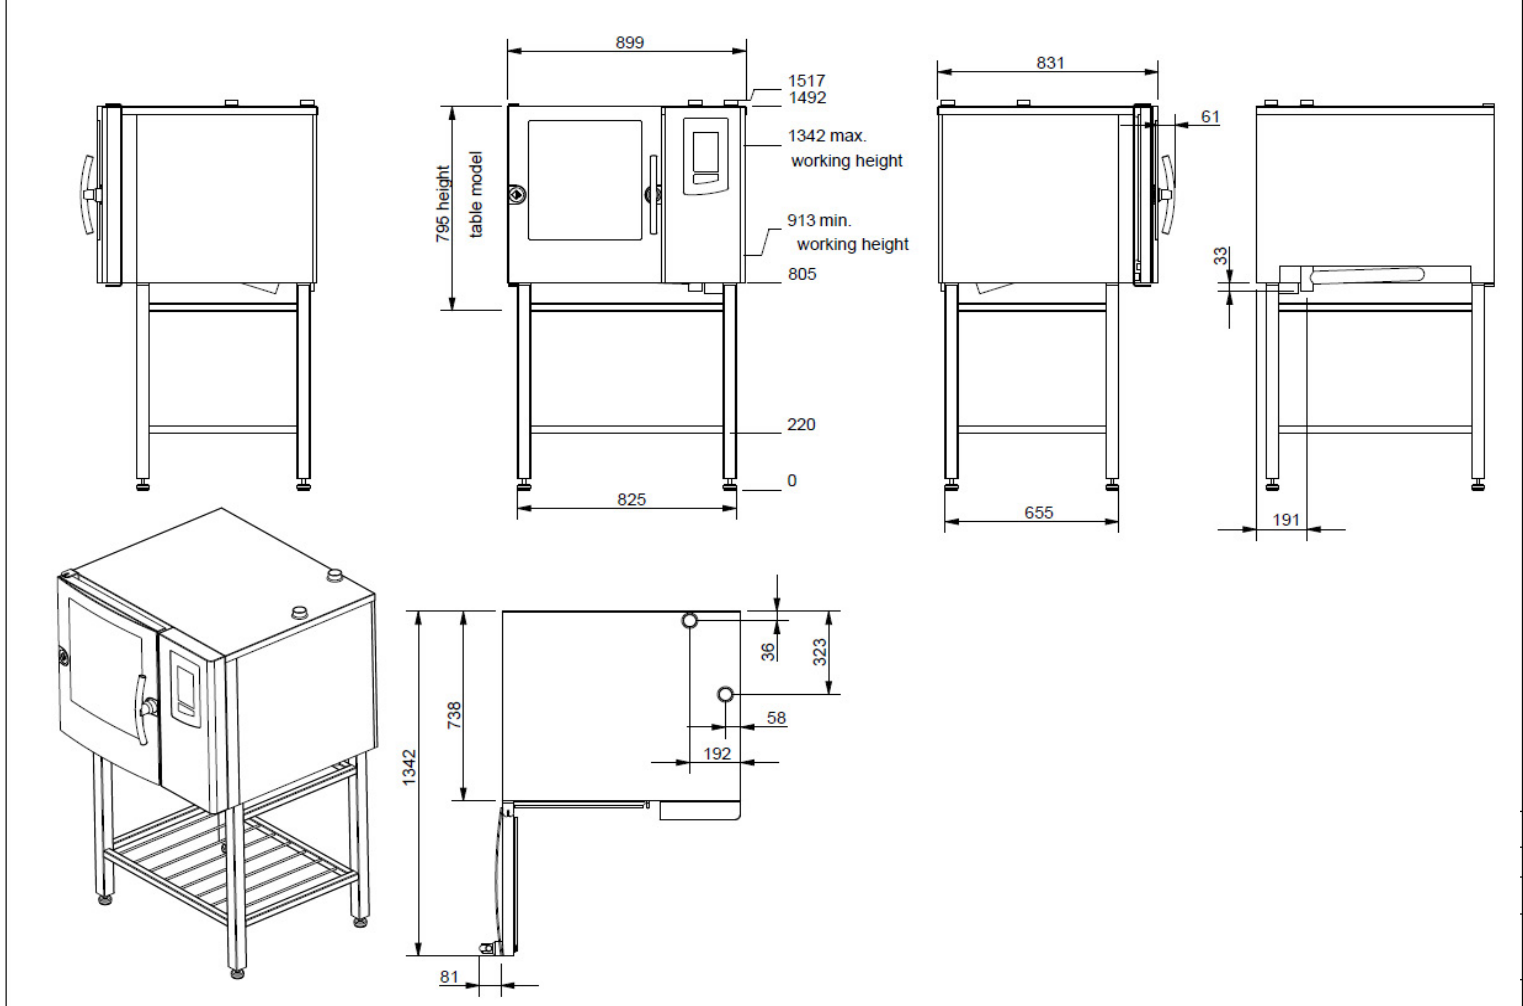|	
Width	897 mm
Height, table model	815 mm
Height, with stand	1492 mm
Depth, excl handle	831 mm
Weight, electric oven	150 kg
Weight, gas oven	155 kg

STANDARD SPECIFICATIONS ELECTRICAL OVEN

Voltage	3 NAC 400 V
Wattage	9 kW
Power consumption	13 A
Pre-fuse	According to local regulations
Water connection	3/4", outside
Drain	Ø50 mm, outside

STANDARD SPECIFICATIONS GAS OVEN

Voltage	1 NAC 230 V
Wattage	1 kW
Power consumption	8.5 A
Pre-fuse	According to local regulations
Water connection	3/4", outside
Gas connection	3/4", outside
Drain	Ø50 mm, outside
Power, hot air	13 kW
Power, steam generator	11 kW

899
1517
1492
1342 max. working height
795 height table model
913 min. working height
805
220
0
825

831
61
655

33
191

1342
738
36
323
58
192
81

Cooking modes for Touch and Standard models:

- Hot air (convection)
- Steaming
- Low-temperature steaming
- Forced steaming
- CombiSmart® humidity control, 10 steps
- Cook & Regen
- Proving with automatic humidification
- Preheating
- Automatic cooling function
- Manual humidity pulsing
- Reversing, adjustable fan with 9 speeds

Additional cooking modes for Touch models:

- SmartChef®, automatic cooking
- ClimaOptima®, automatic humidity control
- Automatic humidity pulsing
- RackTimer® with up to 20 timers
- Cool-down function
- Delta-T
- Cook & Hold

Additional features for Touch models:

- Let's Cook Cloud Solution
- CombiWash® automatic cleaning system
- HOUNÖ PROTECT start kit
- Multipoint temperature probe
- Chef's recipe collection
- Baker's recipe collection
- Favourites selection
- Quick Select Recipes (QSR)
- Advanced RackTimer for tailored menu handling
- Keypad for temperature adjustment
- HACCP quality control, 60 days in PDF format
- USB connection

WARRANTY 4 YEARS

Tested quality and safety:

ETL LISTED · UL · CE · DVE · kiwa · EAC · HKI · WRAS APPROVED PRODUCT

FOR MORE INFORMATION, VISIT WWW.HOUNO.COM