
## **Cleaner's Sink**



## 1) Fixture strength is ultimately determined by the load capacity of the supporting structure (noggins recommended for stud wall construction) and use of appropriate fixings (i.e. sleeve anchors for masonry walls).

2) Sink is mounted to wall via two brackets (inserted into side fascias of sink). 3) Additional front support legs that fix to the underside of the sink are supplied only where requested (product code CSL).

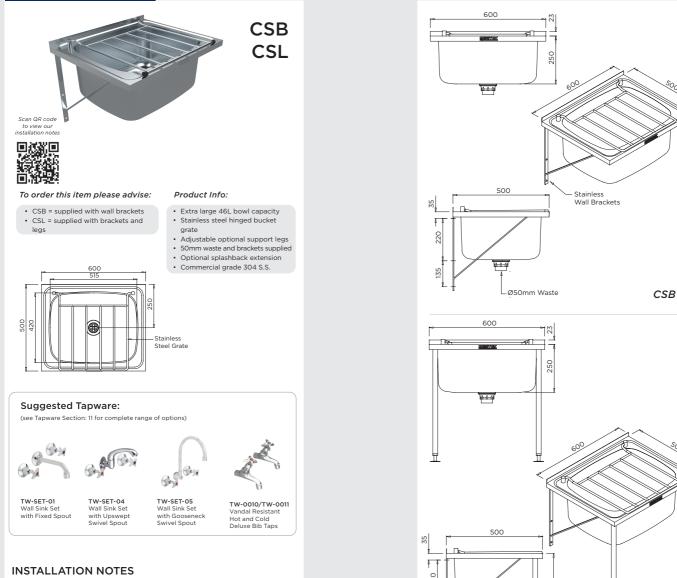

Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print Ø50mm

Stainless steel adjustable feet

Waste

135

610

#CS

COMMERCIAL SINKS

CLEANER'S SINK

500

CSL

Please refer to britex.com.au for the most current product information

Allow +/- 5mm tolerance for dimensions and setouts shown in product literature

500