

## CR6D

### 600mm Four Burner Gas Range Static Oven



CR6D

- 600mm wide
- 4 open burners
- 22MJ open burner rating
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners
- Cast iron burners and vitreous enamel potstands
- High crown static oven
- 1/1 GN pan capacity
- Manual pilot ignition
- Side hinged door
- Vitreous enameled oven liner
- Adjustable front feet and rear rollers
- Stainless steel finish
- Fully modular

#### Also Available



CR6B



CR6C

#### OVERALL CONSTRUCTION

##### Cooktop

- Cast iron open burner heads with vitreous enamelled cast iron caps
- Vitreous enamelled potstands
- Vitreous enamelled control panel
- Stainless steel front, sides and splashback
- Stainless steel spill tray

##### Oven

- Vitreous enamelled oven liner
- GN 1/1 capacity with 4 position racking
- Supplied with one chrome plated oven rack
- Vitreous enamelled oven spill tray
- Stainless steel door and sides
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear

#### CONTROLS

##### Cooktop

- Large easy use control knobs
- Variable high to low controls to open burners
- Flame failure standard on open burners
- Optional pilot and flame failure on open burners

##### Oven

- 100-310°C thermostatic oven control
- Piezo ignition to oven pilot burner with flame failure

#### CLEANING AND SERVICING

- Easy clean stainless steel exterior
- Vitreous enamelled potstands and burner caps
- Lift off open burner caps and removable burners
- Removable spill trays
- Access to all parts from front of unit

#### Matching Products



CW2H



CSP6



CN4



CT9



CW3H



CW1H





CP4



CS9 / C900-S

## CR6D

### 600mm Four Burner Gas Range Static Oven

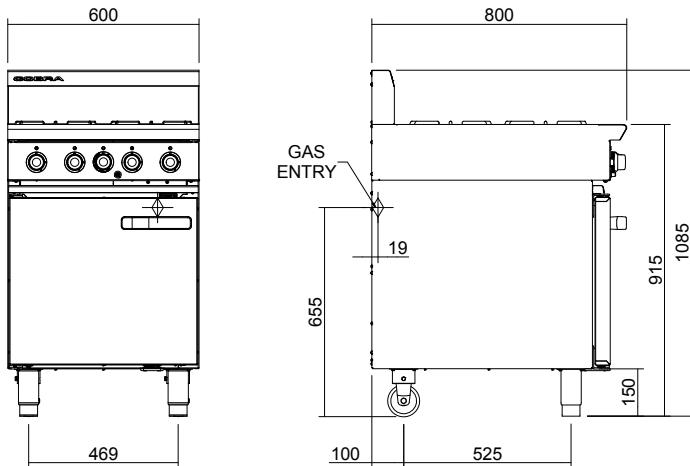

CR6D

#### SPECIFICATIONS

**Burners**  
Open Burners;  
22MJ/hr, 6.1kW each

**Oven; 24MJ/hr, 6.7kW**

**Gas power (gross)**  
CR6D 112MJ/hr, 31.1kW

**Oven dimensions**  
Width 460mm  
Depth 615mm  
Height 365mm

**Rack size**  
450mm x 590mm  
Rack positions 4

**Gas connection**  
R 3/4 (BSP) male  
130mm from RH side, 20mm from rear, and 655mm from floor

**Dimensions**  
Width 600mm  
Depth 800mm  
Height 915mm  
Incl. splashback 1085mm

**Nett weight**  
99kg

**Packing data**  
0.85m<sup>3</sup>, 130kg  
Width 710mm  
Depth 955mm  
Height 1250mm

**Gas types**  
Available in Natural gas and LP gas,  
please specify when ordering  
Other gas types on request

moffat.com.au  
moffat.co.nz

Australia  
moffat.com.au

Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone +612-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone +613-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone +617-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone +618-9413 2400  
wasales@moffat.com.au

New Zealand  
moffat.co.nz

Moffat Limited  
Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz

Auckland  
Telephone +64 9-574 3150  
sales@moffat.co.nz



Cert. No. AGA 6878G

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
AN.C.01.19 / 1598

an Ali Group Company



The Spirit of Excellence