

ZOE

COMPETITION



Features



ELECTRONIC AUTO-LEVEL

Through an electronic level probe, the boiler is automatically filled and maintained to the right filling level.



ACTIVATED ELECTRONIC PREINFUSION

Management of the delayed activation of water solenoid in the first phase of brewing.



DOUBLE READING GAUGE

Allows you to control the boiler pressure and the distribution pressure at the same time.



EASY SERVICE

Fast access to the internal parts, for quick and easy technical service.



AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning.



LED LIGHTING

Allows efficient working in any condition of environmental lighting.



SHOT TIMER

Allows you to accurately and reliably time coffee extraction.



AISI 316L STAINLESS STEEL "COOL TOUCH" STEAM WANDS

Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.

Technical data

		2 GROUP STD	2 GROUP TALL 15AMP	2 GROUP TALL 20 AMP	3 GROUP TALL
voltage	V	220 - 240 1N 50 / 60Hz or 380 - 415 3N 50 / 60Hz			
power input	kW	3.15	3.15	4.3	5.8
required amperage	A	15	15	20	25
steam boiler capacity	lt	10	10	10	14
steam boiler element	kW	2.7	2.7	4	5.6
pump power	kW	0.13	0.13	0.13	0.13
net weight	kg	55	59	59	69

2 GROUP


2 steam taps	2 steam taps
1 water tap	1 water tap
1 one-cup portafilter	1 one-cup portafilter
2 two-cup portafilters	3 two-cup portafilters

3 GROUP




Versions and Dimensions


STANDARD

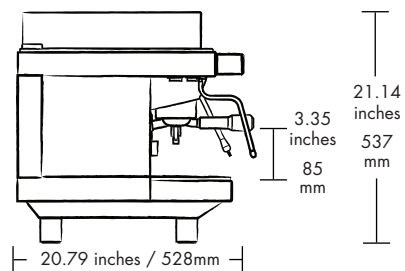


TALL

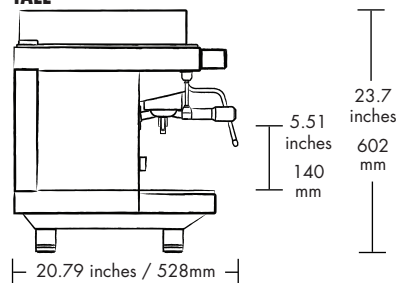



2 GROUP



3 GROUP

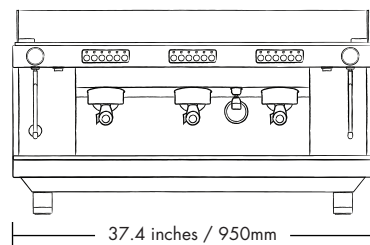

Easily Customisable Panels



Easily removable panels for full customisability.

Colours



All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.

CONTACT US

info@sanremomachines.com.au
sanremomachines.com.au

