

TUMBLE DRYER XCONTROL FLEX

**DX
RANGE**

DX35

35KG
75LB



PLATFORM: XCONTROL FLEX / XCONTROL FLEX PLUS

- Available in 2 versions, XControl FLEX and XControl FLEX Plus
- 7" (5" on stack tumbler dryers), full color, touch screen display
- Clear step-by-step instructions available in 34 languages
- Machine programming & performance data accessible through cloud. Remotely access to live machine data on mobile device
- **VEND:**
 - 5 standard dry programmes (High, Medium, Low, Delicate, No Heat)
 - 11 easy-to-use cycle modifier
- **OPL:**
 - 30 standard dry programmes,
 - Total memory capacity for 99 programmes
 - Advanced cycle programmability for OPL
- Count up timer
- Over-the-air updates

FEATURES

- Electrical, Gas and Steam heating
- Large door opening for easy loading and unloading (Ø 68cm)
- Galvanized drum
- Radial airflow
 - drum perforations over the entire surface
 - high production
 - pulley drive system
- Self cleaning large lint filter for easy removal and efficient drying
- AutoDry capability for OPL
- Reversing drum: prevents linen from tangling
- Moisture sensing system, Sensodry+, optional for OPL
- Stainless steel drum
- Stainless steel front panel with black painted door
- Grey painted side panels
- Coin operated version
- SafeTech™ Fire Suppression System as an option
 - Prevents early laundry fire by constantly monitoring the temperature in the drum
 - In case of excessive temperature, linen is sprayed with water



FAST DRYING




EASY OPERATION



SERVICE FRIENDLY

GET AHEAD IN LAUNDRY

TYPE		DX35
CAPACITY		
Capacity	kg	35
Drum volume	l	634
Drum diameter	mm	Ø 940
AIRFLOW		
Airflow	l/s	380 (G 330)
DRYING AVERAGE		
Gas heating	g/min	571
Electric heating	g/min	521
MOTOR		
Fan	kW	0,4
Drive	kW	0,4
GAS HEATING		
Energy	kW	48,4
Energy	kBTU/h	165
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz
Gas connection	NPT	½"
STEAM HEATING		
High pressure 6,9 bar	kW	39,24
	kBTU/h	133,9
Electrical connection		1×100-120V/50-60Hz, 1-3×200-240V/50-60 Hz 3×440-480V/50-60Hz, 3×380-415V/50-60Hz
Steam connection	NPT	¾"
ELECTRICAL HEATING		
Energy	kW	36
Electrical connection		1×200-208V/50-60Hz, 3×200-208V/50-60Hz, 1x 230-240V/50-60Hz, 3x 230-240V/50-60Hz, 3x 380V/50-60Hz, 3x400-415V/50-60Hz, 3x 440V/50-60Hz, 3x 460-480V/50-60Hz
EXHAUST	Ø /mm	200
DIMENSIONS		
Size H×W×D	mm	1960×980×1350
Net weight (E, G, S)	kg	320, 310, 325
TRANSPORT DATA		
Packed (foil E, G) H×W×D	mm	2060×1050×1420
Packed (foil S) H×W×D	mm	2120×1050×1420
Gross weight (foil,E,G,S)	kg	340, 330, 350
Packed (crate) H×W×D	mm	2240×1170×1500
Gross weight (crate,E,G,S)	kg	410, 395, 415

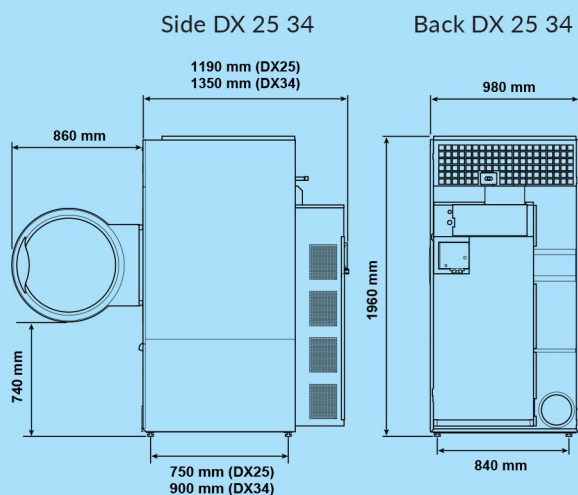

CALL US ON 1300 355 769
VISIT OUR WEBSITE www.totalce.com.au

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

Primus by Alliance Laundry Systems

