

monitor

the world's
best equipment
supported
locally

Sales | Service | Parts | Hire | Finance

Monitor 54T Spider Lift

1800 025 024
monitor.net.au

@MonitorAUS



V1.0 - 250731




MONITOR 54T

The Monitor 54T Spider Lift is a concentrate of technology; its potential allows it to be the ideal solution for large projects and 'logistical' challenges requiring a higher vertical load-bearing capacity.



Its distinctive feature is its working height, which places it at the top of the industry. Thanks to Platform Basket's experience and design and construction expertise, operators can now reach places that are not usually accessible, opening up new perspectives in areas such as construction, infrastructure maintenance, telecommunications and industry.

The platform is equipped with a telescopic jib with three hydraulic extensions, which allows a horizontal reach of 18.5 m at a height of 45 m and with 400 kg in the basket (the maximum value is 20 m with 136 kg capacity). The working height, together with the triple stabilisation area, offers a versatile solution for large projects and contexts with highly variable placement conditions.

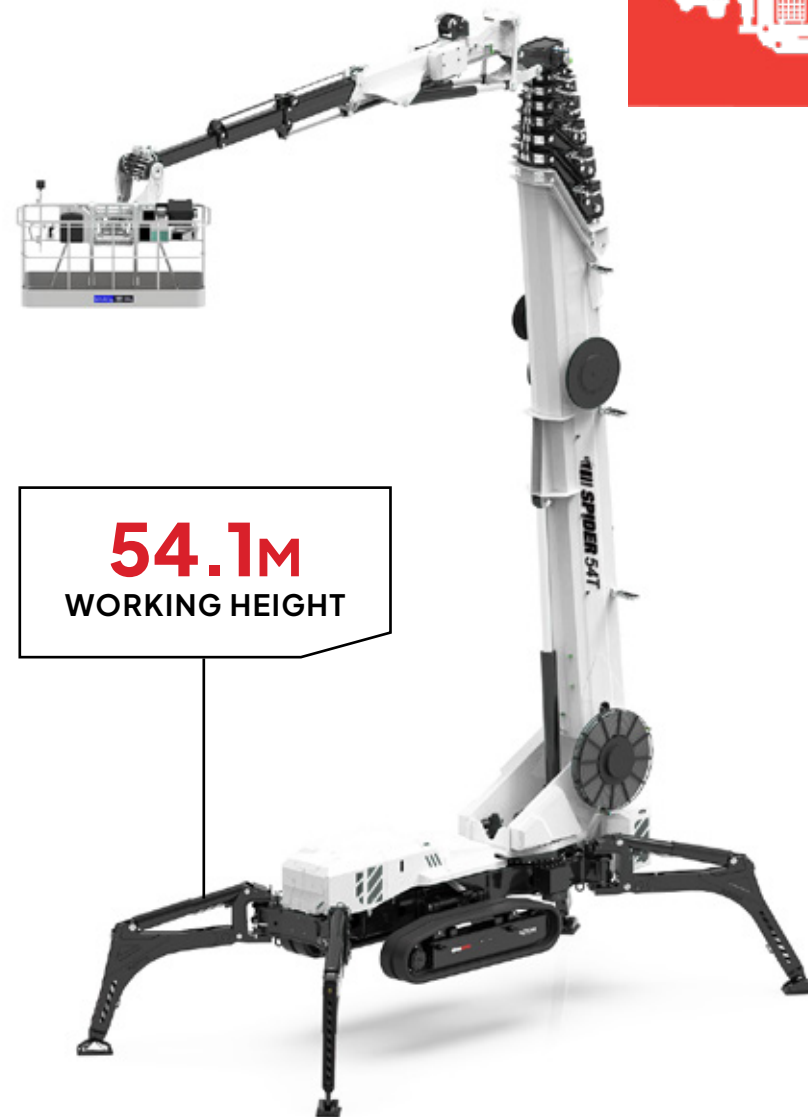



Technical Specifications

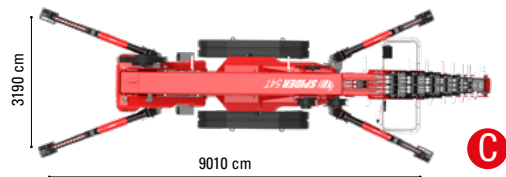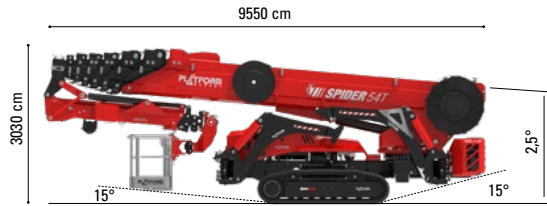

TANK CAPACITY

Hydraulic oil tank	210 L
Fuel tank	100 L

MACHINE WEIGHTS

Weight (basic version)	23000 kg
Ground pressure on stabilisers	167 kN

MOTOR

Net input power	53 kW
Technical data	12 V

HOISTING WINCH

Direct Pull	1000 kg
Quantity of Rope	56 m
Max. Hoisting speed	20 m/min
Rope Diameter	8 mm





Compliant with:
 - UNI EN 13000 Cranes - Mobile Cranes;
 - ISO4301-1/2 Cranes

(All specs E&OE and subject to change)

Max working height	54.1 m
Max platform height	52.2 m
Max horizontal outreach with load basket 136 kg	21 m
Max rated capacity	400 kg
Turret rotation	360°
Basket rotation	±180°
Max slope	20°
Max side slope with narrow/wide carriage	12 / 15 m
Max travel speed	2.2 km/hr
Norminal track dimensions	450 x 78 x 81 cm
Max permissible wind speed	12.5 m/sec
Max permissible manual stress	400 N

DIMENSIONS

Max permissible inclination on outriggers for AWP working consent	±1°
Machine length folded with basket	9.55 m
Machine length folded without basket	9.55 m
Machine width folded with basket	2.43 m
Machine width folded without basket, tracks retracted	1.75 m
Machine height folded with retracted carriage	2.45 m
Undercarriage height (with undercarriage extended)	0.42 m
Aluminium basket size	2.3 x 0.91 m

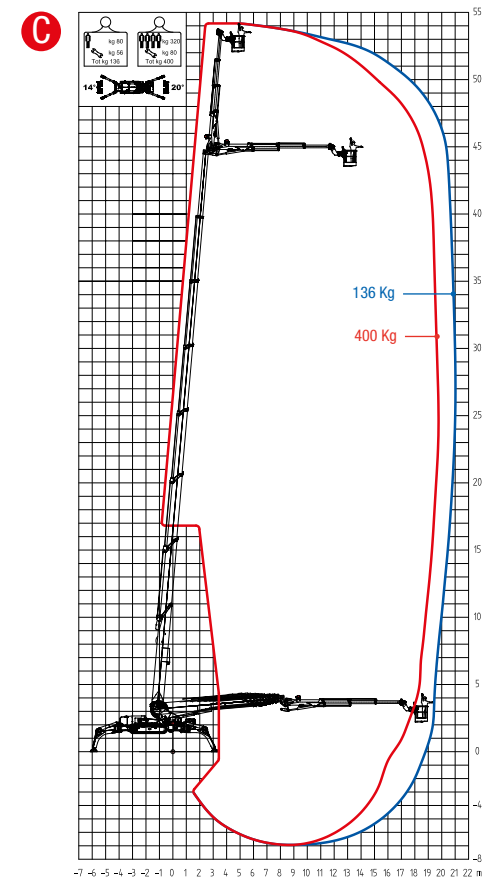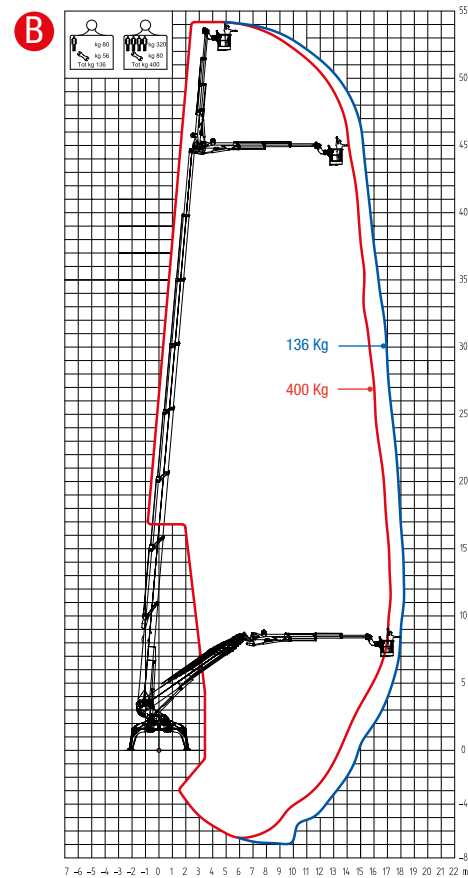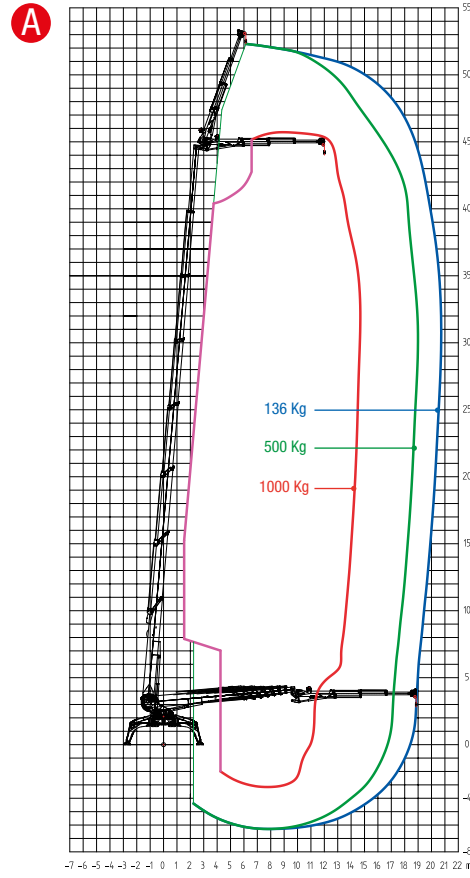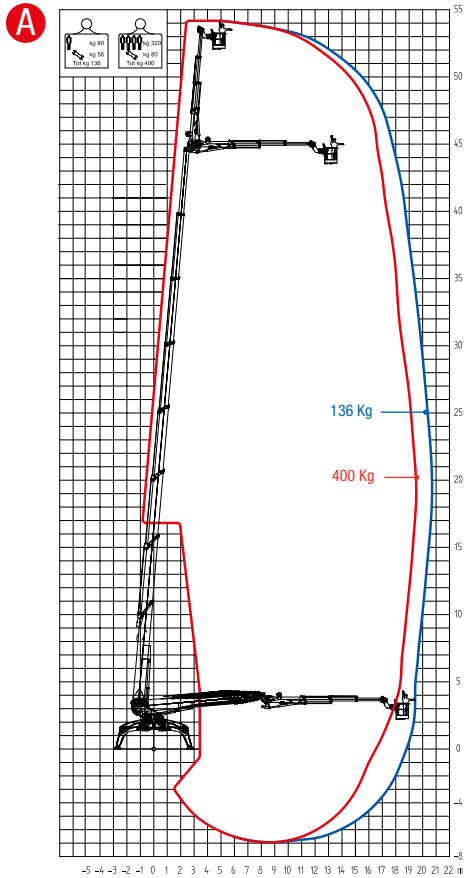

Optional Accessories

1000 kg Winch

Switch out your Spider Lift's basket to a 1000kg Lifting Winch when needed.

Transform your Spider Lift to a Spider Crane, and easily hoist materials easily.







—
**minimised
downtime
guarantee***
—



Our Locations

Branches & Service Centres



Tamworth

143 Gunnedah Rd
Tamworth NSW 2340



Sydney

49-50 Cassola Pl
Penrith NSW 2740



Melbourne

24-28 William Rd
Dandenong South VIC 3175



Brisbane

191 Magnesium Dr
Crestmead QLD 4132




Brisbane - Caboolture

2 Alta Road
Caboolture QLD 4510



Perth

11 Reihill Rd
Maddington WA 6109

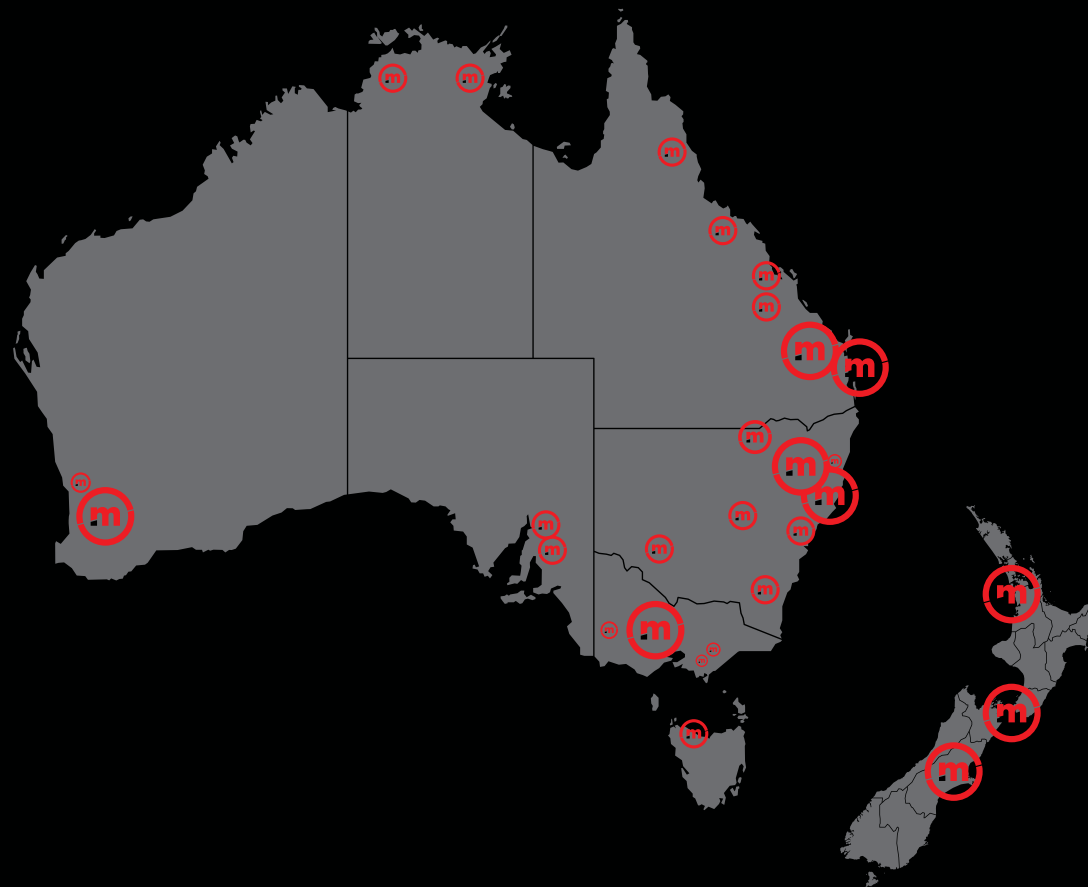

agent@monitor.net.au

1800 025 024
monitor.net.au

@MonitorAUS



monitor

the world's best equipment supported locally

Monitor 54T Spider Lift

9