

Features and Benefits

Field Proven Design
Reduced Contamination
Minimal Residual
Low Profile

Usage




for static storage use only

Capacities

1,500 litre

Applications

Hazardous Liquids
Corrosive Liquids
General Service

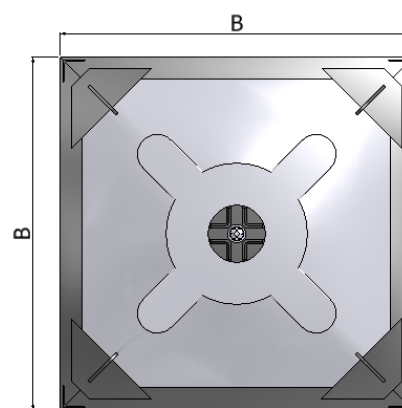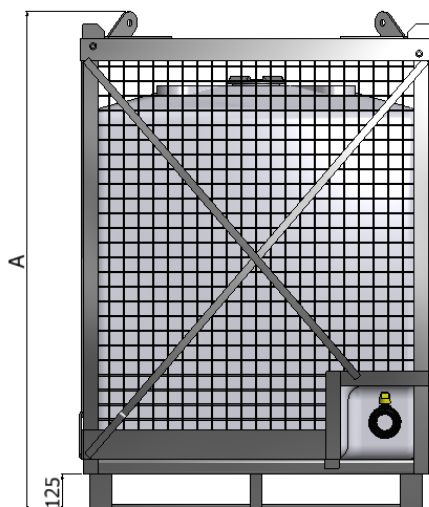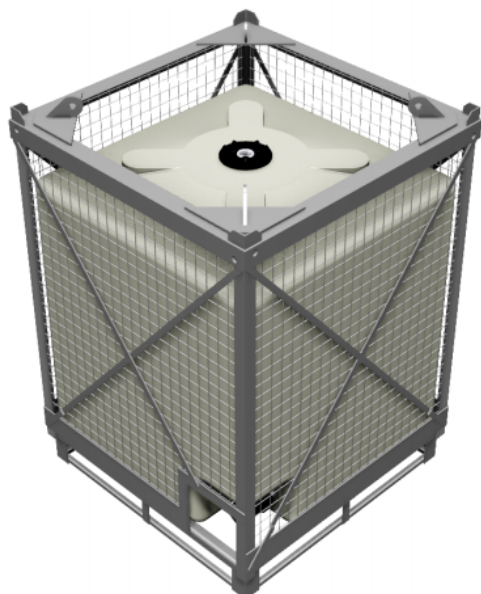

Standard Equipment

- Discharge 50mm Ball Valve Camlock
- Fill: 150mm screwed cap
- Bottom lift: 4 way fork entry
- Top Lift: 4 lifting lugs

Materials

- Bottle: Polyethylene
- Frame: Galvanised steel
- Valve: Polypropylene
- Camlock: Polypropylene

Options

- Dry break couplings
- Desiccant filtration
- Vapour recovery point
- Pressure & vacuum vents
- IBC Cover

Dimensions, Capacities & Weights are nominal only.

Code	Volume	Dim A (mm)	Dim B (mm)	Weight (kg)	Maximum liquid specific gravity	Test Pressure
CHEPHD1500	1,500 L	1698	1198	295	2.0	250 kPa

Note: Static Storage use only - not UN Approved.