



AUSSIE QUIK PRIME PETROL DRIVE TRASH PUMPS

Rugged trash pumps in 2", 3" and 4" with flows to 1800 litres per minute, heads to 27 metres and suction lift to 7.6 metres.

Aussie QP trash pumps feature unique mechanical seals that outlast conventional seals by up to six times. A big front mounted

cleanout port enables pumps to be purged of debris without disconnecting pipe work.

The high SG, cast iron, non clog style, open impeller and volute system is designed to pump solids and resist wear.

Features

- **Five year** pump end warranty
- **Big non clog** open style impeller
- **High SG grade** cast iron impeller volute
- Front mounted clean out port
- Super robust aluminium body
- Full carry frame
- **Genuine Honda** engines used with all models with oil alert & low oil protection
- Coupling & strainer kit included
- Diesel drive options with Yanmar or Kubota engines (see separate spec sheet)

Benefits

- » Great quality ... use with confidence
- » Pumps solids in suspension
- » Resists wear and abrasion
- » Makes pump chamber clearance easy, no dismantling of pump body or pipe work
- » Corrosion resistant, long life
- » Protects pump, facilitates transport on site
- » Tried and proven with established service networks throughout the world
- » Convenience and cost savings
- » Economy and longevity



QP203T/GX160

POWERED by
HONDA



Applications:

- Construction site dewatering
- Waste water handling
- Effluent pump out
- Livestock waste water disposal
- Solid laden mine waste pump out

Specifications

Model	Engine	Type		Engine model	HP	Max Head (m)	Max Flow (lpm)	Suction port	Discharge port	Self primes to (m)	Max solid size
QP203T	Honda	4 Stroke	Petrol	GX160 or GX200E	5.5, 6.5	27	630	2"	2"	7.3	0.75"
QP300T	Honda	4 Stroke	Petrol	GX160 or GX200E	5.5, 6.5	27	850	3"	3"	7.4	0.75"
QP301T	Honda	4 Stroke	Petrol	GX240 or GX390E	8, 13	27	1200	3"	3"	7.5	1"
QP40T	Honda	4 Stroke	Petrol	GX390E	13	24	1800	4"	4"	7.6	1.5"

NOTE: Aussie stock codes for QP pumps are determined by using the pump & engine model, for example QP300T/GX200E is the 6.5HP Honda, electric start version of the QP300T

Five Year Warranty:

Aussie Quik Prime pumps carry a unique pump end **five year warranty**. The products are guaranteed to be free of faulty workmanship or material for a period of five years after the date of sale to the end user.

Only **top quality genuine** brand engines by reputable manufacturers are used. A **3 year Honda year GX engine** warranty applies, administered by the Honda international service network.

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.






AUSSIE QUIK PRIME PETROL DRIVE TRASH PUMPS

Construction:

Front case	Marine grade aluminium
Volute	High SG grade cast iron
Back plate	Marine grade aluminium
Mechanical seal	Silicon carbide
Outlet	Marine grade aluminium
Casing bolts	Zinc plated steel
Check valve	Nitrile rubber
Priming & drain plugs	Polycarbonate
Casing, priming & drain plug o-rings	Nitrile rubber
Finish	Brushed aluminium (except QP40T)
Impeller	High SG grade cast iron, non clog, open type

Dimensions:

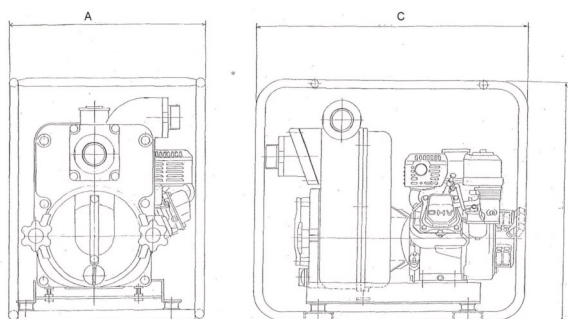

Model		Width A (mm)	Height B (mm)	Length C (mm)	Weight (kg)
QP203T		471	576	589	56
QP300T		506	576	637	58
QP301T		493	646	656	70
QP40T	recoil electric start	602 642	734	701	90 95



QP301T/GX240




QP40T/GX390

Performance Curve:

Golden Rule

Operate pump at the best efficiency point
... 85% of max pump head

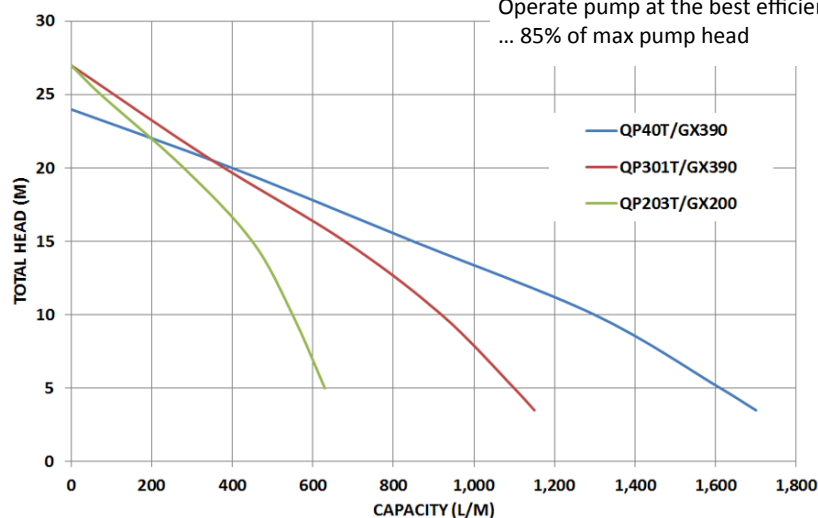

Standard Accessories:

- Coupling kit & strainer
- Full frame

Optional Accessories:

- Heavy duty suction hose
- Lay flat delivery hose
- Yanmar, Robin or Kubota air cooled diesel engine drive available
- Full galvanised roll frame available for corrosive or extreme applications
- Electric start options
- Camlock couplings

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.