

ALPHA

3476UFP160P67

EAN 4031582305005

Swivel castor with central total lock, housing made of pressed steel, bright zinc plated, blue passivated, double ball bearing swivel head, wheel axle with nut, dustguard, plate fitting with integrated central lock. Wheel centre made of Polyamide, Tread: elastic-tyre, non-marking, precision ball bearing

Hint: The brake pedal is attached to the mounting plate. The swivel mechanism is independent of the mounting plate. Therefore the break pedal is always in the same position.



BETTER MOBILITY. BETTER LIFE.




Picture may differ from original product


Technical Data

Wheel diameter	160 mm
Width of Tread	46 mm
Size of Plate	175 x 112 mm
Plate hole centres	105 x 77,5 mm
Plate hole	13 mm
Offset	55 mm
Swivel Interference	270 mm
Overall height	200 mm
Temperature	- 20 / + 80 °C
Standard	EN 12532
Weight	2.924 kg
Swivel Radius	135 mm
Hardness of tread	Shore A 63
Load capacity	250 kg
Load capacity (static)	500 kg

Dimensions

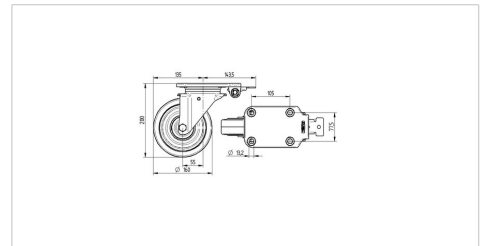

Structure & Mounting

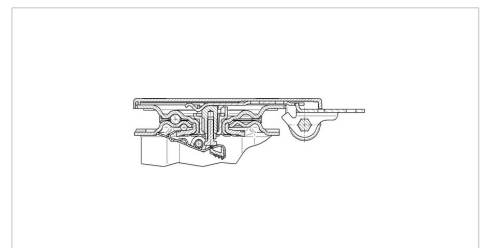

Advantages at a glance

Roll performance	● ● ● ○ ○
Movement noise	● ● ● ● ●
Attrition	● ● ● ○ ○
Corrosion resistance	● ● ● ○ ○

ALPHA

3476UFP160P67

EAN 4031582305005



BETTER MOBILITY. BETTER LIFE.

Structure & Mounting

