

Model: LE08SN25DNO


## Features

Stable performance, strong versatility and excellent anti-interference performance

## Technical Specifications

Mounting	Non-flush	Assured distance	$\leq \pm 10\%$
Sensing distance	2.5mm	Hysteresis range	1...20%
Assured Distance[Sa]	0...2mm	Repeat accuracy	$\leq 3\%$
Standard target	Fe 8*8*1t	Ambient Temperature	-25°C..70°C
Rectangular size	8*7.5*23mm	Ambient Humidity	35-95%RH
Output ways	NPN	Circuit protection	Short circuit protection, overload protection, reverse polarity protection
Output status	NO	Voltage Withstand	1000V/AC 50/60Hz 60S
Residual voltage	$\leq 2.5V$	Insulation Resistance	$\geq 50M\Omega(500VDC)$
Supply voltage	10...30VDC	Vibration Resistance	Complex amplitude 1.5mm 10...50Hz(X,Y,Z 2 hours at each direction)
Load Current	$\leq 100mA$	Degree of Protection	IP67
Current consumption	$\leq 10mA$	Housing Material	PC
Switching frequency	1000Hz	Connection Type	Cable
Output indicator	Red LED	Certification	CE

## Dimensions

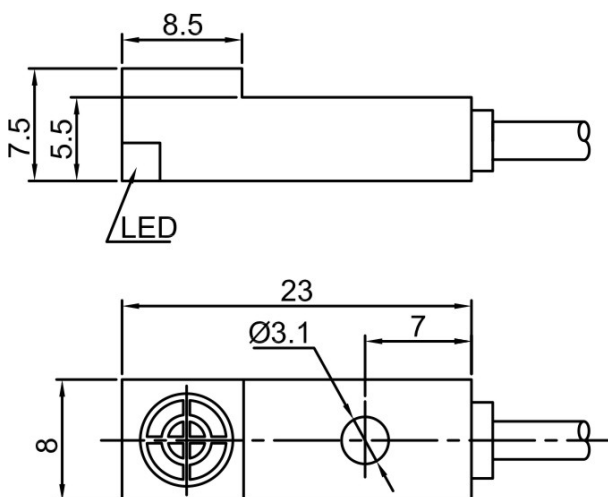

## Wiring Diagram

