

Ideal for Vertical and Overhead Glazing!



GL 850DC

KSF-Model	GL-550	GL-700	GL-850
Max. Load capacity	300 KG	300 KG	300 KG
Basic height	2.15 m	2.15 m	2.15 m
Lifting height	5.5 m	7 m	8.5 m
Weight	226 KG	247 KG	268 KG



The JDPower GL Lifter is a compact and versatile material lifter for construction sites and workshops - also ideal for vertical and overhead glazing with optional accessories.


Each JDPower GL lifter in the series comes in two models - an AC version run from mains power, or a DC version with battery for sites where mains power is not available.



GL-850DC with standard forks supplied with each model



GL-850DC with front legs retracted

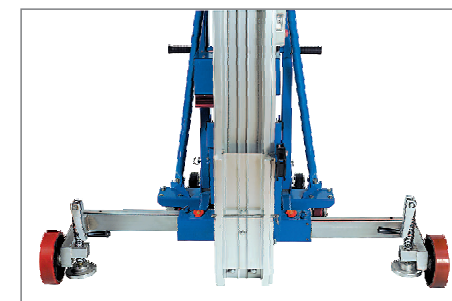


GL-850DC with front legs extended



The cable is protected near the motor-housing for safe transportation. Safe lifting point indicated.



The GL series can be operated on uneven or sloping surfaces. Spirit levels, a variable wheel-base and jacks level and correct setup.

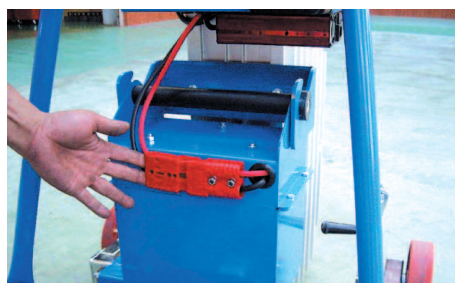

The battery on DC units is protected by a steel housing and is easily connected with a plug.



Easy access to counter weight bay.



Steel pulleys are used for durability. Pulleys are ringed to ensure operator safety.



Steel cable is fed through rollers.



Optional radio remote control with emergency stop.




Each unit comes standard with a 5 meter cable remote control.



The GL series can be transported vertical or horizontal.


Universal Crane Arm - Standard with each unit



©GL- U (Part #3017013) Universal Crane Arm


- ◆ Universal Crane arm with hook
- ◆ Patented design: universal swivel action for high manoeuvrability.
- ◆ Retracts and folds.
- ◆ Loading capacity: 300 kg
- ◆ Operating range: 300 - 600 mm
- ◆ Weight 18 kg

Optional Accessories - Glass Holders

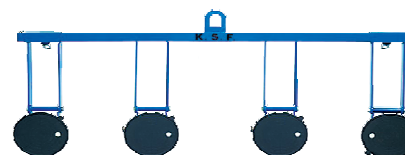

©GL- 3 V (Part #3017012) Hanging cradle (optional) - Vertical Glazing

- ◆ Loading capacity: 165 kg.
- ◆ 3 Vacuum cups with flexible angle control.
- ◆ Easily lift glass vertically from the ground or from walls.
- ◆ Weight: 18 kg
- ◆ Dimensions: 1450 x 537 mm

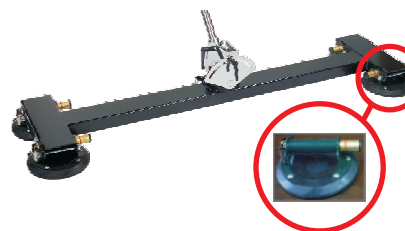

©GL 4 V (Part #3017011) Universal cradle (optional) - Horizontal or Vertical Glazing

- ◆ Load capacity: 180 kg.
- ◆ Multiple degrees of freedom - angle the cradle in any position.
- ◆ 4 Vacuum cups.
- ◆ Weight: 27 kg.

1. **Quick Folding Base:** Easy and convenient setup. Can be setup in 10 seconds by a single operator.
2. **Adjustable Legs with level:** Ensures the unit can be safely setup on uneven surfaces. up on a slope to accomplish the level set up.
3. **Available with AC or DC motors:**
 - **DC Motor (DC series):** Operates without mains power via battery. Comes with charger and radio remote control.
 - **AC Motor (AC series):** Operates from mains power. Radio remote control optional.
4. **Radio remote control:** Comes standard with DC units, optional extra with AC units.
5. **Safety Limiter:** If the operator attempts to continue to raise the unit above its maximum operating height, a kill switch will engage. The operator is then required to reset the kill switch with the controller.
6. **Safety Anti-Fall system on mast.**
7. **10" Heavy duty castors** Make it easy to manoeuvre the GL lifter on-site.