

ALPHA

3470IDG100P62

EAN ...

Swivel castor, housing made of pressed steel, bright zinc plated, blue passivated, double ball bearing swivel head, wheel axle with nut, dustguard, plate fitting. Wheel centre made of Aluminium, Tread: heat resisting silicone rubber, damping, self-lubricating bushing




BETTER MOBILITY. BETTER LIFE.



Technical Data

| | |
|------------------------|-----------------|
| Wheel diameter | 100 mm |
| Width of Tread | 30 mm |
| Size of Plate | 105 x 85 mm |
| Plate hole centres | 80/77 x 60 mm |
| Plate hole | 9 mm |
| Offset | 40 mm |
| Swivel Interference | 180 mm |
| Overall height | 128 mm |
| Temperature | - 30 / + 250 °C |
| Standard | EN 12532 |
| Weight | 0.821 kg |
| Swivel Radius | 90 mm |
| Hardness of tread | Shore A 75 |
| Load capacity | 80 kg |
| Load capacity (static) | 160 kg |

Dimensions

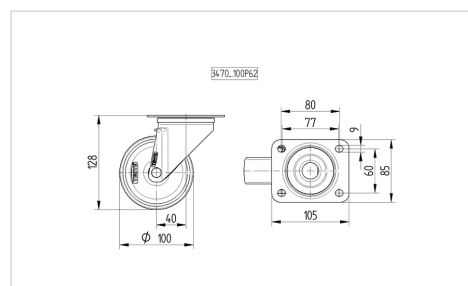

Advantages at a glance

| | |
|----------------------|-----------|
| Roll performance | ● ● ● ○ ○ |
| Movement noise | ● ● ● ○ ○ |
| Attrition | ● ● ● ○ ○ |
| Corrosion resistance | ● ● ● ● ● |