



Specifications – General

- **Certification:** CCC, CE, FCC, ISO9001, BIS
- **Cooling System:** Fan cooling
- **Display Sizes:** 21.5", 32"
- **Enclosure Front Bezel:** Aluminum
- **Back Housing:** Cold-rolled steel plate
- **Mounting:** Default wall-mounting bracket
- **OS Support:** Microsoft® Windows 11/10 (64-bit)
 - Default: Windows 10/11 English Professional Trial Version
- **Optional Colors:** Silver, Black, White

Specifications – Physical

- Weight (Net): Pending
- Weight (Gross): Pending
- Package Size: Pending

System Hardware

- CPU: Intel® Core® i3 / i5 / i7
- Memory: 8GB / 16GB / 32GB DDR4
- Storage: 128GB / 256GB / 512GB / 1TB / 2TB SSD
- Expansion Slots: Full-size Mini PCI-E
- LAN: 100 Base-T x 1

I/O Ports

- Power: x 1
- HDMI: x 1
- VGA: x 1
- USB: x 4
- LAN (RJ-45): x 1
- Audio Input: x 1
- Audio Output: x 1
- Other: Customized interface available


10 POINT SENSITIVE TOUCH

Sensitive multiple touch, Support multiple gestures, Easy to reach



SUPPORT MULTIPLE INFORMATION CHECKING SYSTEM

Floor guide, System management, Information query, Traffic query, etc.

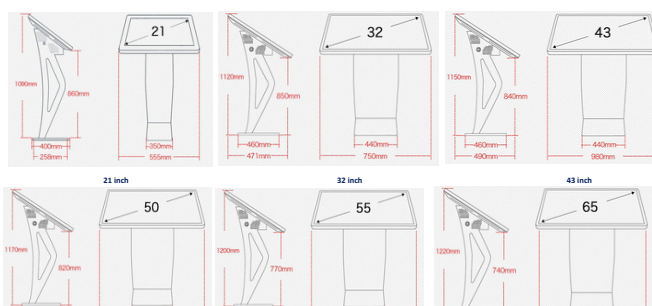

Features

- **IPS LCD Sizes:** 21.5", 23.6", 27", 32", 43", 50", 55", 65"
 - 50K lifetime LED backlight
- **Operating System:** Android 11.0 with RK3566 / RK3568 / RK3588 processors
 - Memory up to 8GB ROM and 128GB RAM
- **Processor Options:** Intel® Core® i3 / i5 / i7 (latest generation)
 - Memory up to 32GB DDR4 SDRAM, 1TB SSD
- **Wide Operating Temperature:** -10°C ~ 50°C
- **Front Panel Protection:** IP65 certified
- **Touch Screen:** 10-point capacitive G+G

LCD Display

- Display Type: IPS LCD screen
- Display Size: Pending
- Resolution: 1920 x 1080 / 3840 x 2160
- Max Colors: 16.7M
- Luminance: 450 cd/m²
- Viewing Angle (H/V): 178° / 178°
- Backlight Life: 50,000 hrs
- Contrast Ratio: 3000:1
- Aspect Ratio: 16:9
- Touch Lifespan: 36 million touches at single point
- Touch Type: 10-point capacitive G+G touch screen
- Response Time: ≤ 5 ms

Environment

- Humidity: 10~95% RH @ 40°C, non-condensing
- Ingress Protection: Front panel IP65
- Operating Temperature: -10°C ~ 50°C
- Storage Temperature: -30°C ~ 70°C

Accessories

- Adaptor (DC 12~19V) with 1m cable
- Power plug with 1.2m cable
- K-type bracket

