






## Accessories // Adapter sleeves // Measuring inserts




Accessories	Order code
<b>Adapter sleeve (including one drilling)</b>	Calibrators with dry block function According configuration
<b>More drillings</b>	Custom According configuration
<b>Black body sleeve for calibration of infrared thermometers</b>	Ø 60 x 150mm and Ø 60 x 170mm EZ15060B03AL41IR
<b>Tub insert for micro calibration bath</b>	Ø 60 x 170 mm EZTPMBEKO00000
<b>Adapter sleeve for surface temperature sensors</b>	Calibrators with block dimensions 170 mm (depth) EZ20460B03AL050F

## Accessories // Adapter sleeves // Standard configuration

Series	TP M / TP 3M	TP 17	TP 17 / TP 37 / TP 38	
Dimensions	Ø 60 mm	Ø 60 mm	Ø 28 mm	
Material	Aluminium	Brass* / Aluminium	Brass	
Drillings	Order code			
1x 3.5 mm (1/8 in) 1x 6.5 mm (1/4 in)	EZ16360B02AL69	EZ15060B02MS27 / <a href="#">EZ15060D02AL18</a>	EZ15028H02MS01	
1x 3.5 mm (1/8 in) 1x 6.5 mm (1/4 in) 1x 13.5 mm (1/2 in)	EZ16360B03AL19	EZ15060I03MS53 / <a href="#">EZ15060D03AL54</a>	EZ15028B03MS17	
1x 3.5 mm (1/8 in) 1x 5.0 mm (3/16 in) 1x 6.5 mm (1/4 in) 1x 9.5 mm (5/8 in)	EZ16360C04AL46	EZ15060D04MS55 / <a href="#">EZ15060D04AL17</a>	EZ15028G04MS44	
1x 3.5 mm (1/8 in) 6x 6.5 mm (1/4 in)	EZ16360C07AL44	EZ15060D07MS56 / <a href="#">EZ15060D07AL14</a>	EZ15028D07MS22	
1x 3.5 mm (1/8 in) 2x 5.0 mm (3/16 in) 2x 6.5 mm (1/4 in) 2x 9.5 mm (5/8 in)	EZ16360C07AL45	EZ15060D07MS57 / <a href="#">EZ15060D07AL15</a>	EZ15028G07MS43	
No drilling	EZ16360000AL00	EZ15060B00MS06 / <a href="#">EZ15060B00AL00</a>	EZ15028000MS00	

\* Only for TP 17450

## Accessories // Certificates // Recalibration

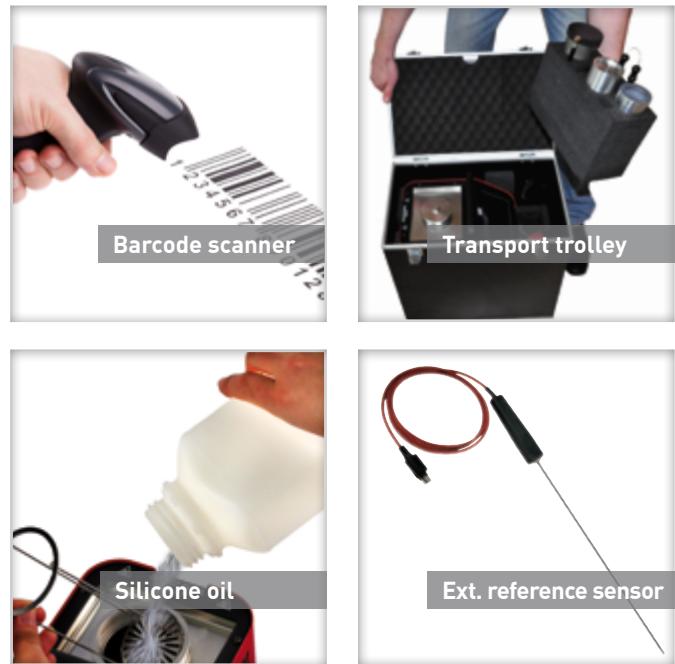

Certificates	Order code
SIKA-Works calibration certificate 1st function	EKTPWP1FKT
SIKA-Works calibration certificate 2nd function	EKTPWP2FKT
SIKA-Works calibration certificate 3rd function	EKTPWP3FKT
SIKA-Works calibration certificate 4th function	EKTPWP4FKT
DAkkS calibration certificate 1st function	EKTPDAKK1FKT
DAkkS calibration certificate 2nd function	EKTPDAKK2FKT
DAkkS calibration certificate 3rd function	EKTPDAKK3FKT
DAkkS calibration certificate 4th function	EKTPDAKK4FKT
Additional test point DAkkS-Certificate	EKTPDAKKSZUSP
SIKA-Works calibration certificate for calibrator and measuring inputs	EKTPWPMINST
DAkkS-Certificate for calibrator and measuring inputs	EKTPDAKKSMINST

Recalibration	Order code
Document of pre-adjustment values (block) re-calibration (each function)	EKTPEW
Adjustment (block) re-calibration (each function)	EKTPJUSTAGE
Adjustment TT Scan and adjustment internal measuring instrument	EKTPJUSTAGESCAN

Accessories	For type	Order code
<b>Transport</b>		
Transport case	TP 17650	EZTPKOFFER002
	TP 17450, TPM 255	EZTPKOFFER003
	TP 17165, TP 17200, TP37 165, TP 37200	EZTPKOFFER004
	TP M165, TP 17166, TP 3M165	EZTPKOFFER005
	TP 37700	EZTPKOFFER006
	TP 18200	EZ999999990001
	TP 281300	EZ999999990006
	TP 18850	EZ999999990005
Transport case with trolley attachment frame	TP 17650	EZTPKOFFER002TG
	TP 17450, TPM 255	EZTPKOFFER003TG
	TP 17165, TP 17200, TP37 165, TP 37200	EZTPKOFFER004TG
	TP M165, TP 17166, TP 3M165	EZTPKOFFER005TG
	TP 37700	EZTPKOFFER006TG
Transport bag	TP 17000	XE2193
<b>PC</b>		
PC software (without TT-Scan)	TP 17200S, TP 17165S, TP 17166S, TP M165S, TP M255S, TP 17450S, TP 17650S, TP 281300E	EZ999999999971
PC software (with TT-Scan)	TP 17200S, TP 17165S, TP 17166S, TP M165S, TP M255S, TP 17450S, TP 17650S, TP 281300E	EZ380000000001
Converter RS485 to USB	TP 17200S, TP 17165S, TP 17166S, TP M165S, TP M255S, TP 17450S, TP 17650S, TP 281300E, TP 38165, TP38650	EZ170000000002
Converter RS232 to USB	TP 38165, TP 38650	EZ380000000002
Network switch	TP 37200, TP 37165, TP 3M165, TP 3M255	XE2103
Barcode scanner	TP 37200, TP 37165, TP 3M165, TP 3M255	XE2102
Wifi router	TP 37200, TP 37165, TP 3M165, TP 3M255	XE2101
<b>Calibration</b>		
Tripod	TP M165, TP M255	EZTPMSG0000000
Calibration liquid - Silicone oil 50 cSt (50...270 °C)	Calibrators with micro calibration bath function	EZSÖ0500000000
Calibration liquid - Silicone oil 20 cSt (7...220 °C)	Calibrators with micro calibration bath function	EZSÖ0200000000
Calibration liquid - Silicone oil 10 cSt (-35...155 °C)	Calibrators with micro calibration bath function	EZSÖ0100000000
Calibration liquid (Silicone oil), 5 cSt (-40...123°C)	Calibrators with micro calibration bath function	EZSÖ0050000000
Ext. reference sensor TFEE 255-3-300 (-55...255 °C)	TP 38165	W033P413000XX002
Ext. reference sensor TFEE 650-3-300 (-35...650 °C)	TP 38650	W034P413000XX002
Ext. reference sensor TF 255-3-300 (-55...255 °C)	TP 37200, TP 37165, TP 3M165, TP 3M255	W033P413000GX002
Customised linearisation TFEE	TP 38165, TP 38650	EKTFE-LIN0000

## Accessories // Measuring instrument // TT-Scan



**Scanner unit TT-Scan**

### Properties

#### Possibilities to connect

	RTD 4-Wire	RTD 3-Wire	RTD 2-Wire	TC	mA	Switch
1	1	2	2	2	2	2
2	2	3	3	3	3	3
3	3	4	4			
4						

#### Version

Scanner device with precision measuring instrument

#### Measuring inputs

Switchable

For up to 8 sensors

Sensor type free configurable

#### General data

**Power supply** 230 VAC ±10 %, 50/60 Hz via adapter

**Power consumption** Approx. 10 W

**Dimensions (D x W x H)** 200 x 140 + 40 x 380 mm 7.87 x 5.51 + 1.57 x 14.96 in

**Weight** Approx. 2.5 kg Approx. 5.51 lbs

#### Equipment features

32 x 4 mm/1.26 x 0.16 in connections free of thermal voltage

Connection for external calibration reference sensor

External cold junction available

Serial USB data interface, incl. USB data cable

#### Options

Aluminium transport case, test & calibration software, DAkkS certificate, SIKA works certificate, external calibration reference sensors

# Accessories // Measuring instrument // TT-Scan // Measuring inputs

	Version	Measuring range		Tolerance	
<b>Resistance thermometer EN 60751</b>					
Pt100	2-, 3-, 4-wire	-90.00 °C...850.00 °C	-130.00 °F...1562.0 °F	±0.005 % full scale ±0.01 °C	±0.005 % full scale ±0.02 °F
Pt500					
Pt1000					
Connection possibility through 4 mm connections free of thermal voltage					
<b>Thermocouples according to DIN EN 60584 / DIN 43710</b>					
Type K	NiCr-NiAl	-90.00...999.99 °C 1000.0...1370.0 °C	-130.00...1831.9 °F 1832.0...2498.0 °F	±0.007 % full scale ±0.01 °C ±0.005 % full scale ±0.1 °C	±0.007 % full scale ±0.02 °F ±0.005 % full scale ±0.18 °F
Type J	FeCu-Ni	-90.00...900.00 °C	-130.00...1652.0 °F	±0.005 % full scale ±0.01 °C	±0.005 % full scale ±0.02 °F
Type N	NiCrSi - NiSiMg	-90.00...999.99 °C 1000.0...1370.0 °C	-130.00...1831.98 °F 1832.0...2498.0 °F	±0.007 % full scale ±0.01 °C ±0.005 % full scale ±0.1 °C	±0.007 % full scale ±0.02 °F ±0.005 % full scale ±0.18 °F
Type E	NiCr-CuNi	-90.00...700.00 °C	-130.00...1292.0 °F	±0.005 % full scale ±0.01 °C	±0.005 % full scale ±0.02 °F
Type R	Pt13Rh – Pt	0.00...999.99 °C 1000.0...1760.0 °C	32.00...1831.9 °F 1832.0...3200.0 °F	±0.05 % full scale ±0.01 °C ±0.03 % full scale ±0.1 °C	±0.05 % full scale ±0.02 °F ±0.03 % full scale ±0.18 °F
Type T	Cu-CuNi	-90.00...400.00 °C	-90.00...400.00 °F	±0.01 % full scale ±0.01 °C	±0.01 % full scale ±0.02 °F
Type B	Pt30Rh-Pt6Rh	0.00...999.99 °C 1000.0...1820.0 °C	32.00...1831.98 °F 1832.0...3308.0 °F	±0.05 % full scale ±0.01 °C ±0.03 % full scale ±0.1 °C	±0.05 % full scale ±0.02 °F ±0.03 % full scale ±0.18 °F
Type S	Pt10Rh-Pt	0.00...999.99 °C 1000.0...1760.0 °C	32.00...1831.98 °F 1832.0...3200.0 °F	±0.05 % full scale ±0.01 °C ±0.03 % full scale ±0.1 °C	±0.05 % full scale ±0.02 °F ±0.03 % full scale ±0.18 °F
Type L	Fe-CuNi	-90.00...900.00 °C	-130.00...1652.0 °F	±0.005 % full scale ±0.01 °C	±0.005 % full scale ±0.02 °F
Type U	Cu-CuNi	90.00...600.00 °C	194.00...1112.0 °F	±0.01 % full scale ±0.01 °C	±0.01 % full scale ±0.02 °F
Automatic comparison point compensation between 0 °C/32 °F and 60 °C/140 °F					
Accuracy of the comparison point Pt100 DIN class A					
Possibility of connection through 4 mm/0.16 in connections free of thermal voltage					
<b>Standard signal input</b>					
Current (switchable)	mA	0(4)...20 mA		±0.015 % full scale ±0.01 mA	
Transmitter supply 24 VDC, I <sub>max</sub> = 30 mA,					
Possibility of connection through 4 mm/0.16 in connections free of thermal voltage					
<b>Temperature switch</b>					
Automatic detection of an edge change, determining the hysteresis,					
Independent detection normally closed / normally open					
Potential-free input contacts (U <sub>max</sub> = 5 V, I <sub>max</sub> = 1 mA)					
Possibility of connection through 4 mm/0.16 in connections free of thermal voltage					
<b>Calibration reference sensor connection</b>					
Pt100	4-wire	-90.00...850.00 °C	-90.00...850.00 °F	±0.005 % full scale ±0.01 °C	±0.005 % full scale ±0.02 °F
Polynomial correctable through internal parameters or through external EEPROM inside the sensor					
Possibility of connection through 7-pin built-in socket					
<b>Multi channel measuring instrument</b>				<b>Order code</b>	
8-channel measuring instrument				ET3849U0308003	
SIKA-Works calibration certificate measuring inputs				EKTTSCAN00000W	
DAkkS-Certificate measuring inputs				EKTTSCAN00000D	
PC-Software (Block + measuring inputs)				EZ380000000001	
Reference sensor TFEE 255-3-300 (-55...255 °C)				W033P413000XX002	
Reference sensor TFEE 650-3-300 (-35...650 °C)				W034P413000XX002	
Sensor specific linearization TFEE				EKTfee-LIN0000	
SIKA-Works certificate TF or TFEE				EKTmk0000000W	
DAkkS-Certificate for TF or TFEE (-30...500°C)				EKTmk0000000D	

