

# LIFEGUARD

power distribution system

## LIFEGUARD TEMPORARY PROTECTED LIGHTING


### TEMPORARY PROTECTED LIGHTING (TPL®)

- Rough Service with watertight IP68 lens rating
- Designed for indoor and outdoor applications
- Daisy chain up to 250m
- Can be manufactured to end user's specifications
- AS/NZ 60598.2.20 compliant
- Highly impact resistant polycarbonate lens
- Custom lengths available
- Serviceable


Manufactured for use in Mining, Building and Construction, Shows and Events, Military, Shipbuilding and Salvage.

### SPECIFICATIONS

Lamp	10W LED each
IP Rating	68 (@ 1.5m)
Connection	10A or 15A fl at pin, 16A IEC
Voltage	220V-240V AC (double insulated)
Cable	2.5mm <sup>2</sup> - 2C+E Flat tinned copper flex
Lens	Polycarbonate
Length	12.5m or 25m

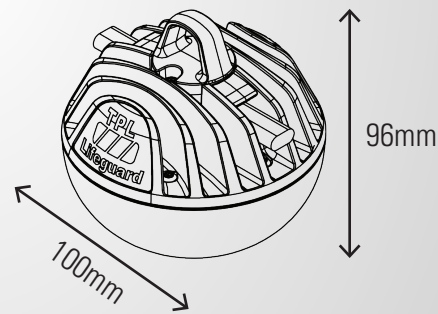

Part Number	Length	Plug	Lamps	Watts	Voltage	Wire
LG15TPL2510A	25m	10A	10x LED	100	220-240V AC	2.5mm <sup>2</sup>
LG15TPL12.510A	12.5m	10A	5x LED	50	220-240V AC	2.5mm <sup>2</sup>
LG15TPL2516A	25m	16A	10x LED	100	220-240V AC	2.5mm <sup>2</sup>
LG15TPL12.516A	12.5m	16A	5x LED	50	220-240V AC	2.5mm <sup>2</sup>

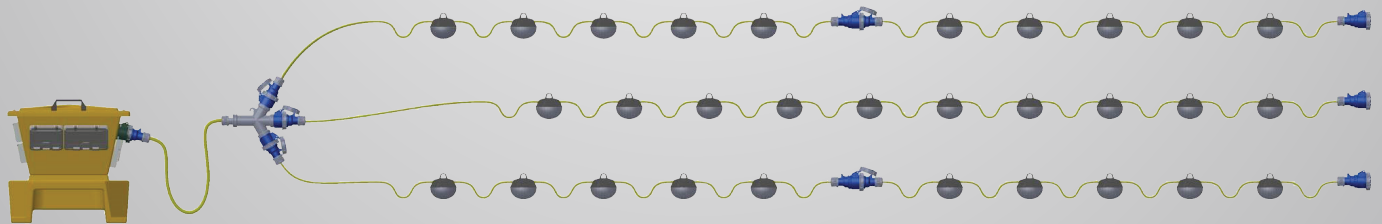

For all your Temporary or Permanent Power Needs



Spinefex

p: 07 3202 7383 | [www.spinefex.com.au](http://www.spinefex.com.au) | 1/42 Clinker Street, Darra 4076