


specifications

TME1000N-A Series

ActiveCore Series, 2 Door (Glass), Upright Fridge

Project: _____

Item No: _____

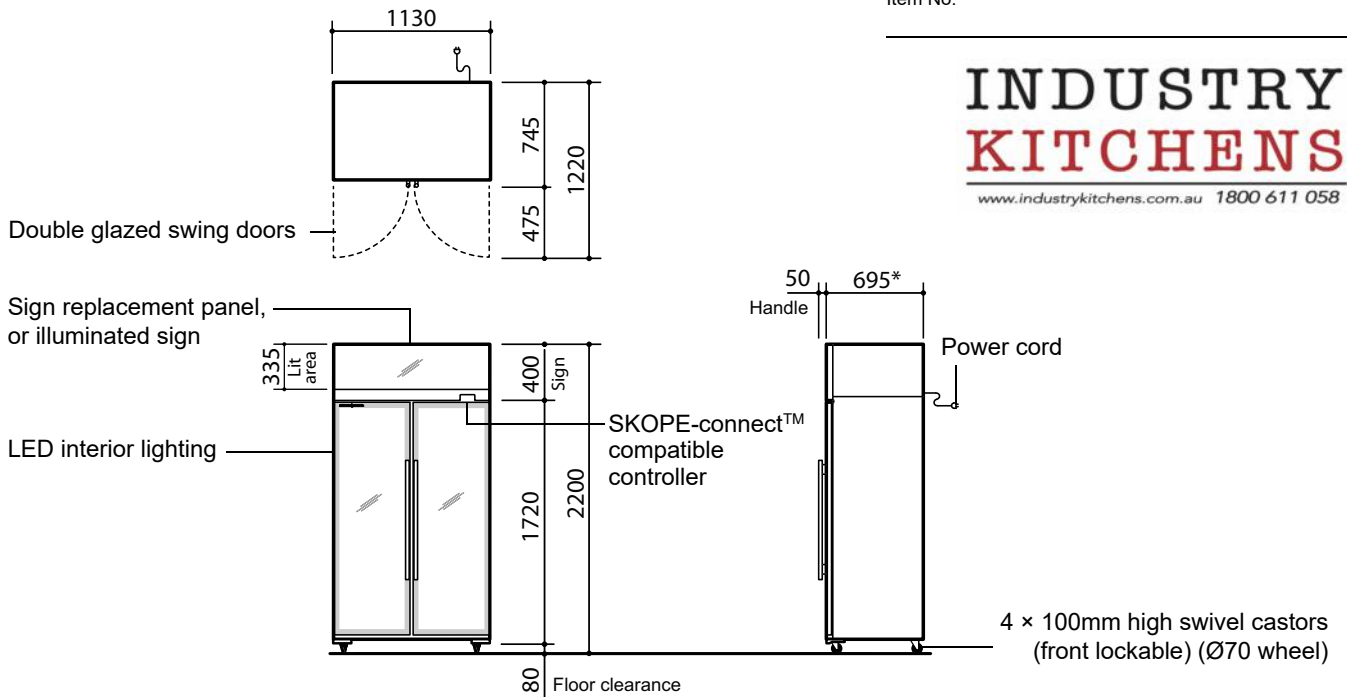

**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058

CABINET	
Model ID	TME1000N-A TME1000N-AC
Doors	2 × self-closing, double glazed, single Low-E, lockable, argon filled, toughened safety glass swing doors (hinged LH, RH)
Internal door opening	2 × door openings: 1570mm high × 450mm wide
Shelves	5 × adjustable height wire shelves: 1015mm wide × 470mm deep 10 × adjustable height wire shelves: 500mm wide × 470mm deep
Sign	Sign replacement panel Illuminated sign
Material	Powdercoat galvanized steel
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	M1 M1
GEMS energy consumption	3.79 kWh/24h 3.97 kWh/24h
GEMS annual running cost	\$415 p.a. (@ \$0.30/kWh) \$435 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior side lighting	2 × 1400mm, 15W LED 2 × 1400mm, 15W LED
Sign lighting	n.a. 1 × 1060mm, 12W LED
Power cord	Supplied with 2.3m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.0 Amps (includes unit 2.6 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-0010)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	165 Watts/235 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	2200mm	1570mm
Width	1130mm	1030mm
Depth	745mm	554mm
Floor area	0.84m ²	
Weight	225kg	
Gross volume	980L	

* Depth 695mm excludes removable door handle and door lock bracket

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2018 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0518 Rev. 2.8 Jul. 2020

