



Ex MORO

CONVEYOR / WALKWAY LIGHT



- + High luminous efficacy, up to 150lm/W
- + Low profile and compact design
- + Heavy duty anodised die-cast aluminum; anti-corrosive, long lasting and durable
- + Vibration and impact resistant
- + Suitable for hazardous locations

Certifications & Compliance

- + Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group F, G
Class III, Division 1
Simultaneous Presence
UL 1598A Marine Outside Type
UL 1598 Wet Locations
UL 844 Hazardous Locations
UL 8750 LED Safety
CSA C22.2 No. 250.0-08,250.13

Application

- Marine Loading Terminals
- Chemical Processing Facility
- Manufacturing Plant
- Petrol Station




Electrical Parameters

MODEL (ETG)	ETG-EXMORO45	ETG-EXMORO65
Power (W)	45	65
Lumen (lm)	6750	9750
Luminous Efficacy (Lm/W)	150	
Voltage	AC100-240/277V, 200-480V	
Ambient Temp	-40°C ~ +60°C	
CCT & CRI	5000K Ra>70	
Mounting Options	Ceiling mount, wall mount(25° or 90°), pole mount(25° or 90°), adjustable bracket, adjustable pipe clamp, hanging pole	
Gand's Spec	NPT3/4", NPT1-1/4, NPT1-1/2"	
Lens	Tempered Glass	
Beam Angle	110°	
Weight (kg)	4.2kg	
Dimensions (mm) (LWH)	Φ260×150 mm	
Warranty	5 Years (50,000 hours @L70)	




Mounting Options


Pendant




Ceiling mount




Brackets




Stanchion 25°




Stanchion 90°




Wall 25°



Wall 90°



Photometric

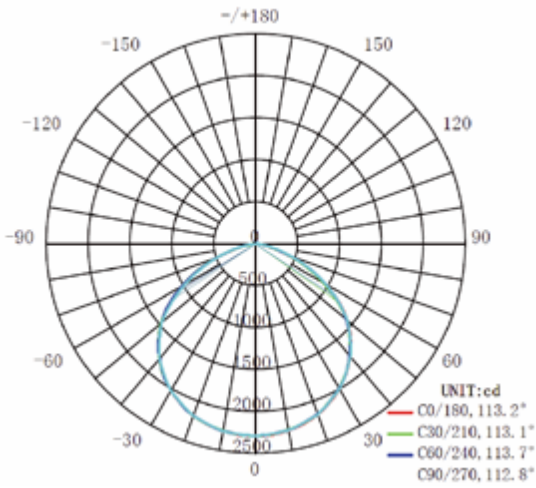

AVERAGE BEAM ANGLE(50%):113.2 DEG