


specifications

RF7.UPR.2.SD

ReFlex Series, 2 Door (Solid), Upright Fridge

**INDUSTRY
KITCHENS**

www.industrykitchens.com.au 1800 611 058

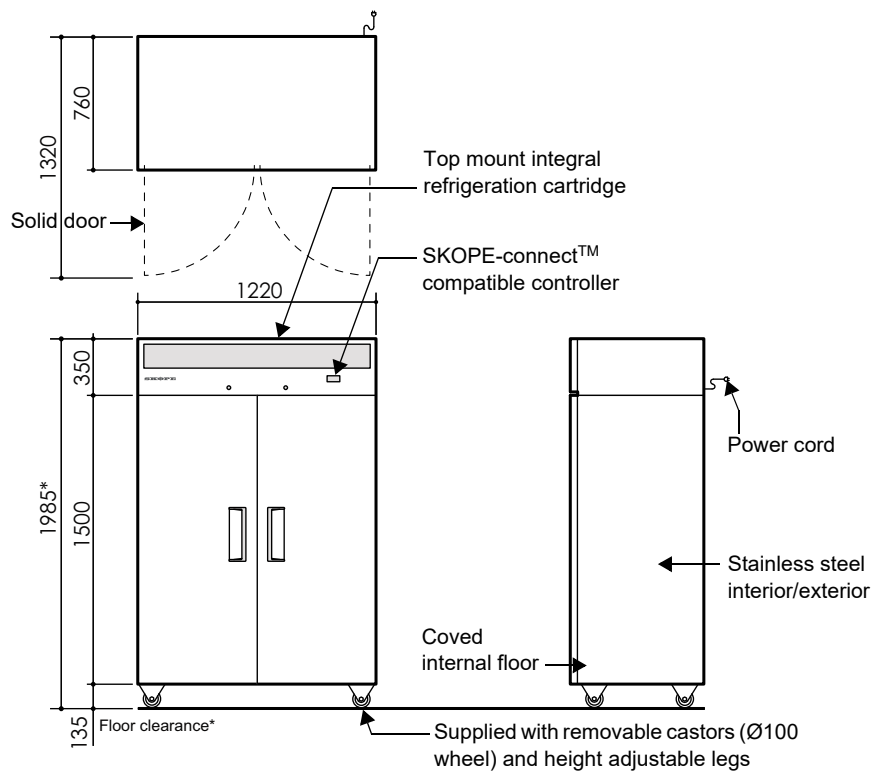

CABINET	
Model ID	RF7.UPR.2.SD
SKOPE ID	RF7UPR2-SCTP-SD
Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 1375mm high × 495mm wide
Shelves	10 × adjustable height shelves: 530mm wide × 530mm deep
Worktop	n.a.
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	-1°C to 5°C
ELECTRICAL	
Climate class	5 (40°C/40% RH)
Interior lighting	2 × 1200mm, 12W LED light (door activated)
Power cord	Supplied with 2.9m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.5 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Top mounted, integral, removable refrigeration cartridge (part number UTKCNI-0018)
Refrigerant	R290 / 90g (natural refrigerant)
Nominal capacity	650 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	1985mm*	1395mm
Width	1220mm	1100mm
Depth	760mm	640mm
Floor area	0.93m ²	
Weight	159kg	
Internal volume	982 litres	

* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	300mm
Sides	Not required
Back	Not required
Bottom	Not required