

Multi Knee Operated Basin



Scan QR code
to view our
installation notes



HBMKO


Product Info:

- Users activate spouts by leaning against panels
- Made to custom lengths
- Supplied pre-plumbed ready for mounting
- Optional goose neck or low-level spouts
- No electrical connections or power required
- Wall brackets and 40mm wastes supplied
- One central water connection point with hot & cold mixing unit integral

To order this item please advise:

- Overall length
- Number of wash basins
- Spout type: goose neck or low-level

Low level Spout Shown
Optional Goosneck Available


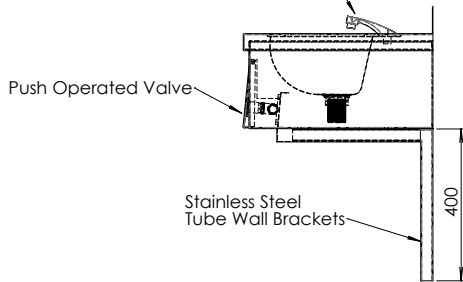


INSTALLATION NOTES

- 1) Fixture strength is ultimately determined by the load capacity of the supporting structure (noggins recommended for stud wall construction) and use of appropriate fixings (i.e. sleeve anchors for masonry walls).
- 2) Basin unit is secured to wall with heavy duty stainless tube wall brackets fixed to underside of unit.
- 3) Unit supplied pre-plumbed with 1/2" BSP hot and cold connections on mixing unit at the centre/rear of the fixture with integrated PLV.
- 4) Water connections to mixing unit: Min = 250kPa.
- 5) Front support legs supplied only by specific request.
- 6) Suggested mounting height 850-900mm FFL to basin rim.

Standard Basin Sizes:

1200mm - 2 bowls	2400mm - 4 bowls	3600mm - 6 bowls
1800mm - 3 bowls	3000mm - 5 bowls	4200mm - 7 bowls

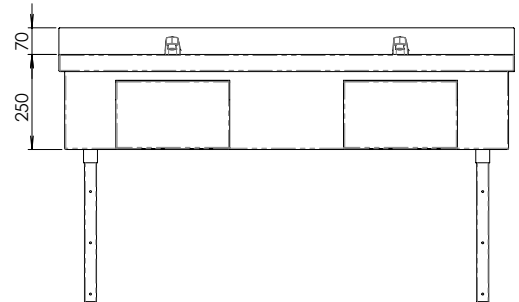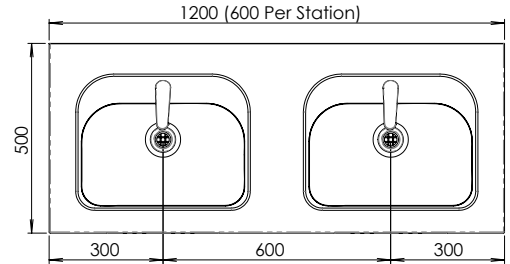

Suggested mounting height: 850-900mm AFL