

SPN1016S Semi - electric Stacker

- 1000kg Capacity; Max Lifting Height 1600mm
- · Walk-behind operate no license required
- Safe, reliable, sustainable and low maintenance

CE



JIALIFT Semi-electric Walkie Stacker (straddle leg) (1T/1600mm)

With electric lift and manual push, SPN-S series semi-electric pallet stacker is easy to control, and environmental efficiency, which is widely used in overhead cargo and pallet moving and stacking. Using SPN is safe and efficient in factories, warehouses, and logistics centres. While in some narrow passage, floors, and other high rack warehouses, using SPN-S is more flexible, silent and environmental. Straddle Legs Models suit on Standard Australian Pallet (CHEP). It offers a number of **advantages**:

- Walk-behind operate no license required. Straddle Legs Models suit on
- Standard Australian Pallet (CHEP)
- Control Panel: Fascia-mounted control panel with raise/lower buttons, emergency stop trigger, battery indicator and hour-meter.
- The in-built charger is single phrase (wall plug) can be easily charged
- Adjustable Fork: Forged forks with an adjustable width. Easy service and maintenance
- Lockable wheel: Wheels: Brake-enabled with 360-degree rotation. Large diameter steered rear wheel for easy movement across any surface.

Standard Equipment:

Also Included in our Offer: Battery and Charger

Warranty: 5 Years refer to the JIALIFT warranty terms and conditions






JIALIFT AUSTRALIA PTY LTD Call Us: 1300 000 168 Email: sales@jialift.com.au 46-48 Geddes St, Mulgrave VIC 3170 Open at 8:30 am - 5:30 pm, Monday-Friday

ww.jialift.com.au



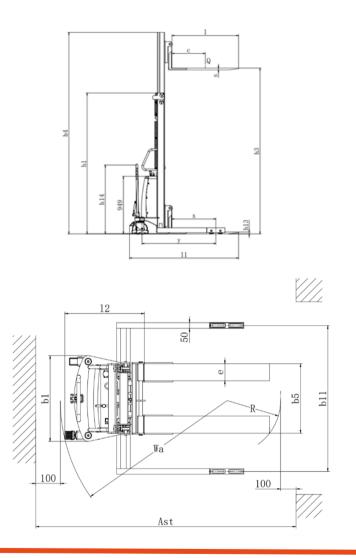



JIALIFT AUSTRALIA PTY LTD Call Us: 1300 000 168 Email: sales@jialift.com.au 46-48 Geddes St, Mulgrave VIC 3170 Open at 8:30 am - 5:30 pm, Monday-Friday

ww.jialift.com.au



| Distinguishi | ng mark | |
|---|---------|-----------|
| Model designation | | SPN1016S |
| Load capacity | kg | 1000 |
| Load capacity on max. Height | kg | 1000 |
| Max lifting height | mm | 1600 |
| Load center distance | mm | 600 |
| Weight | : | |
| Service weight | kg | 410 |
| Dimensio | ons | |
| Fork length | mm | 1150 |
| Single fork width | mm | 100 |
| Two forks outside width | mm | 210-830 |
| Lowered fork height | mm | 40 |
| Fixed leg length | mm | 1120 |
| Single fixed leg width | mm | 50 |
| Inner width of two fixed legs | mm | 1230 |
| Outside width of fixed legs | mm | 1330 |
| Turning radius | mm | 1350 |
| Aisle width for pallets 1200 $	imes$ 1200 crossways | mm | 2400 |
| Overall length | mm | 1800 |
| Overall width | mm | 1330 |
| Extended mast height | mm | 2080 |
| Lowered mast height | mm | 2080 |
| Types, Cha | assis | |
| Front wheel size, number | mm | 100x26, 4 |
| Rear wheel size, number | mm | 180x50, 2 |
| Electric-er | ngine | |
| Lift motor rating | kW | 1.5 |
| Lift motor | V | DC 12V |
| The charger | | 12V/20A |
| Battery voltage/nominal capacity | | 12V/120AH |





JIALIFT AUSTRALIA PTY LTD

Call Us: 1300 000 168 Email: sales@jialift.com.au 46-48 Geddes St, Mulgrave VIC 3170 Open at 8:30 am - 5:30 pm, Monday-Friday

ww.jialift.com.au