

2-Megapixel IR Night Vision Outdoor Dome PTZ Camera
















Features

- 2MP Progressive scan CMOS sensor
- 2.8~12mm motorized lens
- PTZ function support , Pan, Tilt, 4x Optical Zoom
- Provides True Day/Night functionality with automatic IR filter operation
- Extended IR range up to 60M (depends on scene IR reflectivity)
- Weather-proof IP66 rated
- Supports UTC function: Control camera OSD settings directly from DVR end

Dimensions

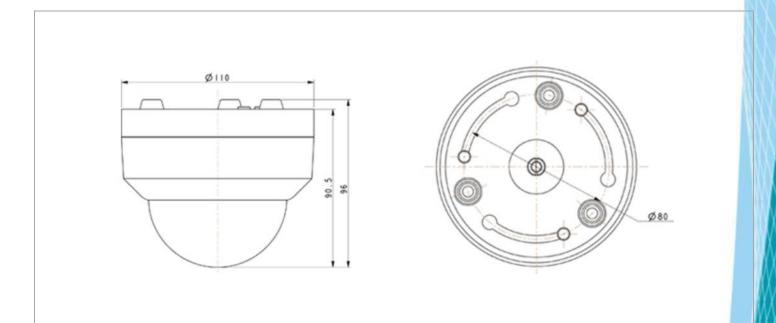

^{*}All images presented in this document are for example only. Product models may vary in different countries. Please visit EverFocus regional Websites for detailed ordering information.

^{*}Information contained in this document is subject to change without notice.

Specification

| Camera | |
|---------------------------|--------------------------------------|
| Image Sensor | 1/2.9" SONY 2.1MP CMOS Sensor |
| Imagine Resolution | 2MP |
| TV System | PAL/NTSC |
| S/N Ratio | >50db |
| PTZ | |
| Horizontal Rotation Speed | 20°/S |
| Horizontal Rotation Range | 0°~355° |
| Tilt Rotation Speed | 25°/s |
| Tilt Rotation Range | 0°~70° |
| Preset Points | 220 |
| Guard Tours | 8 groups |
| Guard Points Max. | Max.16 points |
| Lens | |
| Focus Length | 2.8mm-12mm |
| Focus Control | 4X Optical Zoom |
| Night Vision | |
| Infrared LED | ¢ 35x4PCS |
| IR Range | 60m |
| Day-night mode | AUTO |
| Interface | |
| Audio | No |
| Alarm | No |
| General | |
| Weatherproof | IP66 |
| Operating Temperature | Indoor: 0°~ +40° Outdoor: -40°~ +60° |
| Operating Humidity | ≤90% Non Condensing |
| Power | DC12V 2A |
| Lightning Protection | Transient voltage 6000V |
| Dimensions(Φ xH) | 110 x 96 mm |
| Weight | 1.1Kgs |

