

# RS | RM

Eye bolt | Eye nut


High-tensile Eye Bolt & Nut

100% electro-magnetic

Manufactured using  
forged, tempered steel




## Product features / RS Eye bolt / RM Eye nut

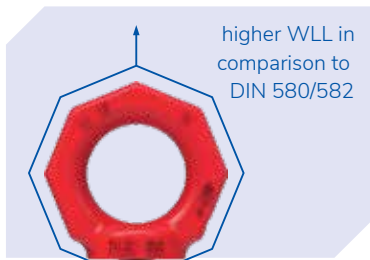

- ✓ High-tensile Eye Bolt & Nut
- ✓ Higher WLL than DIN 580 or BS Eye Bolt
- ✓ 100% electro-magnetic crack detection tested
- ✓ Manufactured using forged, tempered steel
- ✓ Can be used for both axial and angular loading
- ✓ Rated for use in both single-part and multi-part lifts
- ✓ Octagonal shape ensures quality class 8
- ✓ Metric coarse threads
- ✓ Also available in UNC thread sizes

TYPE	WLL [t]		A [RS]	A [RM]	B	C	D	E	T	M	WGT [RS] [kgs]	WGT [RM] [kgs]	Ref No. [RS]	Ref No. [RM]
	F1	F2												
RS/RM - M6	0.4	0.1	12	11	11	10	25	25	34	M6	0.1	0.1	61401	55254
RS/RM - M8	0.8	0.2	12	11	11	10	25	25	34	M8	0.1	0.1	61402	55255
RS/RM - M10	1	0.25	15	11	11	10	25	25	34	M10	0.1	0.1	56397	55258
RS/RM - M12	1.6	0.4	18	12	13	12	30	30	41	M12	0.18	0.16	56398	55271
RS/RM - M14	3	0.75	21	13	15	14	35	35	48	M14	0.3	0.26	56403	55281
RS/RM - M16	4	0.8	24	13	15	14	35	35	48	M16	0.3	0.26	56404	55460
RS/RM - M20	6	1.5	30	16	17	16	40	40	55	M20	0.47	0.4	56407	55343
RS/RM - M24	8	2	36	20	21	20	50	50	70	M24	0.88	0.7	56408	55394
RS/RM - M30	12	3	45	25	26	24	60	60	85	M30	1.62	1.32	56409	55438
RS/RM - M36	16	4	54	37	43	38	90	100	130	M36	6.5	5.8	56954	53093
RS/RM - M42	24	6	63	37	43	38	90	100	130	M42	6.5	5.5	56955	53095
RS/RM - M48	32	8	67	37	43	38	90	100	130	M48	6.5	5.3	56956	53098

Dimensions and specifications subject to change

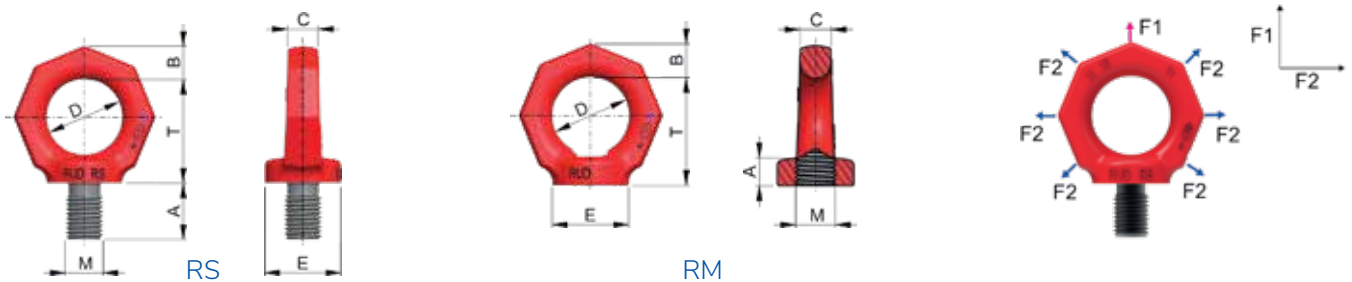

**Head Office**  
12 Commerce Place, Larapinta QLD 4110  
T: +61 7 3809 1300 F: +61 7 3809 1301

**WA Office: Perth**  
107 Broadway, Bassendean WA 6054  
T: +61 8 6278 1788 F: +61 8 6278 4788

E: sales@rud.com.au  
W: www.rud.com.au  
ABN: 74 010 547 949

