



ELEVATION SERIES CUBE ICE MAKER CIM1125

COAST ICE & COLD SOLUTIONS

Model:

□ CIM1125



CIM1125 ON B42

Features and Benefits

- 22.25" (565 mm) wide space-saving design.
- Produces up to 425 kg of ice per day.
- *Energy and Environment*
 - Exceeds new 2018 DOE (Department of Energy) regulations.
 - Up to 20% more energy efficient than other models.
 - Environmentally friendly, including BPA-free plastic and recyclable parts.
- *Sanitation*
 - Plastic Food Zone eliminates hard-to-clean nooks and crannies, allowing for effortless wipe down and easy, long-lasting sanitation.
 - Built in Agion® ensures unbeatable antimicrobial protection.
 - Smart LED light indicates machine status and when cleaning is required.
 - Simple, one-touch controls for sanitization and descaling.
 - BPA-free snap-in, snap-out dishwasher-safe components.
- *Universal Smart Harness™* control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

CIM1125 CUBE ICE MAKER

Ice Form

FULL CUBE DIMENSIONS	
W x D x H (mm)	22 x 22 x 22
HALF CUBE DIMENSIONS	
W x D x H (mm)	10 x 22 x 22



CUBE

Bin Chart *Kits for Combining Wider Bins with Smaller Models*

ICE STORAGE BINS										
Kits	Model No.	B25	ICB110SC	B40	B42	ICB180SC	B55	ICB230SC	CIB400	B110
	Capacity	110 kg	110 kg	156 kg	160 kg	180 kg	232 kg	232 kg	400 kg	388 kg
	Width	762 mm	560 mm	762 mm	559 mm	760 mm	762 mm	764 mm	1,220 mm	1,219 mm
	CIM1125	BT55	Kit Not Required	BT55	Kit Not Required	BT55			BT100	

*See Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

Options & Accessories

WATER FILTERS		
Ice Machine Model	Manifold	
	System	Replacement
CIM1125	CD2oB	CD2ooB

Note: All modular cube CIM units can be installed with manufacturer approved ozone delivery systems.

Ice Maker Warranty

COMMERCIAL WARRANTY	
Ice Maker	3 YEARS parts and labor
Evaporator and Compressor	5 YEARS parts






ELEVATION SERIES CUBE ICE MAKER CIM1125

COAST ICE & COLD SOLUTIONS

CIM1125 CUBE ICE MAKER

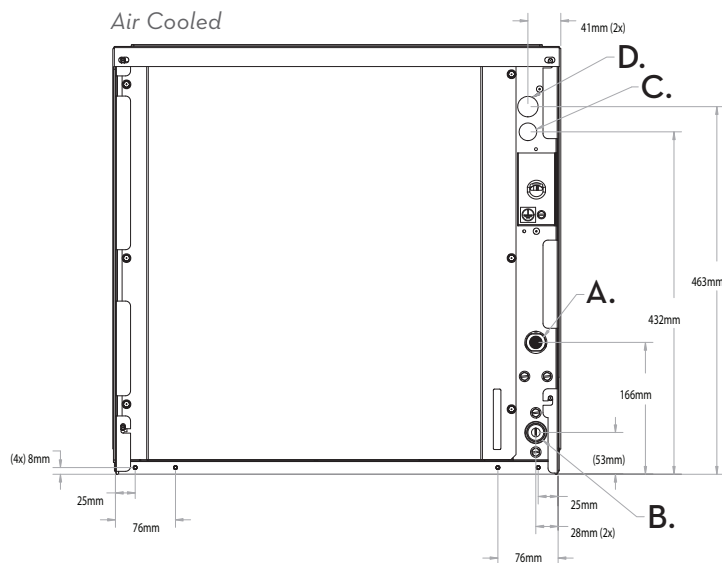


Air Cooled

Please note: air-cooled units require 152 mm clearance for air intake and exhaust.

- A. Ice maker potable water in, $\frac{3}{8}$ " FPT.
- B. Ice maker water out, $\frac{3}{4}$ " FPT.
- C. Hole for electrical connections, $\frac{7}{8}$ ".
- D. Electrical connection junction box, $\frac{7}{8}$ ".

Dual Exhaust for Installation Flexibility



Operating Requirements

	MINIMUM	MAXIMUM
		50Hz
Ambient Temp. Range Air	10 °C	43 °C
Water Temp.	4.4 °C	
Water Pressure	1.4 BAR	5.5 BAR

Dimensions

ALL MODELS	
W x D x H (mm)	565 x 616 x 683

Specifications

Model Number	Cond. Unit	Half-Cube Ice Production per 24hrs		Water Usage litres per 45 kg of Ice 32°C air/21°C water		kWH Used per 45 kg of ice @ 32°C air/ 21°C water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Refrigeration Capacity per hour
		21°C air/ 10°C water kg	32°C air/ 21°C water kg	Potable	Condenser					
CIM1125A	Air	425	374	68	N/A	5.2	220-240/50/1	13.5	20	5.657

* Daily ice production based on half cube configuration. When installing a CIM on a drink dispenser, the KCUBEDISPB MUST be used.

Notes:
Number of Wires: 3 (including ground)
Approx. Shipping Weight lbs (kg): CIM1125A 105
Refrigerant Type: R404A