

PRODUCT STRAPPING QUESTIONNAIRE

Capacity required:

Pallets per hour		Pallets per day	
------------------	--	-----------------	--

Type of product/s being strapped:

--	--	--	--

Operating floor surface/s:

ie Level slab			
---------------	--	--	--

Type of pallet:

ie Chep style			
---------------	--	--	--

Entry:

Two-way entry		Four-way entry	
---------------	--	----------------	--

Pallet dimensions:

Max. height		Minimum height	
Maximum width		Minimum width	
Maximum length		Minimum length	

Strap Patterns Required:

Through the void		Cross	
Under		Other	

Strap Width:


9 - 13 mm	12 - 16mm	15 - 19mm	Other
-----------	-----------	-----------	-------

Tension Required:

Variable	Auto	400 – 1200N	900 – 2500N
1200 – 4000N	Specific		

Conveyor/Trolley height:

If pallets other than Chep style used, please provide a drawing/details

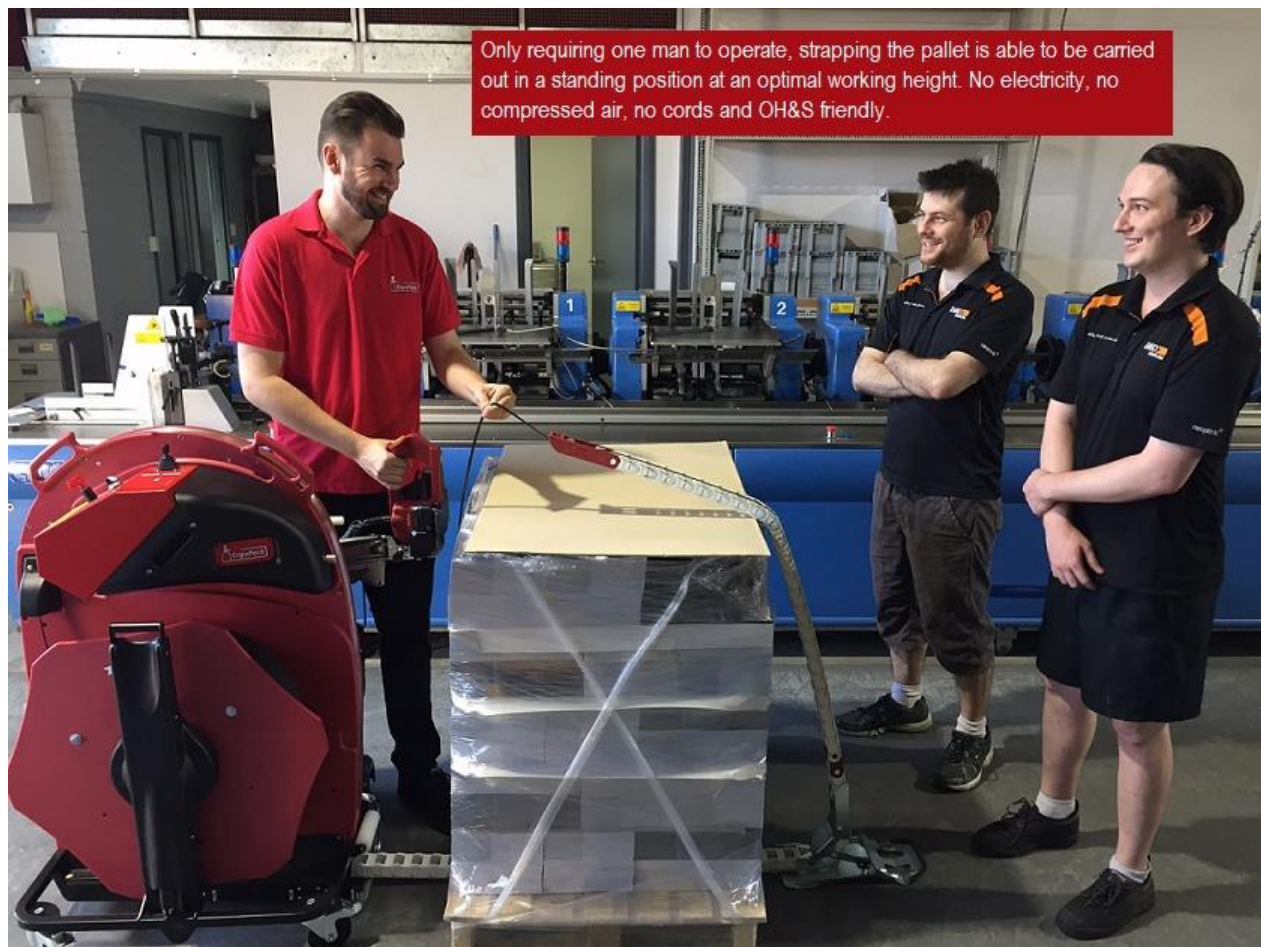

This strapping assistant works both crosswise and lengthwise with a floor clearance of only 5cm. Using a revolutionary chain lance, ErgoStrap pallet strapping machines dispense the strap through the void of the pallet, vertically up the back of the pallet and returning across the top to the operator who takes the strap and tensions/ seals it with the battery powered strapping tool. If cross strapping is necessary using a two way entry pallet, the pallet is raised using a fork lift or hand pallet truck to enable the strap lance to pass beneath the pallet

The battery operated ErgoStrap pallet strapping machine is portable, allowing easy strapping of pallets anywhere in the warehouse. A single battery charge will allow ErgoStrap pallet strappers to execute 100-400 strap cycles depending on the height of the pallets. Battery recharging takes about 6 hours and can be done overnight.