



Full Format 17x17 Cassette Sized Flat Panel Detector

1717SCC/SGC

The 1717SCC/SGC is a cassette type detector providing a full size active area. A versatile and reliable imaging solution for your diagnostic needs. With a full field of view of 17" x 17" (43 cm x 43 cm), it covers comprehensive range of radiographic applications. Its 15 mm thickness allows you to experience true flat panel digital imaging technology without modifications to the existing bucky.

The 1717SCC/SGC is an ideal and economical digital solution, designed to meet your imaging requirements.

Application


- General Radiography
- Chiropractic
- Orthopedics
- Veterinary

Feature

- Cassette Sized Flat Panel Detector
- Auto-triggering Technology
- Super Fine Image (127µm)
- Improved Workflow through Immediate Image Capture
- Wide Image Area, Significantly Reduced Dead Space


1717SCC/SGC

True 17x17 Cassette Sized Flat Panel Detector



Upgrade to True Digital Flat Panel Technology

The 1717SCC/SGC Series gives users the opportunity to experience True Flat Panel Digital Imaging Technology without modifications to existing X-ray equipment. By having the same 15 mm thickness as traditional film screen cassettes, this lightweight detector fits into existing standard cassette trays, allowing existing film or CR systems to be upgraded with ease. Its advanced auto-triggering technology eliminates the need to integrate the device with the X-ray generator. The 1717 Series is a universal and economical solution designed to meet any X-ray department's needs.



Improved Workflow through Immediate Image Capture

The 1717SCC/SGC will increase workflow while minimizing labor time by avoiding additional steps that are required when using film processors or CR digitizers. Image preview time is reduced to just 1.5 seconds. Virtual instant display of images significantly increases productivity while reducing wait time for both patients and staff.



Wide Image Area, Significantly Reduced Dead Space

Unlike traditional film and CR cassette sizes (14" x 17"), adopting a full field of view providing a 17" x 17" usable area gives more flexibility with positioning and allows more regions of anatomy to be acquired on one image without the need to rotate the detector. With the dead space percentage being significantly reduced, the 1717SCC/SGC leads to optimized efficiency without any wasted image area.

Specification

Sensor	
Panel	Amorphous Silicon with TFT
Scintillator	CsI:Tl (SCC) / Gd ₂ O ₂ S:Tb (SGC)
Pixel Pitch	127µm
Pixel Matrix	3,328 x 3,328
Electronics	
A/D Conversion	14bit
Data Acquisition Time	<1.5 sec (preview)
	<5 sec (display)
Data Interface	Gigabit Ethernet


Performance	
DQE (0 lp/mm)	Typ. 65% (SCC) / Typ. 45% (SGC)
MTF (1 lp/mm)	Typ. 60%
Limiting Resolution	Max. 3.9 lp/mm
Energy Range	40 ~ 150kVp
Mechanical	
Size	460 x 460 x 15.5 mm
Weight	4.4 kg (SCC) / 4.1 kg (SGC)
Housing	Mg
Operation Environment	5~40°C, 30~75%RH (non-condensing)
Storage & Transport Environment	-10~55°C, 10~80%RH (non-condensing)

Interface

□ System1(Single Detector)



□ System2(Dual Detectors)

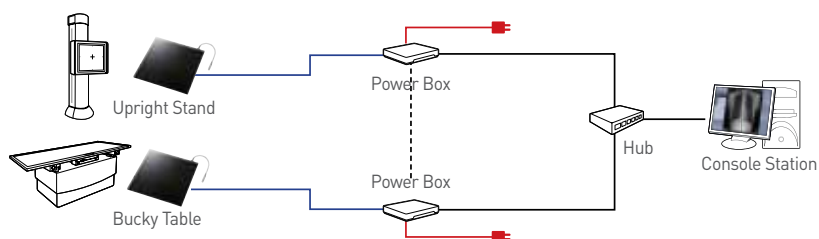

miatech
veterinary diagnostic imaging specialists

Miatech Australia
20 Nicole Way, DANDENONG VIC 3175
Office : (03) 9794 5366
www.miatechaustr.com.au

Imaging the Next
Rayence

Rayence Co., Ltd.

14, Samsung 1-ro 1-gil, Hwaseong-si, Gyeonggi-do, Korea
Office : (82)31-8015-6245 Fax: (82)31-8015-6598
www.rayence.com

Rayence Inc., USA

2200 Fletcher Ave. Ste. 705B Fort Lee, NJ 07024
Office: (1)201-585-0290 Fax: (1)201-585-0293
www.rayenceusa.com