



your reliable partner

EAS[®]-HT

Reliable High Torque
safety clutches
for heavy load applications





Always in use

EAS®-HT safety clutches for heavy load applications prolong the availability of your production systems.

They increase your profit, prevent damage caused by overload and save costs.

EAS®-HT safety clutches

the reliable, non-destructive overload protection

- Disengaging
- Steplessly adjustable
- Precise
- Compact
- Robust



Tested safety

For more than 40 years, we have been dimensioning, developing and manufacturing safety clutches for heavy load applications.

You can rely on the tested reliability and safety of our heavy load clutch.

Experts, not experiments

as safety does not allow for compromises

safe – reliable – innovative

EAS[®]-HT short bearing-supported hub



Torque:
4 to 40 kNm

Sizes 7 to 10
Type 4050._0400

- Direct attachment of the drive element on the bearing-supported, output-side clutch flange.
- The bearing is able to absorb high additional forces in axial and radial directions.

Page 6

EAS[®]-HT lastic



Torque:
4 to 40 kNm

Sizes 7 to 10
Type 4053._0400

- Double shaft design with a flexible, positive locking coupling
- Absorbs impact-type loads

Page 8

EAS[®]-HT flange design



Torque:
7.5 to 440 kNm

Sizes 0 to 6
Type 4060.71400

- Compact, ready-to-install module
- Can easily be integrated into the drive line

Page 10

EAS[®]-HT Toothed coupling



Torque:
7.5 to 440 kNm

Sizes 0 to 6
Type 4061.71400

- Double shaft design
- Toothed coupling with crowned teeth cutting
- Robust and temperature-resistant
- High misalignment compensation capability

Page 12

EAS[®]-HT backlash-free



Torque:
7.5 to 140 kNm

Sizes 0 to 4
Type 4062.71400

- Double shaft design with a torsionally rigid, backlash-free disk pack coupling
- High torsional rigidity
- Backlash-free torque transmission
- Maintenance-free

Page 14

EAS[®]-HT lastic bolt



Torque:
40 to 260 kNm

Sizes 3 to 5
Type 4063.70400

- Double shaft design with a flexible, positive locking coupling
- Absorbs impact-type loads

Page 16


EAS[®]-HT Options

Customer-specific designs
Low temperature design
Alternative shaft connections
ATEX

Page 18

EAS[®]-elements

- Standard
- Reinforced



- Torque limiting or force limiting elements
- Installation into two flanges located towards one another
- Integration into existing constructions possible

Page 20

Technical Explanations

General
Pre-selection
Misalignment compensation capability

Page 23

Additional branch-optimised EAS[®] safety clutches

High-speed clutches EAS[®]-HSE



Torque:
100 to 8.400 Nm

Reliable overload protection
at high speeds

Sizes 02 to 0
Type 404_ . _04_ _

For more information as well as detailed Technical Data and Dimensions, please see our product catalogue EAS[®]-HSC/ EAS[®]-HSE.

Extruder clutches EAS[®]-dutytorque



Torque:
70 to 17.000 Nm

Protect extruder screws
from expensive damage caused by overload

Sizes 2 to 9
Type 4043. _1400

For more information as well as detailed Technical Data and Dimensions, please see our product catalogue EAS[®]-dutytorque.

Rustproof design




Corrosion-protected safety clutches for environmental and waste water technology

EAS[®]-HT

Short bearing-supported hub

Type 4050_0400
Sizes 7 to 10

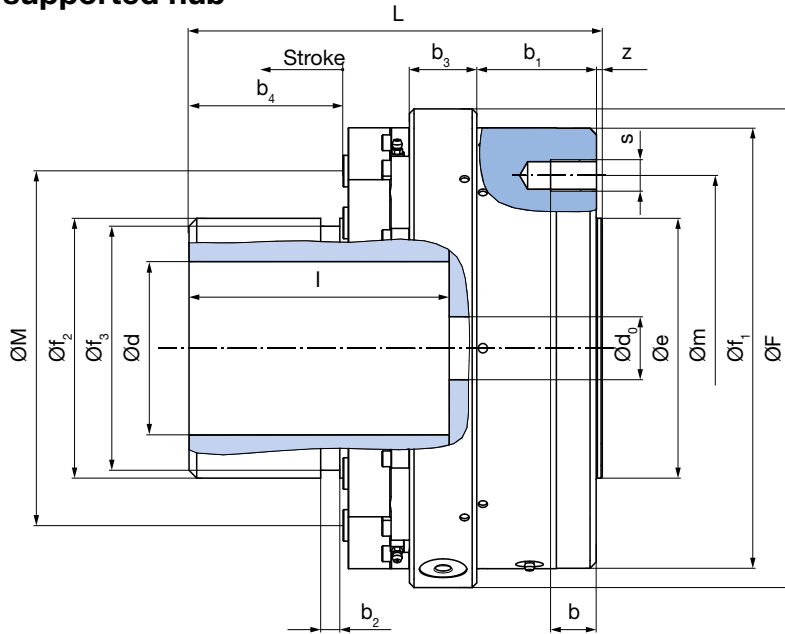

Order Number

__ / 4 0 5 0 . __ 0 4 0 0 / __ / __ / __



Sizes
7
to
10

Torque range ¹⁾
low
medium
high
very high

4
5
6
7

Bores ¹⁾
 $\varnothing d^{H7}$

Bore
 $\varnothing d_0$

**Torque adjust-
ment value**
[kNm]

Keyway acc. DIN 6885/1 - P9

Example: Order Number 8 / 4050.60400 / 90 / 35 / 84050.60400 / 90 / 35 / 8

1) Position of the keyway to the tapped hole "s" in the thrust piece is not defined. Defined position available on request.

EAS®-element clutch

Technical Data				Sizes			
				7	8	9	10
Limit torques for overload	Type 4050.40400	M_G	[kNm]	1.3 - 2.6	1.6 - 3.2	4 - 8	5 - 10
	Number of EAS®-elements			2	2	2	2
	Type 4050.50400	M_G	[kNm]	2 - 4	3.2 - 6.4	6 - 12	10 - 20
	Number of EAS®-elements			3	4	3	4
	Type 4050.60400	M_G	[kNm]	2.6 - 5.2	4.8 - 9.6	8 - 16	15 - 30
	Number of EAS®-elements			4	6	4	6
	Type 4050.70400	M_G	[kNm]	4 - 8	6.5 - 13	12 - 24	20 - 40
	Number of EAS®-elements			6	8	6	8
Sizes EAS®-elements				0	0	1	1
Maximum speed		n_{max}	[rpm]	3000	2800	2500	2200
Bolt stroke on overload			[mm]	6	6	8	8

Max. permitted forces on the flange connection				Sizes			
				7	8	9	10
Radial forces	Type 4050._0400	F_R	[kN]	15	20	30	40
Axial forces		F_A	[kN]	10	15	20	30

Mass moments of inertia and weights				Sizes			
				7	8	9	10
EAS®-hub-side	Type 4050._0400	J	[kgm ²]	0.18	0.38	1.05	2.37
Flange side	Type 4050._0400	J	[kgm ²]	0.17	0.38	1.3	2.65
Weight at d_{max}	Type 4050._0400		[kg]	47	76	145	232

Bores [mm]			Sizes			
			7	8	9	10
EAS®-hub-side		d_{max}	90 ^{H7}	110 ^{H7}	135 ^{H7}	160 ^{H7}
Flange side		$d_{0 max}$	30	40	48	58


Dimensions [mm]	Sizes			
	7	8	9	10
b	25	30	35	35
b₁	66	78	94	110
b₂	12.5	12.5	15	15
b₃	44	44	56	56
b₄	70.5	100.5	119.3	159.3
e_{h7}	147	165	242	276
F	260	304	380	450
f₁	237.5	279.5	359.5	417.5
f₂	120	165	190	245
f₃	110	155	180	230
L	228	270	330	387
l	140	170	210	250
M	180	225	270	340
m	190	220	285	325
s	8xM16	8xM20	8xM24	12xM24
z	4	4	5	6

We reserve the right to make dimensional and constructional alterations.

EAS[®]-HT

lastic

Type 4053_0400
Sizes 7 to 10

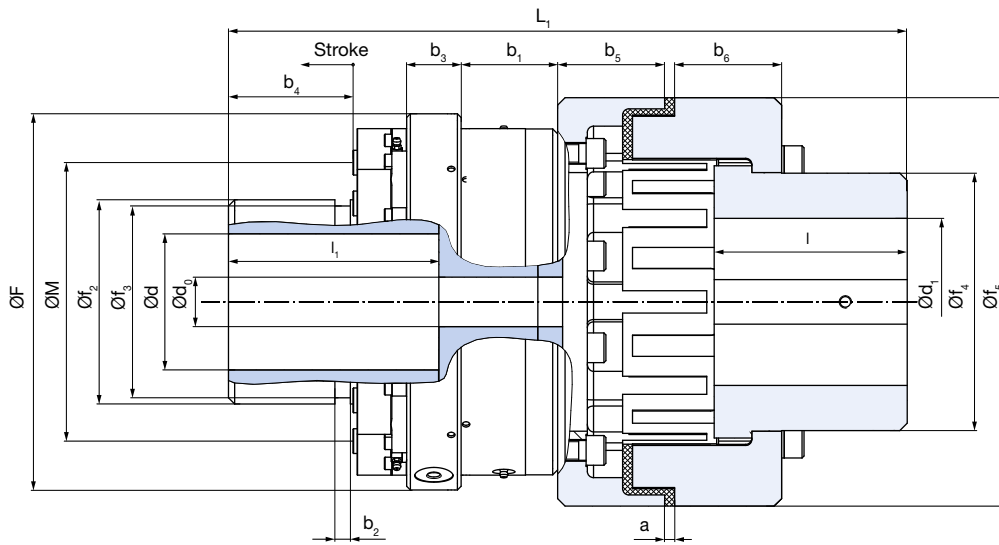

Order Number

__ / 4 0 5 3 . __ 0 4 0 0 / __ / __ / __ / __



Sizes
7
to
10

Torque range
low
medium
high
very high

4
5
6
7

Bore
Ø d^{H7}

Bore
Ø d₀

Bore
Ø d₁^{H7}

**Torque adjust-
ment value**
[kNm]

Keyway acc. DIN 6885/1 - P9

Example: Order Number 8 / 4053.60400 / 90 / 35 / 115 / 8

EAS®-element clutch

Technical Data				Sizes				
				7	8	9	10	
Limit torques for overload	Type 4053.40400	M_G	[kNm]	1.3 - 2.6	1.6 - 3.2	4 - 8	5 - 10	
	Number of EAS®-elements			2	2	2	2	
	Type 4053.50400	M_G	[kNm]	2 - 4	3.2 - 6.4	6 - 12	10 - 20	
	Number of EAS®-elements			3	4	3	4	
	Type 4053.60400	M_G	[kNm]	2.6 - 5.2	4.8 - 9.6	8 - 16	15 - 30	
	Number of EAS®-elements			4	6	4	6	
	Type 4053.70400	M_G	[kNm]	4 - 8	6.5 - 13	12 - 24	20 - 40	
	Number of EAS®-elements			6	8	6	8	
	Sizes EAS®-elements				0	0	1	1
	Maximum speed			n_{max}	[rpm]	2250	2000	1500
Bolt stroke on overload				[mm]	6	6	8	8
Flexible shaft coupling	Permitted misalignments ¹⁾	axial	ΔK_a	[mm]	±2.5	±2.5	±2.5	±2.5
		radial	ΔK_r	[mm]	0.3	0.3	0.3	0.3
		angular	ΔK_w	[mm]	0.3	0.3	0.3	0.3
Nominal and maximum torques, flexible coupling			T_{KN}	[kNm]	5.8	9.9	20.5	28
			T_{Kmax}	[kNm]	8.3	14.5	27	66

Mass moments of inertia and weights				Sizes				
				7	8	9	10	
Mass moments of EAS®-hub-side inertia		J	[kgm ²]	0.18	0.38	1.05	2.37	
Flexible side		J	[kgm ²]	0.57	1.62	5.0	10.7	
Weight at d_{max}				[kg]	85	154	282	464

Bores [mm]			Sizes			
			7	8	9	10
EAS®-hub-side		d_{max}	90 ^{H7}	110 ^{H7}	135 ^{H7}	160 ^{H7}
Bearing flange		d_{0max}	30	40	48	58
Flexible side		d_{1max}	115 ^{H7}	135 ^{H7}	180 ^{H7}	200 ^{H7}

Dimensions [mm]	Sizes			
	7	8	9	10
a	5.5	8	8	8
b ₁	66	78	94	110
b ₂	12.5	12.5	15	15
b ₃	44	44	56	56
b ₄	70.5	100.5	119.3	159.3
b ₅	76	86.5	102	108
b ₆	76	86.5	102	108
F	260	304	380	450
f ₂	120	165	190	245
f ₃	110	155	180	230
f ₄	164	208	275	289
f ₅	265	330	415	480
L ₁	469.5	548.5	668	754
l	137	156	196	220
l ₁	140	170	210	250
M	180	225	270	340


We reserve the right to make dimensional and constructional alterations.

1) The values refer to 1500 rpm.

EAS[®]-HT

flange design

Type 4060.71400
Sizes 0 to 6

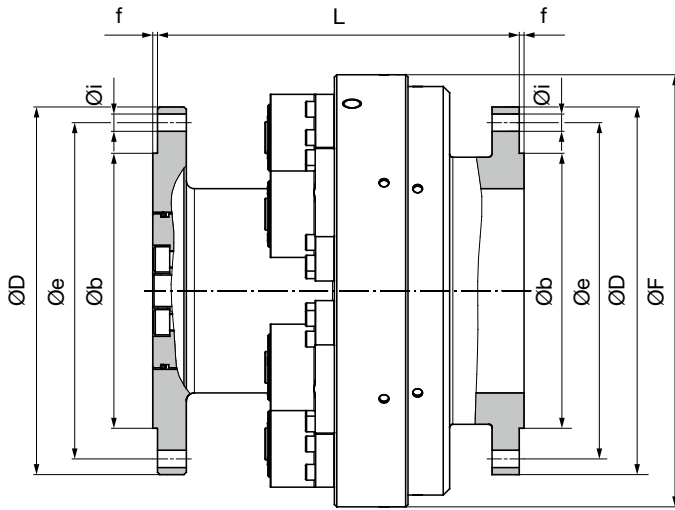

Order Number

__ / 4 0 6 0 . 7 1 4 0 0 / __



Sizes 0 to 6



Torque adjust-
ment value
[kNm]

Example: Order number 5/ 4060.71400 / 200

EAS®-element clutch

Technical Data			Sizes						
			0	1	2	3	4	5	6
Limit torques for overload	M_G	[kNm]	7.5 - 15	12.5 - 25	20 - 40	37.5 - 75	70 - 140	125 - 250	220 - 440
Number of EAS®-elements			6	8	6	8	12	10	10
Sizes EAS®-elements			0	0	1	1	1	2	2 ¹⁾
Maximum speed	n_{max}	[rpm]	2000	1750	1500	1250	1000	900	750
Bolt stroke on overload		[mm]	6	6	8	8	8	12	12

Mass moments of inertia and weights			Sizes						
			0	1	2	3	4	5	6
EAS®-element-side	J	[kgm ²]	0.25	0.5	1.16	2.71	5.51	16.29	27.87
EAS®-pressure flange side	J	[kgm ²]	0.19	0.37	0.96	2.05	4.22	10.29	19.3
Weight at d_{max}		[kg]	56	77	142	212	303	627	814


Dimensions [mm]	Sizes						
	0	1	2	3	4	5	6
b_{h7}	175	230	255	310	340	460	540
e	214	269	306	360	400	531	618
D	234	292	330	390	430	567	660
F	275	320	380	455	545	640	740
f	3	3	4	4	5	6	6
i	11	13	13	17	17	21	25
L	226	243	298	312	328	476	485

We reserve the right to make dimensional and constructional alterations.

EAS[®]-HT

Toothed coupling

Type 4061.71400
Sizes 0 to 6

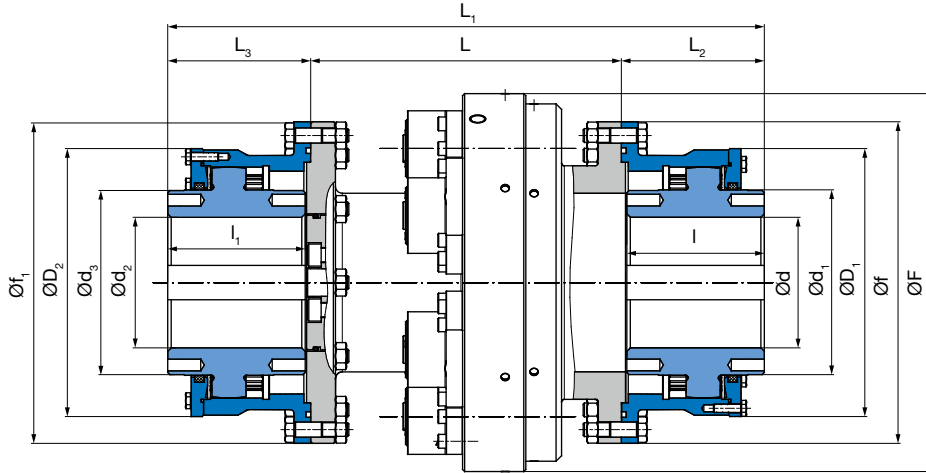

Order Number

__ / 4 0 6 1 . 7 1 4 0 0 / __ / __ / __



Sizes 0 to 6



Bore
 $\varnothing d^{H7}$



Bore
 $\varnothing d_2^{H7}$



Torque adjust-
ment value
[kNm]

Keyway acc. DIN 6885/1 - P9

Example: Order number 4 / 4061.71400 / 180 / 200 / 90

EAS®-element clutch

Technical Data			Sizes								
			0	1	2	3	4	5	6		
Limit torques for overload	M_G	[kNm]	7.5 - 15	12.5 - 25	20 - 40	37.5 - 75	70 - 140	125 - 250	220 - 440		
Number of EAS®-elements			6	8	6	8	12	10	10		
Sizes EAS®-elements			0	0	1	1	1	2	2 ¹⁾		
Maximum speed	n_{max}	[rpm]	2000	1750	1500	1250	1000	900	750		
Bolt stroke on overload		[mm]	6	6	8	8	8	12	12		
Toothed coupling	Permitted misalignments ¹⁾²⁾	axial	ΔK_a	[mm]	±2	±3	±3	±3	±3	±4	±4
		radial	ΔK_r	[mm]	7.5	8.6	10.2	11.7	12.4	18.4	20.6
		angular	ΔK_w	[mm]	1.25	1.25	1.25	1.25	1.25	1.25	1.25
Nominal and maximum torques, curved-tooth coupling	T_{KN}	[kNm]	12.5	25	40	63	100	250	400		
	T_{Kmax}	[kNm]	25	50	80	12.6	200	500	800		

1) The values refer to 1500 rpm.

2) Per joint

Mass moments of inertia and weights			Sizes						
			0	1	2	3	4	5	6
EAS®-pressure flange side	J	[kgm ²]	0.27	0.65	1.48	3.33	6.43	19.17	39.74
EAS®-element side	J	[kgm ²]	0.34	0.78	1.69	3.99	7.72	25.18	48.3
Weight at d_{max} / d_{2max}		[kg]	83	132	220	345	488	1053	1523

Bores [mm]			Sizes						
			0	1	2	3	4	5	6
EAS®-pressure flange side	d_{max}		95	130	150	185	210	285	340
EAS®-element side	d_{2max}		95	130	150	185	210	285	340


Dimensions [mm]	Sizes							
	0	1	2	3	4	5	6	
d_1	135	185	210	255	290	400	480	
d_3	135	185	210	255	290	400	480	
D_1	195	251	288	337	375	502	584	
D_2	195	251	288	337	375	502	584	
F	275	320	380	455	545	640	740	
f	234	292	330	390	430	567	660	
f_1	234	292	330	390	430	567	660	
L	226	242.5	298	312	328	476	485	
L_1	434	502.5	588	685	740	1012	1125	
L_2	104	130	145	186.5	206	268	320	
L_3	104	130	145	186.5	206	268	320	
l	100	125	140	180	200	260	310	
l_1	100	125	140	180	200	260	310	

We reserve the right to make dimensional and constructional alterations.

EAS[®]-HT

backlash-free

Type 4062.71400
Sizes 0 to 4

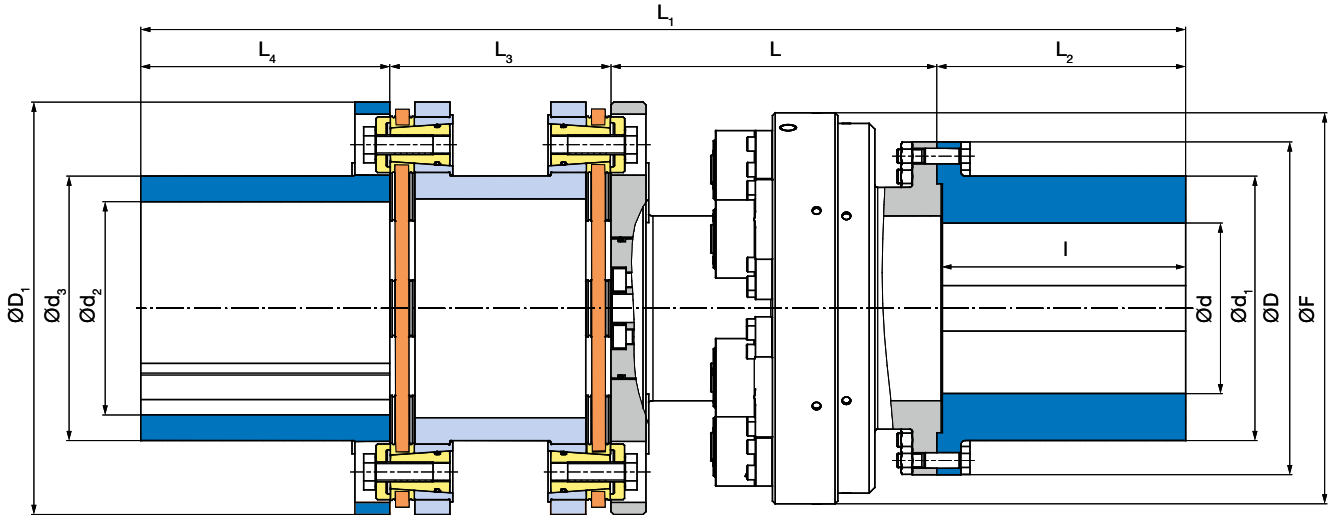

Order Number

_ / 4 0 6 2 . 7 1 4 0 0 / _ / _ / _											
▲				▲				▲		▲	
Sizes 0 to 4				Double-jointed coupling				Bore $\text{Ø} d^{H7}$		Bore $\text{Ø} d_2^{H7}$	
				0				Keyway acc. DIN 6885/1 - P9		Torque adjustment value [kNm]	

Example: Order number 4 / 4062.71400 / 180 / 200 / 90

EAS®-element clutch

Technical Data			Sizes						
			0	1	2	3	4		
Limit torques for overload	M_G	[kNm]	7.5 - 15	12.5 - 25	20 - 40	37.5 - 75	70 - 140		
Number of EAS®-elements			6	8	6	8	12		
Sizes EAS®-elements			0	0	1	1	1		
Maximum speed	n_{max}	[rpm]	2000	1750	1500	1250	1000		
Bolt stroke on overload		[mm]	6	6	8	8	8		
Torsionally rigid shaft coupling	Permitted misalignments ¹⁾	axial	ΔK_a	[mm]	1.6	1.7	2.1	2.3	2.3
		radial	ΔK_r	[mm]	1.0	1.0	1.1	1.3	1.4
		angular	ΔK_w	[°]	0.4	0.4	0.4	0.4	0.4
Nominal and maximum torques, torsionally rigid all-steel coupling	T_{KN}	[kNm]	22	33	50	73	110		
	T_{Kmax}	[kNm]	44	66	100	146	220		

1) The values refer to 1500 rpm.

Mass moments of inertia and weights				Sizes				
				0	1	2	3	4
Mass moments of inertia	Hub side	J	[kgm ²]	0.35	0.76	1.58	3.68	6.56
	torsionally rigid side	J	[kgm ²]	0.86	1.73	3.5	7.1	13.95
Weight at d_{max}			[kg]	132	195	308	468	665

Bores [mm]			Sizes				
			0	1	2	3	4
Hub-side	d_{max}		140	170	180	220	240
Torsionally rigid side	d_{2max}		140	160	180	210	240


Dimensions [mm]	Sizes				
	0	1	2	3	4
d_1	186	230	243	300	321
d_3	186	215	243	279	321
D	234	292	330	390	430
D₁	290	332	378	431	492
F	275	320	380	455	545
L	229	245.5	302	316	330
L₁	735	811.5	934	1054.5	1173
L₂	175	200	225	265	310
L₃	155.6	166	182	208.4	223
L₄	175	200	225	265	310
l	171	195	219	260	302

We reserve the right to make dimensional and constructional alterations.

EAS[®]-HT

lastic bolt

Type 4063.70400
Sizes 4 to 6

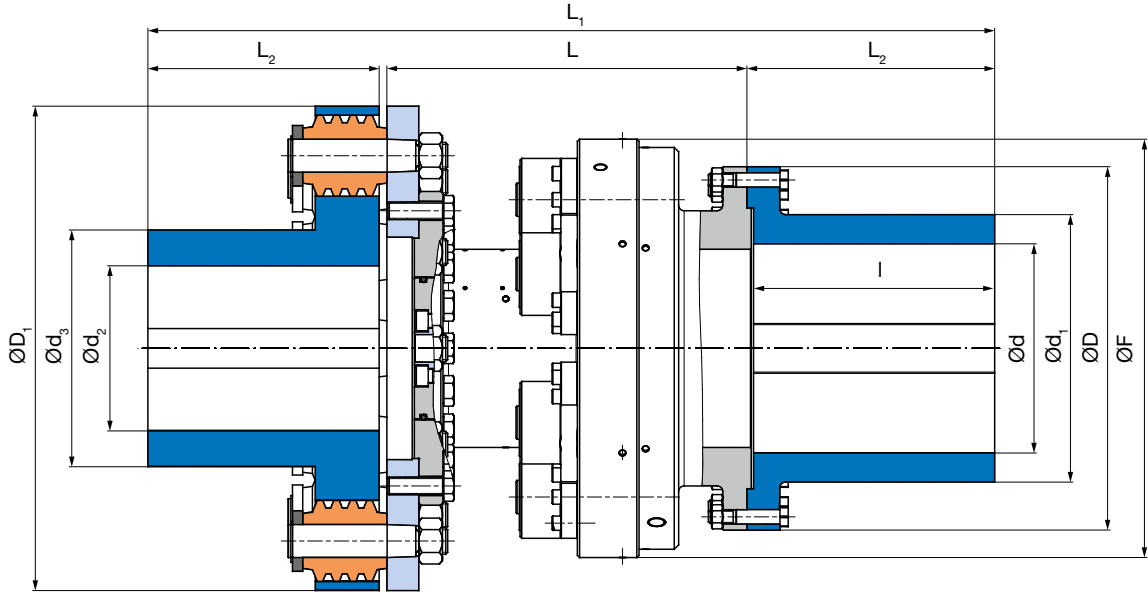

Order Number

__ / 4 0 6 3 . 7 0 4 0 0 / __ / __ / __



Sizes 4 to 6



Bore
Ø d^{H7}



Bore
Ø d₂^{H7}



Torque adjust-
ment value
[kNm]

Keyway acc. DIN 6885/1 - P9

Example: Order number 4 / 4063.70400 / 270 / 180 / 90

EAS®-element clutch

Technical Data				Sizes		
				4	5	6
Limit torques for overload	M_G	[kNm]	40 - 80	72.5 - 145	130 - 260	
Number of EAS®-elements			12	10	10	
Sizes EAS®-elements			1	2	2	
Maximum speed	n_{max}	[rpm]	1000	900	750	
Bolt stroke on overload		[mm]	8	12	12	
Flexible shaft coupling	Permitted misalignments ¹⁾	axial	ΔK_a	[mm]	±4	
		radial	ΔK_r	[mm]	1.5	
		angular	ΔK_w	[mm]	4.6	
Nominal and maximum torques, flexible coupling		T_{KN}	[kNm]	48	100	
		T_{Kmax}	[kNm]	96	200	

Mass moments of inertia and weights				Sizes		
				4	5	6
Mass moments of inertia	Hub side	J	[kgm ²]	6.6	20.02	39.63
	Flexible side	J	[kgm ²]	22.35	55.18	110.68
Weight at d_{max}			[kg]	706	1407	1956

Bores [mm]			Size		
			4	5	6
Hub-side	d_{max}		240	300	340
Flexible side		d_{2max}	225	250	320

Dimensions [mm]	Sizes		
	4	5	6
d_1	321	420	500
d_3	320	360	450
D	430	567	660
D_1	660	760	920
F	545	640	740
L	375	533	543
L_1	946	1201	1231
L_2	310	350	370
L_3	250	300	300
I	302	342	362

We reserve the right to make dimensional and constructional alterations.

1) The values refer to 1500 rpm.


EAS[®]-HT Options

For the EAS[®]-HT clutches, designs specially created according to customer requests and different variants are also available.

EAS[®]-HT clutches can be combined with additional attachment parts.

We are happy to advise you on the dimensioning and configuration of your optimum design.


EAS[®]-HT with automatic re-engagement



After overload occurrence, the EAS[®]-HT safety clutch is disengaged. It is possible to engage the EAS[®]-HT safety clutch via remote control by means of automatic re-engagement. Re-engagement can be carried out pneumatically, hydraulically, electromechanically or mechanically.



EAS[®]-HT with mechanical disengagement




Mechanical disengagement device for the EAS[®]-elements.

The EAS[®]-elements can be disengaged individually mechanically.



EAS[®]-HT with engagement bowl




Engagement without aids.

Automatic engagement device for low operating speeds. Direct overload query possible through switching disk.



EAS[®]-HT radial




EAS[®]-HT radial for small construction space length values and low to medium operating speed values.



EAS[®]-HT Options


EAS[®]-HT with integrated drive elements



EAS[®]-HT, integrated attachment of sprocket and toothed wheels, V-belt disks etc.




EAS[®]-HT for roller gears



Highest torques at lowest diameters.
The alternative to hydraulic clamping sets and shear pins in rolling mills.



Frictionally-locking shaft-hub connection



Frictionally-locking shaft-hub connections:

- Shrink disk (see Fig.)
- External shrink disk
- Oil press fit

EAS[®]-HT low temperature design



Reliable overload protection in case of very low temperatures to **-48 °C**.

(Please contact the manufacturer separately for this).



ATEX design



EAS[®]-HT safety clutches are also available in ATEX design according to the directive 94/9 EC (ATEX 95).

(Please contact the manufacturer separately for this).

EAS[®]-element

Application


- EAS[®]-elements for installation in two bearing-supported flanges facing each other or for integration into existing constructions
- As EAS[®]-HT safety clutch component
- For customer-specific constructions

Applications

- Conveyor belts
- Crushers
- Rolling mills
- Underground mining / mining
- Raw material extraction

Advantages/Benefits

- Safe overload protection
- Can be used flexibly and in modular form
- Maximum performance density
- Release forces adjustable
- Easy and quick engagement
- Large number of disengagement procedures

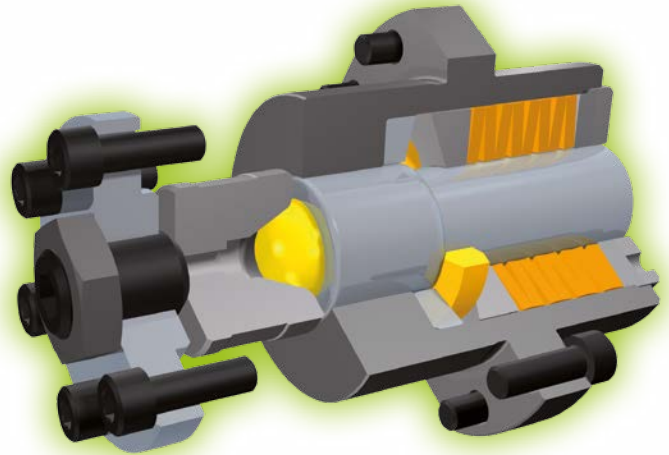

*Rustproof design
available on request*

Function:

Positive locking transmission of circumferential force and axial force. In case of overload, the EAS[®]-elements separate the input and output mechanically, so that the system can slow down freely. Manual re-engagement of the individual elements (automatic re-engagement available on request).





The catalogue contains basic information on pre-selection and dimensioning.


For detailed information on selection, dimensioning, installation, initial operation and maintenance, please see the Installation and Operational Instructions.

EAS[®]-element




Standard

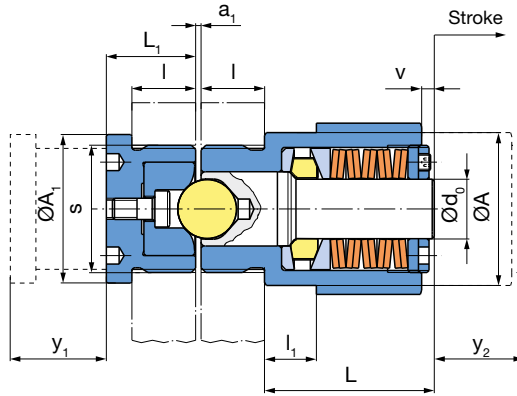

Type 440_04.0
Sizes 02 to 01



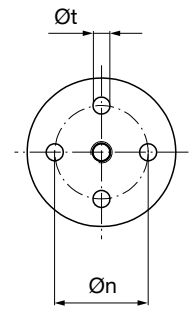


Type 440_04.0
Sizes 0 to 2

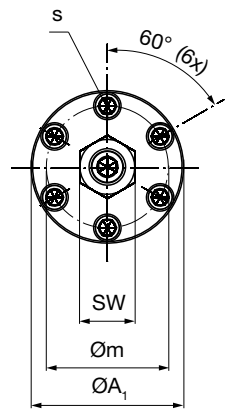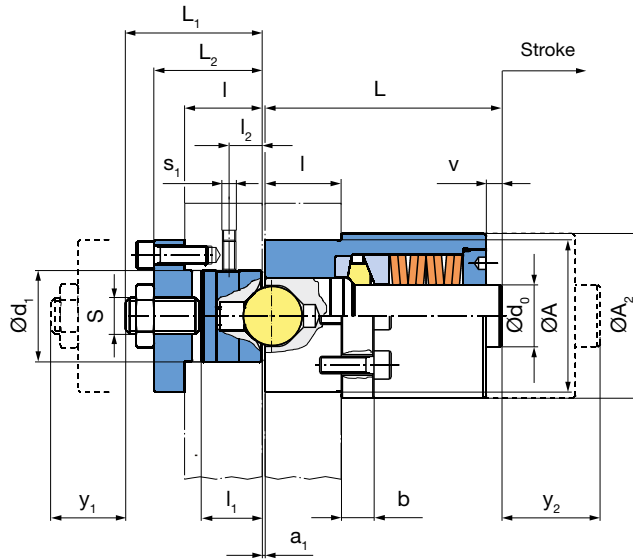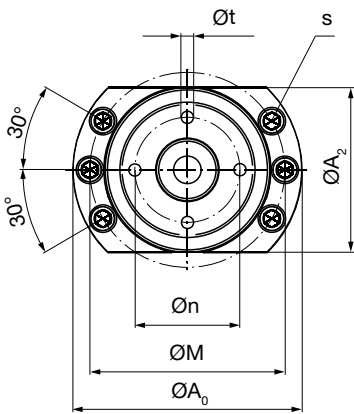

Reinforced

Type 441.604.0
Sizes 0 to 2

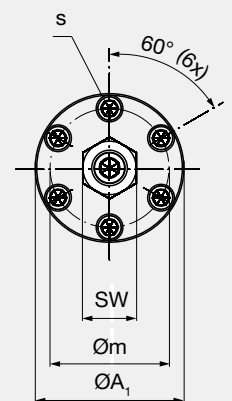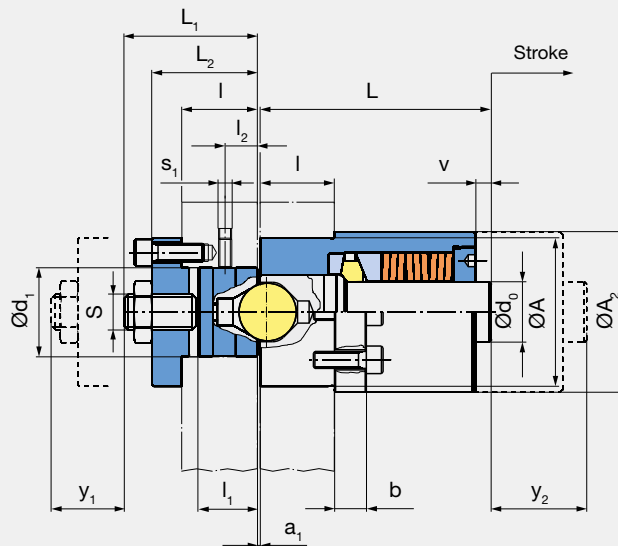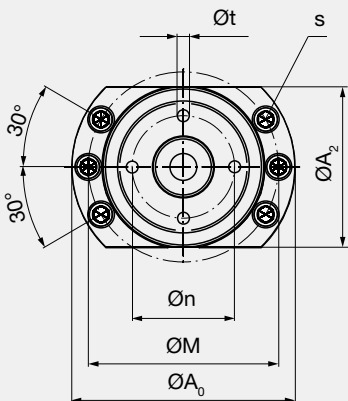

EAS[®]-element

Technical Data				Sizes				
				02	01	0	1	2
Circumferential force	Type 440.404.0 (Low torque range)	F _{u min}	[kN]	0.22	1	1.8	5	4
		F _{u max}	[kN]	0.54	2	5	10	11
	Type 440.504.0 (Medium torque range)	F _{u min}	[kN]	0.5	1.25	3.75	7.5	10
		F _{u max}	[kN]	1.4	2.5	7.5	15	30
	Type 440.604.0 (High torque range)	F _{u min}	[kN]	1.2	2.5	7.5	15	30
		F _{u max}	[kN]	2.5	5	15	30	60
	Type 441.604.0 Reinforced design	F _{u min}	[kN]	-	-	19	38	75
		F _{u max}	[kN]	-	-	38	75	150
Axial force	Type 440.404.0 (Low torque range)	F _{ax min}	[kN]	0.2	0.9	1.62	4.5	3.6
		F _{ax max}	[kN]	0.48	1.8	4.5	9	9.9
	Type 440.504.0 (Medium torque range)	F _{ax min}	[kN]	0.45	1.12	3.37	6.75	9
		F _{ax max}	[kN]	1.26	2.25	6.75	13.5	27
	Type 440.604.0 (High torque range)	F _{ax min}	[kN]	1.08	2.25	6.75	13.5	27
		F _{ax max}	[kN]	2.25	4.5	13.5	27	54
	Type 441.604.0 Reinforced design	F _{ax min}	[kN]	-	-	10	20	40
		F _{ax max}	[kN]	-	-	20	40	80
Bolt stroke on overload			[mm]	2.5	4	6	8	12
Weights			[kg]	0.25	0.6	1.75	4.1	11.3

Dimensions [mm]	Sizes				
	02	01	0	1	2
A _{h7} ^{H8}	28	38	55	75	100
A ₀	-	-	85	110	150
A ₁	28	35	55	75	100
A ₂	-	-	55	75	108
a ₁	1.0	1.5	2	2	3
b	-	-	12	15	20
d ₀	10	14	20	30	40.6
d _{h7} ^{H8}	-	-	30	40	60
e	31.2	41.6	-	-	-
L	28	40	73	96	160
L ₁	15	21	52	65	80
L ₂	-	-	42	51	70
l	12	15	30	40	50

Dimensions [mm]	Sizes				
	02	01	0	1	2
l ₁	7	10	22	30	40
l ₂	-	-	12	17	22
M	-	-	72	95	128
m	-	-	44	60	80
n	17	22	31	48	69
S	-	-	M12	M20	M24
s	M24x1 ¹⁾	M30x1,5 ²⁾	M6 ³⁾	M8 ⁴⁾	M12 ⁵⁾
s ₁	-	-	M5	M6	M8
SW	27	36	19	30	36
t	3	4	5	6	8
v	2	3	3	4	15
y ₁ ⁶⁾	12	15	8	10	10
y ₂ ⁶⁾	16	21	38	50	65

We reserve the right to make dimensional and constructional alterations.

EAS[®]-element Standard

Order Number

__ / 4 4 0 . __ 0 4 . 0



Size
02
01
0
1
2

Torque range

low 4
medium 5
high 6

Example: Order number 0 / 440.504.0

EAS[®]-element Reinforced

Order Number

__ / 4 4 1 . 6 0 4 . 0



Size
0
1
2

Example: Order number 0 / 441.604.0

1) Tightening torque M_A = 40 Nm

2) Tightening torque M_A = 60 Nm

3) Fixing screw DIN EN ISO 4762 10.9 M_A = 9 Nm

4) Fixing screw DIN EN ISO 4762 10.9 M_A = 19 Nm

5) Fixing screw DIN EN ISO 4762 10.9 M_A = 76 Nm

6) y₁ and y₂ are extension dimensions


Technical explanations EAS[®]-HT safety clutch

Characteristics

- Positive locking torque transmission acc. to the ball-detent principle
- Adjustable torque
- Separates disengagingly
- Easy repeat operation start-up
- Robust
- Long service lifetime



**Rustproof design
available on request**

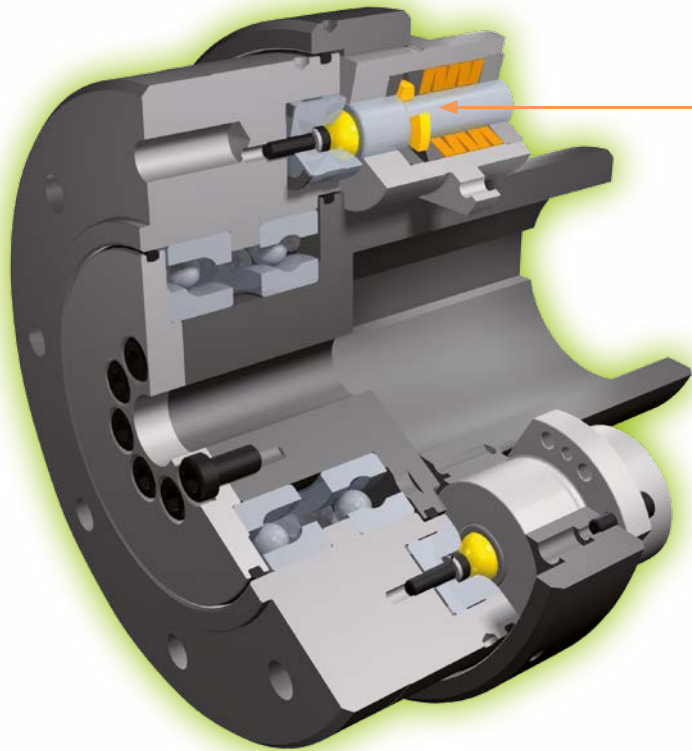

Design

All clutch parts are made of steel. EAS[®]-HT safety clutch basic components have a zinc-phosphated surface which provides a basic corrosion protection for further surface treatments.

Clutch types 4050, 4060 are also suitable for oil-running.


The limit torque for overload on the clutch can be adjusted by changing the cup spring pre-tension of each overload element.

The EAS[®]-HT safety clutches can be set to the required limit torque for overload at the place of manufacture. Subsequent torque changes can be carried out using the Adjustment Diagram included in the delivery (see respective Installation and Operational Instructions).


Operating principle of the EAS[®]-HT safety clutch Overload elements

- If the proportional circumferential force on the individual elements proves too large, the resulting axial force causes an axial movement of the bolt via the ball/calotte system and therefore the disconnection of the torque transmission.
- The maximum circumferential force is individually determined through the adjusting nut and *mayr*[®]-cup springs. The transmittable torque is determined in this way.
- Due to the axial stroke of the bolt (ball carrier), the control segments move radially outwards, thereby disconnecting the components axially.
- Re-engagement of the balls through a bolt stroke in the direction of the calotte takes place either manually or via a *mayr*[®] re-engagement device (pneumatic, hydraulic, electromechanical or mechanical).

Engaged



Disengaged



Technical explanations EAS[®]-HT safety clutch

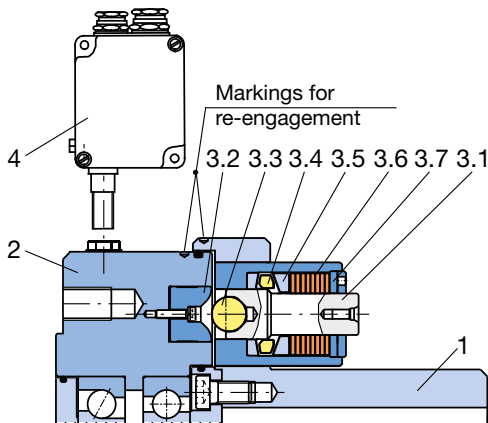


Fig. 2: EAS[®]-element clutch disengaged

Processes for torque switch-off on overload:

On overload, the hub part 1 and the output flange 2 begin to turn against each other. The bolts 3.1 in the overload elements are pressed via the control segments 3.4 against the force of the cup springs 3.6 from the thrust washers 3.2. The control segments 3.4 travel radially outwards over the bolt 3.1 switching edge and hold the bolts 3.1 in a disengaged position (see Fig. 2). The positive locking connection of the hub part 1 and the output flange 2 is nullified. The originally coupled masses can slow down freely. The drive is switched off electrically via speed monitoring device 4.

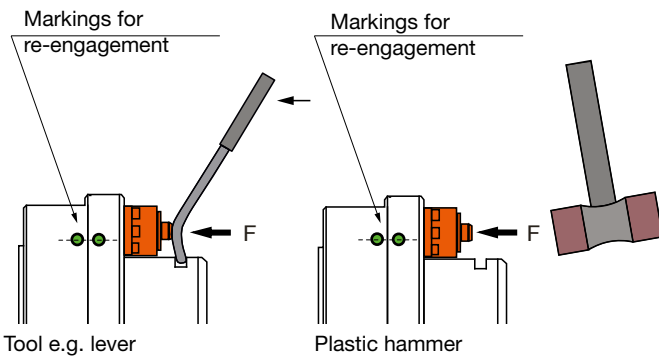


Fig. 3

Re-engagement:

Turn the hub part 1 and the output flange 2 into the correct angular position to one another (re-engagement position can be recognized via the marking bores on the clutch outer diameter, Fig. 3). By applying axial pressure on the bolt end, bolts 3.1 are brought back to their engaged position. The clutch is ready for operation when all clutch overload elements are engaged.

Maintenance

The EAS[®]-HT safety clutches do not require special maintenance work. They are largely protected against dust and humidity, they have an initial grease filling and are therefore mainly maintenance-free.

EAS[®]-elements Please find a detailed description in the respective Installation and Operational Instructions (go to www.mayr.com). Special maintenance work may be necessary, however, if the device is subject to large amounts of dirt or dust or is operating in extreme ambient conditions.

In this case, please contact the manufacturer.

Mounting onto the shaft:

In a standard delivery, the EAS[®]-HT safety clutches are delivered with a finish bore and a keyway acc. DIN 6885/1 P9. The clutch can be secured axially onto the shaft e.g. using a washer and a screw, screwed into the shaft threaded centre hole.

Optionally, we deliver a frictionally-locking shaft-hub connection (see EAS[®]-HT options, page 19).

Technical explanations EAS®-HT safety clutch

Pre-selection of the clutch

Drive lines in heavy engineering are robust and designed for operation in adverse conditions. In contrast to systems with servomotor-driven drives, the torque course and the system behaviour often cannot be determined precisely.

Frequently, only the drive power of the motor and the permitted max. torque of the gear output are known.

Using tried-and-tested operating factors, clutch sizes suitable for the application can be pre-selected.

Pre-selection

$$T_N = \frac{9550 \times P}{n} \quad [\text{Nm}]$$

$$T_G \approx T_N \times K_B \quad [\text{Nm}]$$

Names:		
T_N	[Nm]	Nominal torque of the motor
T_G	[Nm]	Pre-selected release torque on the overload clutch
P	[KW]	Input power motor
n	[rpm]	Speed
K_B	[-]	Service factor

Service factors:		
2.5 - 3	medium impacts	Stirring units / pumps (viscid fluids) / kneading machines / mixing systems / conveyor belts / etc.
3 - 5	high impacts	Shredding machines / centrifuges / crushers / roll trains / construction machines / mining machines / etc.

In normal operation, the EAS®-HT transmits the set overload torque via positive locking. All torques for normal operation, including torque peaks, must be transmitted safely and must not cause the safety clutch to respond.

Often, the actual complex of loads (impacts) during operation (e.g. for shredding machines / mixers) are not known and can only be measured in the system with great effort.

Using software specially developed for the purpose, it is possible to simulate the behaviour in case of collisions of such drive lines.

The prerequisite is that all specifications are known:

- Mass moments of inertia
- Rigidities of all overload elements, including the overload clutch
- Parameters of the motor and the control circuit



Particularly in case of load-side vibration generation (e.g. piston compressors / shredding machines / etc.) or alternating torques **please contact us** to select a reliable, tried and tested overload protection for your production systems.

Here, the overload clutch is combined with suitable clutches, depending on the application:

- Elastomer coupling
- Shaft Couplings
- Curved-tooth coupling

Profit from our many years of market and application experience in different branches.

Technical explanations EAS[®]-HT safety clutch

Misalignment compensation capability of the different shaft misalignment compensation couplings

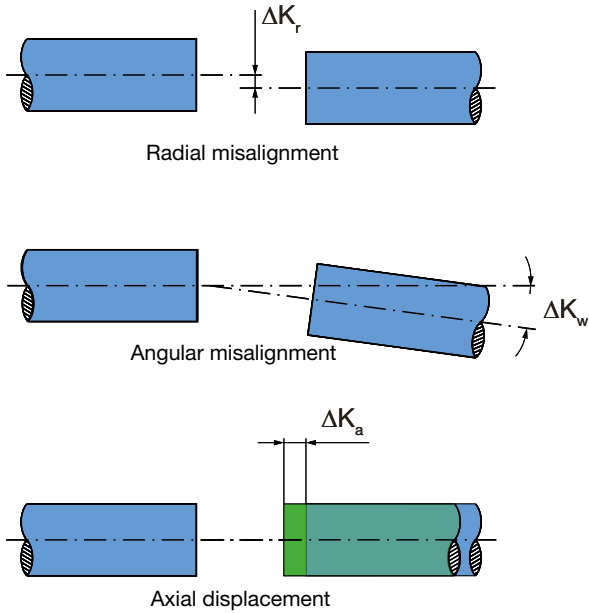


Fig. 4

Shaft Misalignment

Misalignments between shafts occur due to manufacturing and assembly tolerances, bearing backlash and temperature influences.

This can cause axial, radial and angular shaft misalignment.

The shaft misalignment compensation coupling of the EAS-HT safety clutch can compensate for misalignments.

The misalignment possibilities of the shaft misalignment compensation coupling are general guideline values (see table "Technical Data").

In the application, the aim is to produce as precise a shaft alignment as possible, so that the bearing loads are reduced to a minimum.

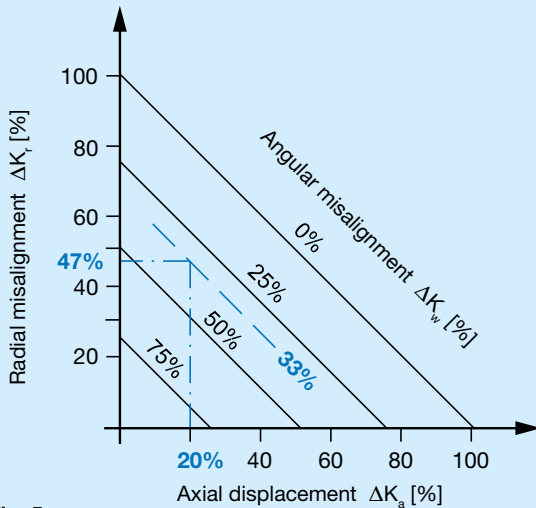


Fig. 5

If more than one kind of misalignment takes place simultaneously, they influence each other. The permitted misalignment values are dependent on one another. The sum total of the actual misalignments – in percent of the maximum value – must not exceed 100 %.

Example:

EAS[®]-HT lastic, Size 8


Type 4053.00400.0

- Axial displacement** occurrence:
 $\Delta K_a = 0.5$ mm; equals **20** % of the permitted maximum value $\Delta K_a = 2.5$ mm
- Angular misalignment** occurrence:
 $\Delta K_w = 0.1$ mm, equals **33** % of the permitted maximum value $\Delta K_w = 0.3$ mm
- Radial displacement** occurrence:
 $\Delta K_r = 0.14$ mm, equals **47** % of the permitted maximum value $\Delta K_r = 0.3$ mm

Product Summary


Safety Clutches/Overload Clutches

- ❑ **EAS®-Compact®/EAS®-NC**
Positive locking and completely backlash-free torque limiting clutches
- ❑ **EAS®-smartic®**
Cost-effective torque limiting clutches, quick installation
- ❑ **EAS®-element clutch/EAS®-elements**
Load-disconnecting protection against high torques
- ❑ **EAS®-axial**
Exact limitation of tensile and compressive forces
- ❑ **EAS®-Sp/EAS®-Sm/EAS®-Zr**
Load-disconnecting torque limiting clutches with switching function
- ❑ **ROBA®-slip hubs**
Load-holding, frictionally locked torque limiting clutches
- ❑ **ROBA®-contitorque**
Magnetic continuous slip clutches
- ❑ **EAS®-HSC/EAS®-HSE**
High-speed safety clutches for high-speed applications

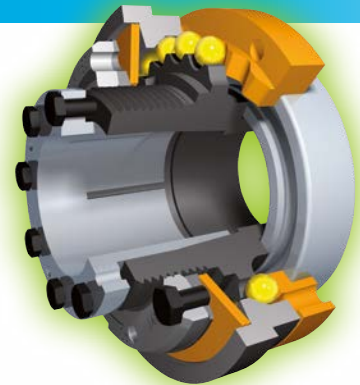


Shaft Couplings

- ❑ **smartflex®/primeflex®**
Perfect precision couplings for servo and stepping motors
- ❑ **ROBA®-ES**
Backlash-free and damping for vibration-sensitive drives
- ❑ **ROBA®-DS/ROBA®-D**
Backlash-free, torsionally rigid all-steel couplings
- ❑ **ROBA®-DSM**
Cost-effective torque-measuring couplings

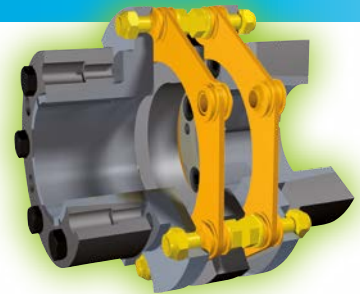


Electromagnetic Brakes/Clutches

- ❑ **ROBA-stop® standard**
Multifunctional all-round safety brakes
- ❑ **ROBA-stop®-M motor brakes**
Robust, cost-effective motor brakes
- ❑ **ROBA-stop®-S**
Water-proof, robust monoblock brakes
- ❑ **ROBA-stop®-Z/ROBA-stop®-silenzio®**
Doubly safe elevator brakes
- ❑ **ROBA®-diskstop®**
Compact, very quiet disk brakes
- ❑ **ROBA®-topstop®**
Brake systems for gravity loaded axes
- ❑ **ROBA®-linearstop**
Backlash-free brake systems for linear motor axes
- ❑ **ROBA®-guidestop**
Backlash-free holding brake for profiled rail guides
- ❑ **ROBATIC®/ROBA®-quick/ROBA®-takt**
Electromagnetic clutches and brakes, clutch brake units

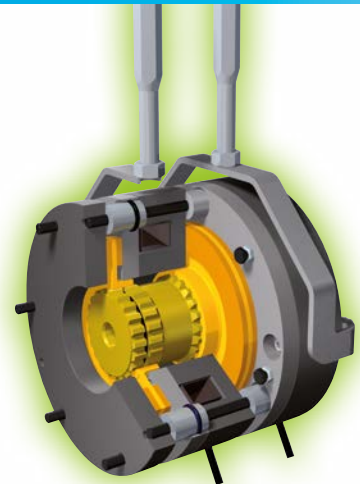

DC Drives

- ❑ **tendo®-PM**
Permanent magnet-excited DC motors

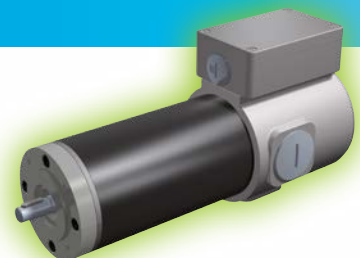



Headquarters

Chr. Mayr GmbH + Co. KG
Eichenstraße 1, D-87665 Mauerstetten
Tel.: +49 83 41/8 04-0, Fax: +49 83 41/80 44 21
www.mayr.com, E-Mail: info@mayr.com



your reliable partner

Service Germany

Baden-Württemberg

Esslinger Straße 7
 70771 Leinfelden-Echterdingen
 Tel.: 07 11/45 96 01 0
 Fax: 07 11/45 96 01 10

Bavaria

Eichenstraße 1
 87665 Mauerstetten
 Tel.: 0 83 41/80 41 04
 Fax: 0 83 41/80 44 23

Chemnitz

Bornaer Straße 205
 09114 Chemnitz
 Tel.: 03 71/4 74 18 96
 Fax: 03 71/4 74 18 95

Franken

Unterer Markt 9
 91217 Hersbruck
 Tel.: 0 91 51/81 48 64
 Fax: 0 91 51/81 62 45

Hagen

Im Langenstück 6
 58093 Hagen
 Tel.: 0 23 31/78 03 0
 Fax: 0 23 31/78 03 25

Kamen

Lünener Straße 211
 59174 Kamen
 Tel.: 0 23 07/23 63 85
 Fax: 0 23 07/24 26 74

North

Schiefer Brink 8
 32699 Extertal
 Tel.: 0 57 54/9 20 77
 Fax: 0 57 54/9 20 78

Rhine-Main

Hans-Böckler-Straße 6
 64823 Groß-Umstadt
 Tel.: 0 60 78/7 82 53 37
 Fax: 0 60 78/9 30 08 00

Branch office

China

Mayr Zhangjiagang
 Power Transmission Co., Ltd.
 Fuxin Road No.7, Yangshe Town
 215637 Zhangjiagang
 Tel.: 05 12/58 91-75 67
 Fax: 05 12/58 91-75 66
 info@mayr-ptc.cn

Great Britain

Mayr Transmissions Ltd.
 Valley Road, Business Park
 Keighley, BD21 4LZ
 West Yorkshire
 Tel.: 0 15 35/66 39 00
 Fax: 0 15 35/66 32 61
 sales@mayr.co.uk

France

Mayr France S.A.S.
 Z.A.L. du Minopole
 Rue Nungesser et Coli
 62160 Bully-Les-Mines
 Tel.: 03.21.72.91.91
 Fax: 03.21.29.71.77
 contact@mayr.fr

Italy

Mayr Italia S.r.l.
 Viale Veneto, 3
 35020 Saonara (PD)
 Tel.: 0498/79 10 20
 Fax: 0498/79 10 22
 info@mayr-italia.it

Singapore

Mayr Transmission (S) PTE Ltd.
 No. 8 Boon Lay Way Unit 03-06,
 TradeHub 21
 Singapore 609964
 Tel.: 00 65/65 60 12 30
 Fax: 00 65/65 60 10 00
 info@mayr.com.sg

Switzerland

Mayr Kupplungen AG
 Tobeläckerstraße 11
 8212 Neuhausen am Rheinfall
 Tel.: 0 52/6 74 08 70
 Fax: 0 52/6 74 08 75
 info@mayr.ch

USA

Mayr Corporation
 10 Industrial Avenue
 Mahwah
 NJ 07430
 Tel.: 2 01/4 45-72 10
 Fax: 2 01/4 45-80 19
 info@mayrcorp.com

Representatives



Drive Systems Pty Ltd
 12 Sommersby Court | Lysterfield | Victoria 3156 | Australia
 Phone: +61(0) 3 9759 7100
 Email: info@drivesystems.com.au
 Web: www.drivesystems.com.au

Poland

Wamex Sp. z o.o.
 ul. Pozaryskiego, 28
 04-703 Warszawa
 Tel.: 0 22/6 15 90 80
 Fax: 0 22/8 15 61 80
 wamex@wamex.com.pl

South Korea

Mayr Korea Co. Ltd.
 Room No.1002, 10th floor,
 Nex Zone, SK TECHNOPARK,
 77-1, SungSan-Dong,
 SungSan-Gu, Changwon, Korea
 Tel.: 0 55/2 62-40 24
 Fax: 0 55/2 62-40 25
 info@mayrkorea.com

Japan

MATSUI Corporation
 2-4-7 Azabudai
 Minato-ku
 Tokyo 106-8641
 Tel.: 03/35 86-41 41
 Fax: 03/32 24 24 10
 k.goto@matsui-corp.co.jp

Netherlands

Groneman BV
 Amarilstraat 11
 7554 TV Hengelo OV
 Tel.: 074/2 55 11 40
 Fax: 074/2 55 11 09
 aandrijftechnik@groneman.nl

Taiwan

German Tech Auto Co., Ltd.
 No. 28, Fenggong Zhong Road,
 Shengang Dist.,
 Taichung City 429, Taiwan R.O.C.
 Tel.: 04/25 15 05 66
 Fax: 04/25 15 24 13
 abby@zfgta.com.tw

Czech Republic

BMC BALTAS s. r. o.
 Hvězdoslavova 29 b
 62700 Brno
 Tel.: 05/45 22 60 47
 Fax: 05/45 22 60 48
 info@bmcaltas.cz

More representatives:

Austria, Belgium, Brazil, Canada, Denmark, Finland, Greece, Hongkong, Hungary, Indonesia, Israel, Luxembourg, Malaysia, New Zealand, Norway, Philippines, Romania, Russia, Slovakia, Slovenia, South Africa, Spain, Sweden, Thailand, Turkey

You can find the complete address for the representative responsible for your area under www.mayr.com in the internet.