



planet



Retarder prover cabinets 20 trays 60x40 / 60x80



The retarder-prover cabinets in the PLANET series are designed for the best management of the proving cycle, controlling temperature, conservation, proving times, and relative humidity with maximum security and precision. Made to the highest quality standards, "PLANET" cabinets are entirely in AISI 304 stainless steel and constructed in one-piece structure with 75mm thick high density polyurethane insulation. They have pressed bottom with rounded corners for an easy cleaning and are equipped with air ducts specially designed to give uniform air circulation. The inside humidity is produced by a steam generator and is controlled and regulated by the "touch" 5" electronic control board easy and intuitive to use with the possibility to memorized up to 100 programs (10 favorite) and the selection of 7 languages. The cabinets can accomodate 40x60cm and 60x80cm trays.



TECHNICAL DATA:

		AFLV/20	AFLV/40
Insulation thickness	mm	75	75
External dimensions (WxDxH)	mm	790x690x2140	790x1080x2140
Capacity	lt	500	900
Doors	nr	1	1
Trays capacity	nr	20 600x400	40 600x400
Standard fitting (pair of runners)	nr	20	20
Pitch (74 positions)	mm	16,5	16,5
Electronic control		5" touch screen control board	5" touch screen control board
Type of refrigeration		indirect soft ventilated	indirect soft ventilated
Temperature	°C	-10/+35	-10/+35
Type of defrost		automatic with hot gas	automatic with hot gas
Evaporation of condensation water		automatic	automatic
Max absorbed power *	W	1250	1785
Refrigerated power*	W	675	1063
Gas		R290	R290
Input voltage		1x230V/50Hz	1x230V/50Hz
Climat class		5	5

*Evap. -10°C cond. +45°C / EN 12900

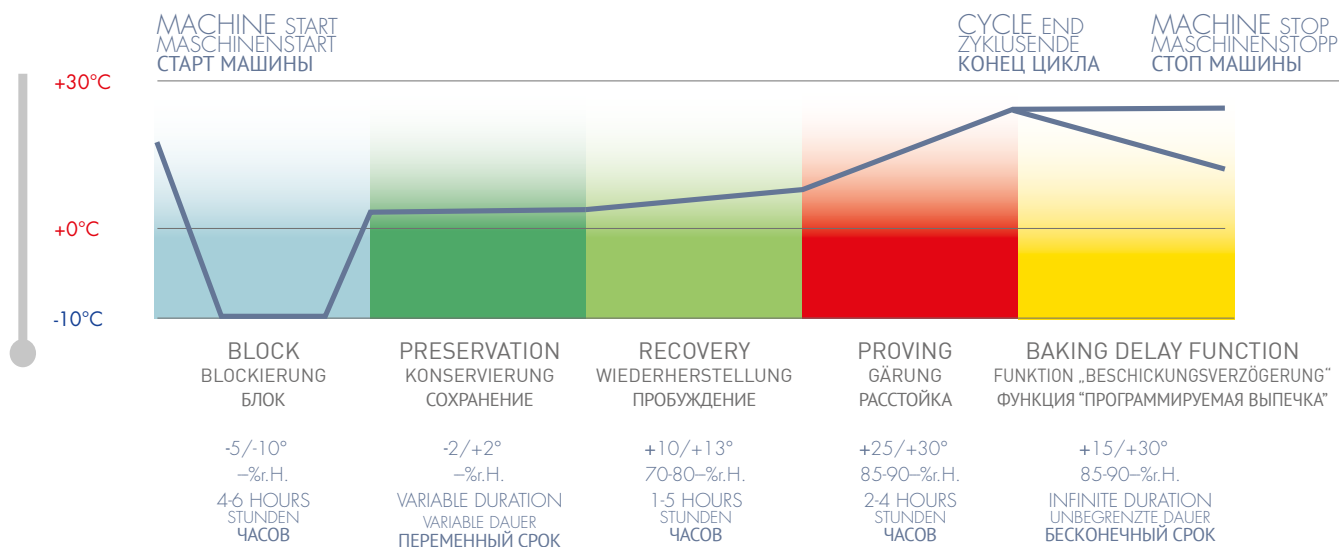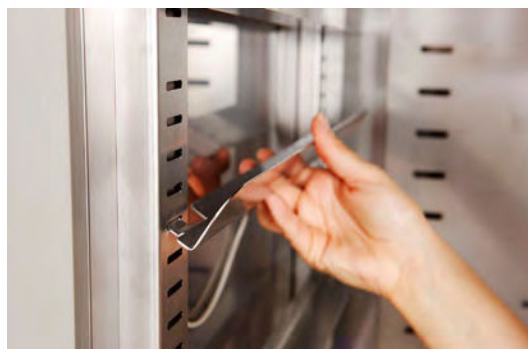

Humidity control
by electrical probe



Delay function
"baking"



Ventilation control
in all working phases



Data download
USB device


ACCESSORIES AND OVERPRICES ON REQUEST:



Pair of runners for trays 60x40

Rilsan rack cm 60x40

Inox rack cm 60x40



Pair of runners for trays 60x80

Rilsan rack cm 60x80

Inox rack cm 60x80



S/s tray cm 40x60x2h

S/s tray cm 40x60x3h



S/s tray cm 40x80x2h

Glass door with internal led light (overprice)



Kit 4 castors Ø100 mm



Prearranged version with valve system (deduction)




Wi-Fi supervising system (overprice)



Input 60Hz (overprice)

INSTALLATION DIAGRAM AFLV/20:

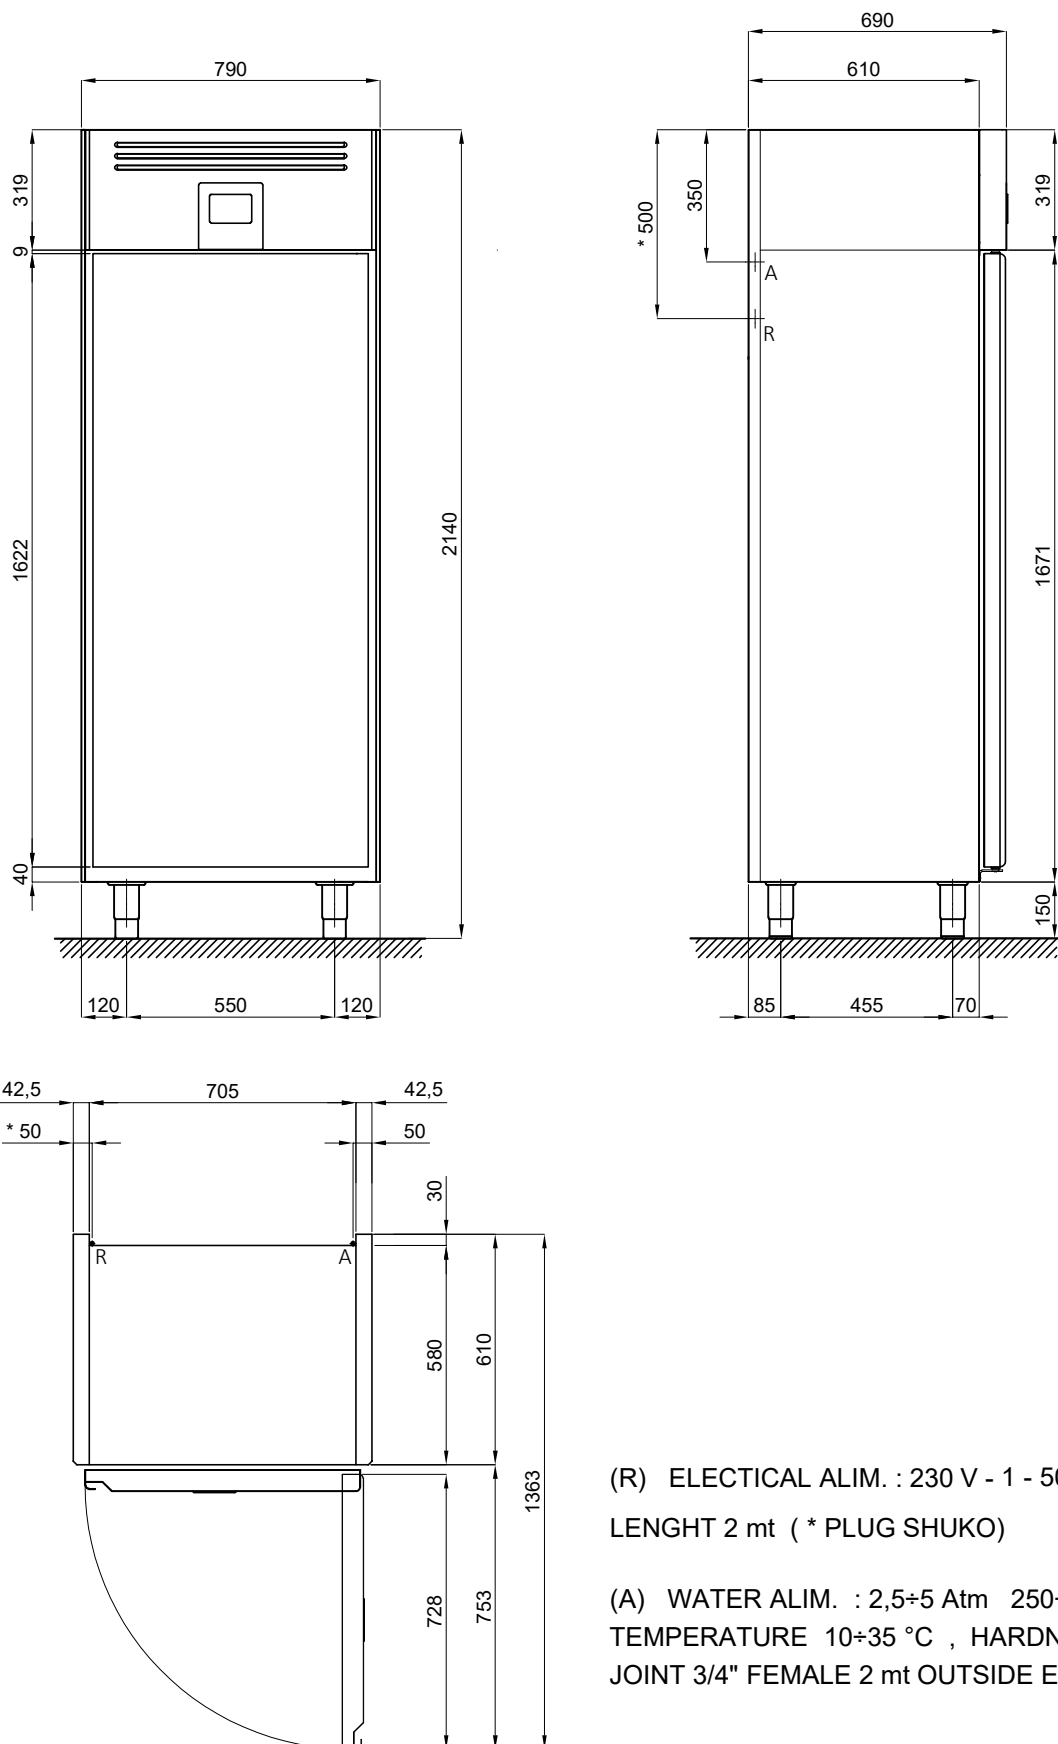


(R) ELECTRICAL ALIM. : 230 V - 1 - 50Hz

LENGTH 2 mt (* PLUG SHUKO)

(A) WATER ALIM. : 2,5÷5 Atm 250÷500 KPa
TEMPERATURE 10÷35 °C , HARDNESS 1÷8 °F
JOINT 3/4" FEMALE 2 mt OUTSIDE EQUIPMENT

INSTALLATION DIAGRAM AFLV/40:

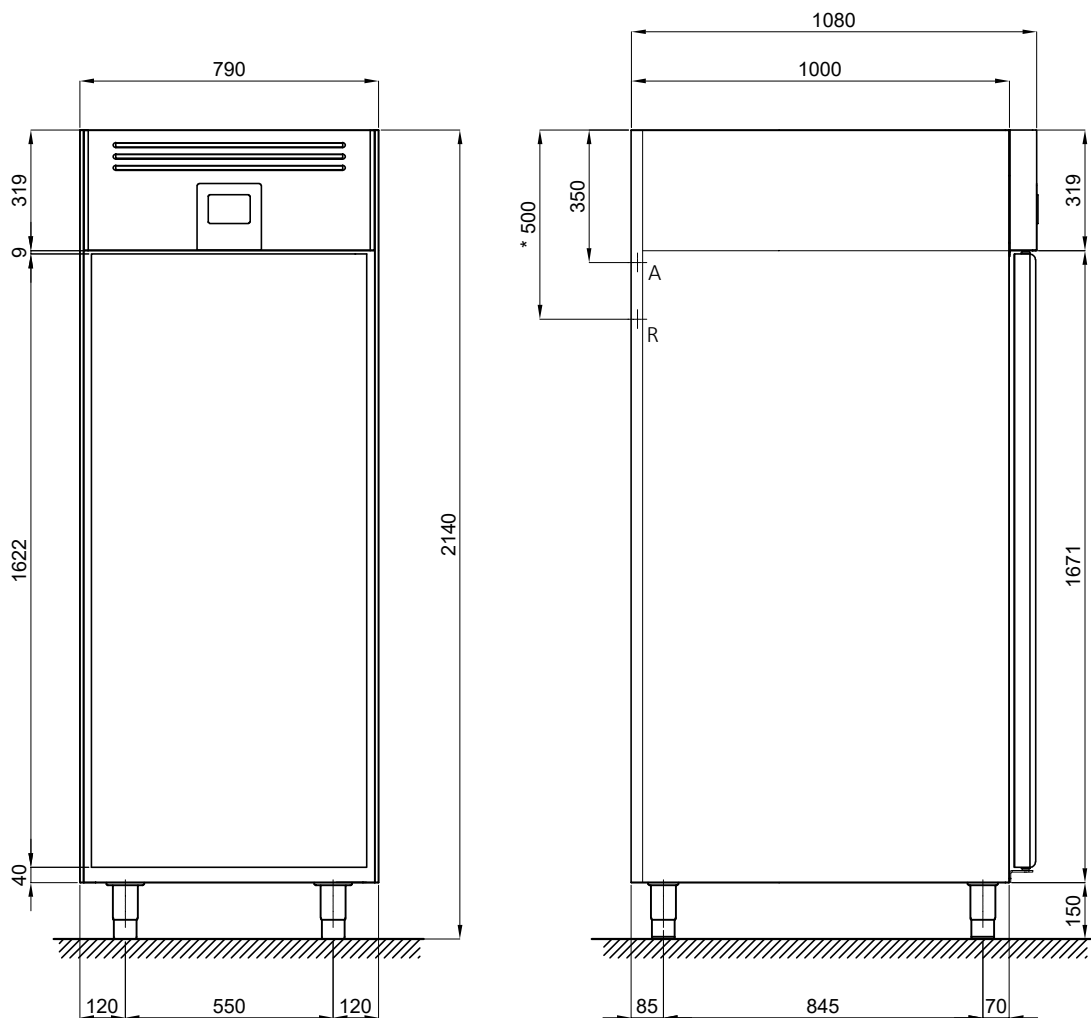

(R) ELECTRICAL ALIM.: 230 V - 1 - 50Hz
 LENGHT 2 mt (* PLUG SHUKO)
 (A) WATER ALIM. : 2,5÷5 Atm 250÷500 KPa
 TEMPERATURE 10÷35 °C , DUREZZA 1÷8 °F
 JOINT 3/4" FEMALE 2 mt OUTSIDE EQUIPMENT

