

UTILITY80



LAYOUT

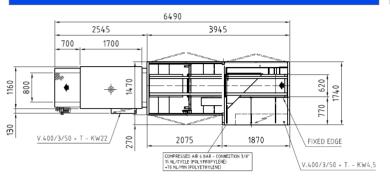

PRODUCT FLOW

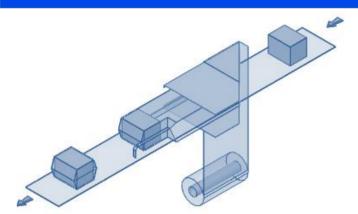



SELECTION OF PACKAGING VARIATIONS











DESCRIPTION

This is an automatic wrapping machine with a continuous side sealing system for packing a large variety of medium industrial products both with P.E or P.P. film. It can pack shrunk packs if combined with a shrink tunnel 80-40,

OTHER TECHNICAL SPECIFICATIONS

Wrapping material	Polypropylene (P.P.) of 11-25 μ pre-
	perforated film
	C-Folded film reel
	Polyethylene (P.E.) of 26-60 μ pre-
	perforated film
	C-Folded film reel
Final packaging result	Fully closed pack with a lateral
	lengthwise welding, two horizontal
	front/back weldings (shrink-wrapped /
	optional)

TECHNICAL SPECIFICATIONS

Product Dimensions		Min	Max
Width		80	600
Length	mm	150	6000
Height		30	370
Mechanical Speed	Up to 30 packs/min		

MATCHABLE UNITS/OPTIONALS

Pack format	Printed film registration unit	
Film reel end pre-alarm	Optical barrier for small products	
Extra weight acceptable 25 Kg per meter linear)	Configuration for PP film reels	
Remote connection module		



